The documentation and process conversion measures necessary to comply with this revision shall be completed by 5 March 2000.

METRIC

MIL-PRF-19500/629B
5 December 1999
SUPERSEDING
MIL-PRF-19500/629A
12 June 1997

PERFORMANCE SPECIFICATION

SEMICONDUCTOR DEVICE, HERMETIC, DIODE, SILICON, RECTIFIER,
SCHOTTKY BARRIER, TYPES 1N6702 AND 1N6702US
JAN, JANTX, JANTXV, JANJ, JANS, JANHC, AND JANKC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for silicon, Schottky barrier rectifier diodes. Five levels of product assurance are provided for each encapsulated device type as specified in MIL-PRF-19500, and two levels of product assurance for each unencapsulated die (element evaluation).

1.2 Physical dimensions. See figures 1 (similar to DO – 41), 2 (D-5C), and 3 (JANHC and JANKC die) dimensions.

1.3 Maximum ratings.

Types	V_{RWM} (1)	I_{O1} (2)	I_{FSM}	T_{STG}	T_J
	V (pk)	A dc	A (pk)	°C	°C
1N6702, 1N6702US	40	5.0	150	-65 to +150	-65 to +125

(1) Derate linearly at 1.2 V/ °C above T_L or T_{EC} = +90 °C where T_L is at L = 9.52 mm (0.375 inch).
(2) Derate linearly at 71 mA/ °C above T_L or T_{EC} = +55 °C where T_L is at L = 9.52 mm (0.375 inch).

1.4 Primary electrical characteristics. Unless otherwise specified, primary electrical characteristics at T_A = +25 °C.

Types	Max V_{FM1}	Max V_{FM2}	Max V_{FM3}	Max I_{RM} V_{RM} = 40 V dc pulsed method (see 4.5.1)		Max $R_{\theta JL}$ or $R_{\theta JEC}$	Max $Z_{\theta JX}$
	I_{FM} = 3.0 A	I_{FM} = 5.0 A	I_{FM} = 15.7 A	T_J = +25 °C I_{RM1}	T_J = +100 °C I_{RM2}	9.52 mm(0.375 inch) lead length or end cap	
	(pk)	V (pk)	V (pk)	mA	MA	°C/W	°C/W
1N6702	0.44	0.47	0.60	0.20	25.0	20	2.5
1N6702US	0.44	0.47	0.60	0.20	25.0	10	2.5

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAC, 3990 East Broad Street, Columbus, OH 43216-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:21Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

DEPARTMENT OF DEFENSE

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Defense Automated Printing Service, Building 4D (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified manufacturer's list before contract award (see 4.2 and 6.3).

3.2 Associated detail specification. The individual item performance requirements shall be in accordance with MIL-PRF-19500, and as specified herein.


3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.4 Interface requirements and physical dimensions. The interface requirements and physical dimensions shall be as specified in MIL-PRF-19500 and on figures 1 (similar to DO – 41), 2 (D-5C), and 3 (JANHC and JANKC die).

3.4.1 Lead finish. Lead finish shall be solderable as defined in MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4.2 Diode construction. These devices shall be constructed in a manner and using materials which enable the diodes to meet the applicable requirements of MIL-PRF-19500 and this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:21Z
Check the source to verify that this is the current version before use.

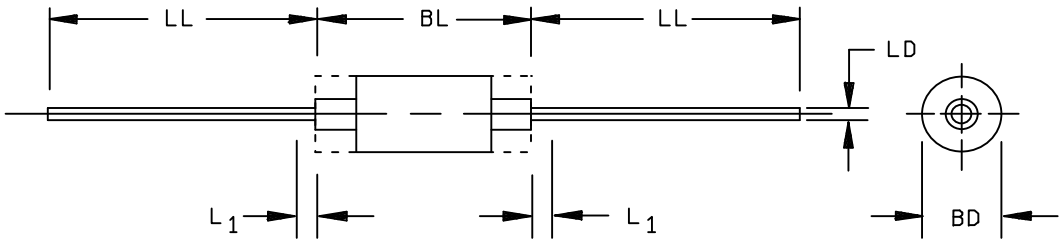


Symbol	Dimensions				Notes
	Millimeters		Inches		
	Min	Max	Min	Max	
LD	1.19	1.37	0.047	0.054	
BD	3.68	4.70	0.145	0.185	3
BL	3.81	7.62	0.150	0.300	
LL	25.40	33.02	1.000	1.300	
L_1		1.27		0.050	4

NOTES:
1. Dimensions are in millimeters.
2. Inch-pound equivalents are given for general information only.
3. Symbol BD shall be measured at the largest diameter.
4. Lead diameter is not controlled in this zone to allow for flash, lead finish build-up, and mirror irregularities other than heat slugs.

FIGURE 1. Physical dimensions (similar to DO – 41).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:21Z
Check the source to verify that this is the current version before use.

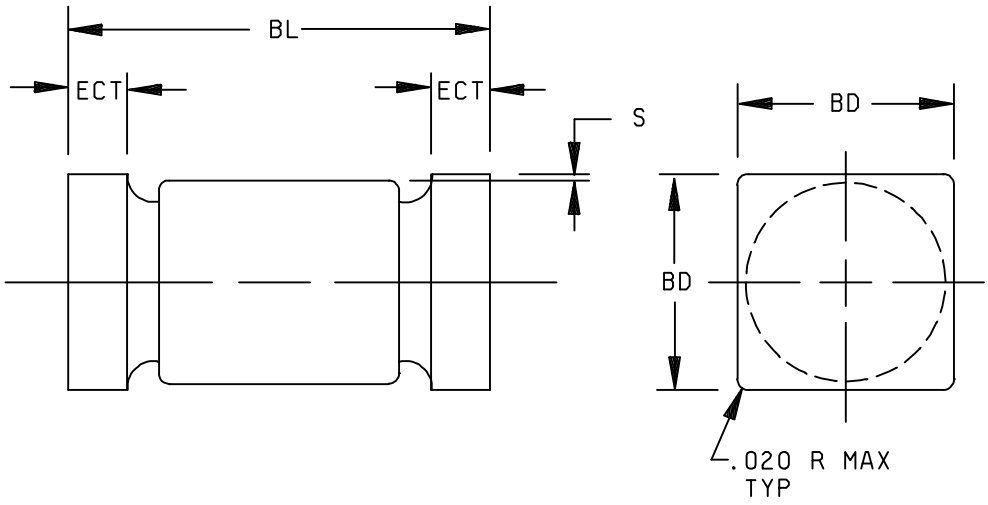


Symbol	Dimensions			
	Millimeters		Inches	
	Min	Max	Min	Max
BL	5.20	6.22	0.205	0.245
BD	4.65	5.13	0.183	0.202
ECT	0.48	0.71	0.019	0.028
S	0.08		0.003	

NOTES:
1. Dimensions are in millimeters.
2. Inch-pound equivalents are given for general information only.
3. In accordance with ANSI Y14.5M, diameters are equivalent to ∅X symbology.

FIGURE 2. Physical dimensions of surface mount family, (D-5C).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:21Z
Check the source to verify that this is the current version before use.

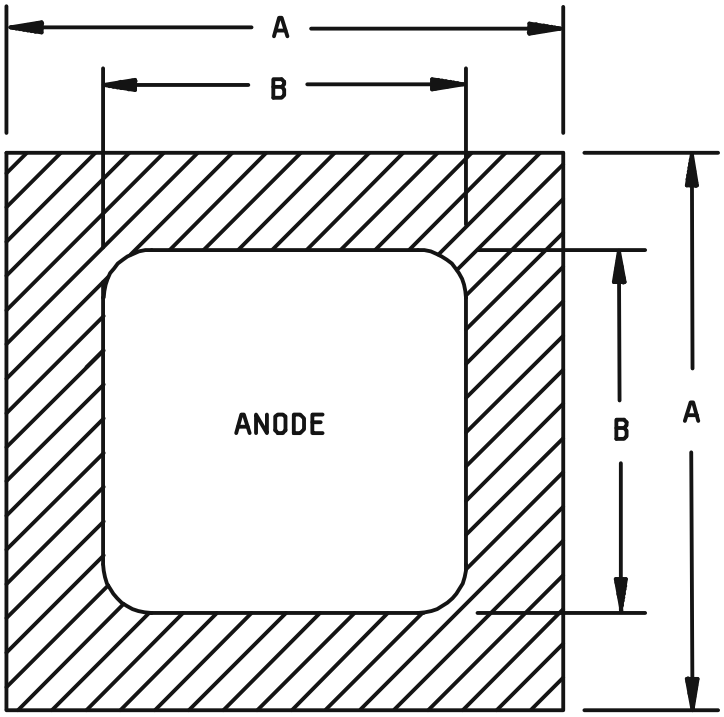

Symbol	Dimensions			
	Millimeters		Inches	
	Min	Max	Min	Max
A	2.24	2.29	0.088	0.090
B	1.98	2.03	0.078	0.080

Design data

Metallization:
Top: (Anode) . . . . . Al
Back: (Cathode). . . . . Au

AL thickness. . . . . 25,000 Å minimum.
Gold thickness . . . . . 4,000 Å minimum.
Chip thickness . . . . . 0.254 mm (10 mils) ± 0.051 (2 mils).

FIGURE 3. JANHC and JANKC (A-version) die dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:21Z
Check the source to verify that this is the current version before use.

3.4.2.1 Surface mount (US). The surface mount (US) version shall be considered structurally identical to the non surface mount (US) version except for lead attach.

3.5 Marking. Devices shall be marked as specified in MIL-PRF-19500.

3.5.1 Marking for surface mount US devices. Surface mount (US) suffix parts are to be marked with the polarity identification. Initial container package marking will be in accordance with MIL-PRF-19500.

3.6 Polarity. The polarity of all types shall be indicated with a contrasting color band to denote the cathode end. Alternatively, for US suffix devices, a minimum of three contrasting color dots spaced around the periphery on the cathode end may be used.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500.

4.2.1 Group E inspection. Group E inspection shall be conducted in accordance with MIL-PRF-19500 and herein.

4.2.2 Construction verification. Cross sectional photos from three devices shall be submitted in the qualification report.

4.2.3 JANHC and JANKC die devices. Qualification for these devices shall be in accordance with MIL-PRF-19500. This testing may be performed in a TO-5 package in lieu of the axial leaded package.

4.2.3 JANJ qualification. For JANJ level, 3.3.1 through 3.3.1.3 of MIL-PRF-19500 shall apply, except as modified herein. Supplier imposed requirements as well as alternate screens, procedures, and/or controls shall be documented in the QM plan and must be submitted to the Qualifying Activity for approval. When alternate screens procedures, and/or process controls are used in lieu of the JANJ screens herein equivalency shall be proven and documented in the QM Plan. Radiation characterization may be submitted in the QM plan at the option of the manufacturer, however, paragraph 3.3.1.1 of MIL-PRF-19500 is not required. Lot formation and Conformance Inspection requirements for JANJ shall be those used for JANTXV devices as a minimum. Die lot controls and rework requirements shall be in accordance with MIL-PRF-19500 paragraphs 3.13 and D.3.13.2.1.

4.2.3.1 JANJ Qualification. For JANJ qualification, 4.4.2.1 herein shall be performed as required by the Qualifying Activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:21Z
Check the source to verify that this is the current version before use.

4.3 Screening (JAN, JANTX, JANTXV, JANJ, and JANS levels only). Screening shall be in accordance with table IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table IV of MIL-PRF-19500)	Measurement	
	JANS Level	JANJ Level
1a 1b	Required Required	Not Required Required
2	Not Required	Not Required
3a 3b 3c (1)	Required Not Applicable Required (see 4.5.3)	Required Not Applicable Required (see 4.5.3)
4, 5, 6 and 7a	Not Applicable	Not Applicable
7b	Required	Required
8	Required	Not Required
9	I_{R1} and V_{FM2}	I_{R1} and V_{FM2}
10 (2)	Required T_A = 90°C; V_{RWM} = 40 V(pk); I_O = 0, half sine wave, f = 60 Hz	Required T_A = 90°C; V_{RWM} = 40 V(pk); I_O = 0, half sine wave, f = 60 Hz
11	Required $\Delta I_{R1} \leq$ 100 percent of initial reading or .05 mA whichever is greater. $\Delta V_{FM2} \leq \pm$ 50 mV dc.	Required $\Delta I_{R1} \leq$ 100 percent of initial reading or .05 mA whichever is greater. $\Delta V_{FM2} \leq \pm$ 50 mV dc.
12	Required See 4.3.2	Required See 4.3.2, t = 240 hours.
13	Required Subgroup 2 of table I herein; $\Delta I_{R1} \leq$ 100 percent of initial reading or 0.05 mA whichever is greater; $V_{FM2} \leq \pm$ 50 mV dc.	Required Subgroup 2 of table I herein; $\Delta I_{R1} \leq$ 100 percent of initial reading or 0.05 mA whichever is greater; $V_{FM2} \leq \pm$ 50 mV dc.
14a 14b	Not Applicable Optional (3)	Not Applicable Optional (3)
15	Required	Required Attributes Data only Film or Non-Film Techniques may be utilized
16	Required	Required
17	Not Required	Required Subgroup 2 of table I herein

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:21Z
Check the source to verify that this is the current version before use.

4.3 Screening (JAN, JANTX, JANTXV, JANJ, and JANS levels only) Continued.

Screen (see table IV of MIL-PRF-19500)	Measurement	
	JANTXV and JANTX Level	JAN level
1a 1b	Not Required Required (JANTXV only)	Not Required Not Required
2	Not Required	Not Required
3a 3b 3c (1)	Temperature cycling Not Applicable Thermal impedance (see 4.5.3)	Temperature cycling in accordance with MIL-PRF-19500, JANTX level Not Applicable Thermal impedance (see 4.5.3)
4, 5, 6 and 7a	Not Applicable	Not Applicable
7b	Required	Not Required
8	Not Required	Not Required
9	Not Applicable	Not Applicable
10 (2)	T_A = 90°C; V_{RWM} = 40 V(pk); I_O = 0, half sine wave, f = 60 Hz	Not Applicable
11	I_{R1} and V_{FM2}	Not Applicable
12	See 4.3.2, t = 48 hours	Not Applicable
13	Subgroup 2 of table I herein; $\Delta I_{R1} \leq$ 100 percent of initial reading or .05 mA whichever is greater; $V_{FM2} \leq \pm$ 50 mV dc.	Not Applicable
14a 14b	Not Applicable Optional (3)	Not Required Optional (3)
15, 16, and 17	Not Required	Not Required

(1) Thermal impedance shall be performed any time after sealing provided temperature cycling is performed in accordance with appendix E, table IV of MIL-PRF-19500, screen 3 prior to this thermal test.
(2) Junction temperature (T_J) is not to exceed 100°C at V_{RWM}. T_J is affected by the device mounting thermal resistance when parasitic power is generated by the temperature dependent leakage current. Until this leakage becomes significant near thermal runaway, T_J remains approximately equal to T_A or T_L for I_O = 0.
(3) Per MIL-PRF-19500.

4.3.1 Screening (JANHC or JANKC). Screening of die shall be in accordance with MIL-PRF-19500. As a minimum, die shall be 100 percent probed in accordance with group A, subgroup 2, except for thermal impedance.

4.3.2 Burn-in conditions. Burn-in conditions are as follows: I_F = 5 A dc min. T_A = room ambient as defined in the general requirements of MIL-STD-750 (see 4.5). Mounting and test conditions in accordance with MIL-STD-750, method 1038, test condition B.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:21Z
Check the source to verify that this is the current version before use.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, table V, and table I herein. The following test conditions shall be used for $Z_{\theta JX}$, group A inspection:

a. I_M measurement current .....1 mA to 10 mA.

b. I_H forward heating current .....10 A to 20 A.

c. t_H heating time.....10 ms.

d. t_{MD} measurement delay time.....100 µs maximum.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in tables VIa (JANS) and VIb (JAN, JANTX, JANTXV and JANJ) of MIL-PRF-19500 and as follows. Electrical measurements (end-points) and delta requirements shall be in accordance with the applicable steps of table I, group A, subgroup 2 herein.

4.4.2.1 Group B inspection, table VIa (JANS) of MIL-PRF-19500.

Subgroup	Method	Condition
B3	4066	I_{FSM} = 150 A (pk), condition A 2, I_O = 5 A dc; T_A = room ambient as defined in the general requirements of MIL-STD-750 (see 4.5); 5 surges of 8.3 ms each at 1 minute intervals.
B4	1036	I_F = 5.0 A dc; T_A = room ambient as defined in the general requirements of MIL-STD-750 (see 4.5); $t_{on} = t_{off}$; 3 minutes minimum for 2,000 cycles.
B5	1027	T_A = 90°C; V_{RWM} = 40 V(pk); I_O = 0, half sine wave, f = 60 Hz. T_A adjusted to achieve T_J = +110°C minimum.
B6	3101	$R_{\theta JL}$ = 20°C/W; L = 9.52 mm (0.375 inch) lead length (non-surface mount). $R_{\theta JEC}$ = 10°C/W (surface mount).

4.4.2.2 Group B inspection table VIb (JAN, JANTX, JANTXV and JANJ) of MIL-PRF-19500.

Subgroup	Method	Condition
B2	4066	I_{FSM} = 150 A (pk), condition A 2, I_O = 5 A dc; T_A = room ambient as defined in the general requirements of MIL-STD-750 (see 4.5); 5 surges of 8.3 ms each at 1 minute intervals.
B3	1027	T_A = 90°C; V_{RWM} = 40 V(pk); I_O = 0, half sine wave, f = 60 Hz. T_A adjusted to achieve T_J = +110°C minimum.
B4	2075	In accordance with 4.5.2.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500. Electrical measurements (end-points) shall be in accordance with the applicable inspections of table I, group A, subgroup 2 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:21Z
Check the source to verify that this is the current version before use.

4.4.3.1 Group C inspection table VII of MIL-PRF-19500.

Subgroup	Method	Condition
C2	2036	Tension: Test condition A; weight = 20 pounds; t = 15 s. Lead fatigue: Test condition E; weight 1 pounds. NOTE: Both tension and lead fatigue are not applicable for US suffix devices.
C6	1026	T_A = 90°C; V_{RWM} = 40 V(pk); I_O = 0, half sine wave, f = 60 Hz. T_A adjusted to achieve T_J = +110°C minimum.

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with MIL-PRF-19500 and the conditions for subgroup testing herein. Electrical measurements (end-points) shall be in accordance with table I, group A, subgroup 2 herein.

4.4.4.1 Group E inspection, table IX of MIL-PRF-19500. For initial design and process change verification only (one time testing).

Subgroup	Method	Condition	Sampling plan
E1	1051	500 cycles	22 devices, c = 0
E1	1071	Test condition E	22 devices, c = 0
E2	1038	Test condition A, 1,000 hours, See conditions for group C, subgroup 6.	22 devices, c = 0
E3		Not applicable.	
E4	4081 or 3101	$R_{\theta JL}$ = 30°C/W maximum at 9.52 mm (0.375 inch) lead length; $R_{\theta JEC}$ = 10°C/W maximum; method 3101 in accordance with 4.5.3 except I_H = 3 A and T_H = 20 s (minimum)	22 devices, c = 0
E5 and E6		Not applicable	

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in MIL-STD-750.

4.5.2 Steady-state operation life. This test shall be conducted with a half-sine wave of the specified peak voltage impressed across the diode in the reverse direction followed by a half-sine waveform of the specified average rectified current. The forward conduction angle of the rectified current shall not be greater than 180° nor less than 150°.

4.5.3 Thermal impedance. Thermal impedance $Z_{\theta JX}$ measurements shall be performed in accordance with MIL-STD-750, method 3101. The supplier shall develop $Z_{\theta JX}$ screening limits using statistical methods and it shall not exceed the group A $Z_{\theta JX}$ limit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:21Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Thermal impedance	3101	See 4.5.3	$Z_{\theta JX}$		2.5	°C/W
Forward voltage	4011	I_{FM} = 3.0 A (pk) pulse method (see 4.5.1)	V_{FM1}		0.44	V
	4011	I_{FM} = 5.0 A (pk) pulse method (see 4.5.1)	V_{FM2}		0.47	V
	4011	I_{FM} = 15.7 A (pk) pulse method (see 4.5.1)	V_{FM3}		0.60	V
Reverse current leakage	4016	V_{RM} = 40 V (pk) pulse method (see 4.5.1)	I_{RM1}		0.20	mA
Subgroup 3						
High temperature operation:		T_A = +100°C				
Reverse current leakage	4016	V_{RM} = 40 V (pk) pulse method (see 4.5.1)	I_{RM2}		25.0	mA
Forward voltage	4011	I_F = 5.0 A (pk) pulse method (see 4.5.1)	V_{FM4}		0.47	V
Low temperature operation:		T_A = -55°C				
Reverse current leakage	4016	V_{RM} = 40 V (pk) pulse method (see 4.5.1)	I_{RM3}		1.00	mA
Forward voltage	4011	I_F = 5.0 A (pk) pulse method (see 4.5.1)	V_{FM5}		0.62	V

1/ For sampling plan, see MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:21Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. Packaging shall prevent mechanical damage of the devices during shipping and handling and shall not be detrimental to the device. When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Departments' or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Issue of DODISS to be cited in the solicitation (see 2.2.1).

b. The lead finish as specified (see 3.4.1).

c. Type designation and quality assurance level.

d. Packaging requirements (see 5.1).

e. For die acquisition, the JANHC or JANKC letter version shall be specified (see figure 3).

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List QML No.19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Commander, Defense Supply Center Columbus, ATTN: DSCC-VQE, 3990 East Broad Street, Columbus, OH 43216-5000.

6.4 Suppliers of die. The qualified die suppliers with the applicable letter version (e.g., JANHCA1N6702) will be identified on the QML.

JANC ordering information	
PIN	Manufacturer
	55801
1N6702	JANHCA1N6702
1N6702	JANKCA1N6702

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:21Z
Check the source to verify that this is the current version before use.

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA – NA
DLA - CC

Review activities:
Army - AR, MI, SM
Navy - AS, CG, MC
Air Force - 19

Preparing activity:
DLA - CC

(Project 5961- 2106)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-19500/629B	2. DOCUMENT DATE 991205

3. **DOCUMENT TITLE**
SEMICONDUCTOR DEVICE, HERMETIC, DIODE, SILICON, RECTIFIER, SCHOTTKY BARRIER, TYPES 1N5822 AND 1N5822US JAN, JANTX, JANTXV, JANJ, JANS, JANHC, AND JANKC

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) COMMERCIAL DSN FAX EMAIL	7. DATE SUBMITTED

8. PREPARING ACTIVITY

a. Point of Contact Alan Barone	b. TELEPHONE Commercial DSN FAX EMAIL 614-692-0510 850-0510 614-692-6939 alan_barone@dscc.dla.mil
c. ADDRESS Defense Supply Center Columbus, ATTN: DSCC-VAC, 3990 East Broad Street, Columbus, OH 43216-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman, Suite 2533, Fort Belvoir, VA 22060-6221 Telephone (703) 767-6888 DSN 427-6888

DD Form 1426, Feb 1999 (EG) Previous editions are obsolete WHS/DIOR, Feb 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:21Z
Check the source to verify that this is the current version before use.