The documentation and process conversion measures necessary to comply with this revision shall be completed by 16 November 1998

INCH-POUND

MIL-PRF-19500/645A
16 August 1998
SUPERSEDING
MIL-PRF-19500/645
18 April 1997

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON,
POWER RECTIFIER, DUAL, COMMON CATHODE OR ANODE CENTER TAP, ULTRAFAST,
TYPES 1N6772, 1N6773, 1N6772R AND 1N6773R
JAN, JANTX, JANTXV, AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for silicon, dual ultrafast, power rectifier diodes in a center-tap configuration. Four levels of product assurance are provided for each device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1 (T0-257AA, isolated).

1.3 Maximum ratings.

Types	V_{RWM} 1/ I_D = 5 µA dc	I_F 1/2/ T_C =100°C	I_{FSM} 1/ t_p = 8.3 ms	$R_{\theta JC}$ 1/	$R_{\theta JA}$ 1/	T_{STG} and T_{OP}
	V dc	A dc	A(pk)	°C/W	°C/W	° C
1N6772, 1N6772R 1N6773, 1N6773R	400 600	8.0	60	2.5	45	-65 to +150

1/ Each individual diode.
2/ Derate at 160 mA/°C above Tc = +100° C.

1.4 Primary electrical characteristics. Unless otherwise specified, primary electrical characteristics are per diode at +25°C.


Types	V_{F1} I_F = 4 A dc	V_{F2} I_F = 8 A dc	I_{R1} V_R = 0.8 V_{RWM} (See 1.3)	I_{R2} V_R = 0.8 V_{RWM} (See 1.3) T_C = +100°C	t_{rr}	C_J V_R = 5 V f = 1 MHz
	V dc	V dc	µA dc	µA dc	ns	pF
1N6772, 1N6772R 1N6773, 1N6773R	1.45	1.60	10	500	60	200

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center, Columbus, ATTN: DSCC-VA, 3990 East Broad Street, Columbus, Ohio 43216-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:28Z
Check the source to verify that this is the current version before use.

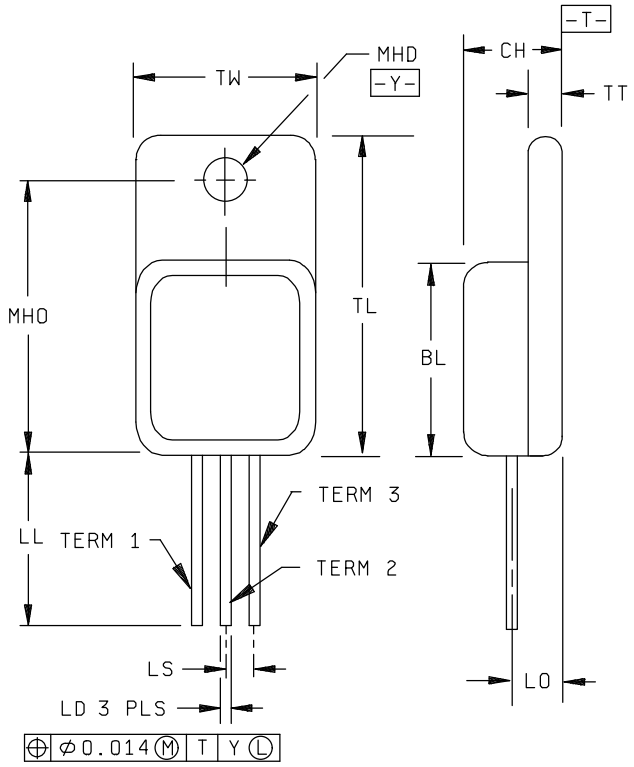


Dimensions				
Symbol	Inches		Millimeters	
	Min	Max	Min	Max
BL	.410	.430	10.4	10.9
CH	.190	.200	4.82	5.10
LD	.025	.035	0.64	0.89
LL	.500	.750	12.70	19.05
LO	.120 typ		3.05 typ	
LS	.100 bsc		2.54 bsc	
MHD	.140	.150	3.55	3.80
MHO	.527	.537	13.4	13.6
TL	.645	.665	16.4	16.9
TT	.035	.045	0.90	1.15
TW	.410	.420	10.4	10.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only. See 3.3.
3. All terminals are isolated from case.


SCHEMATIC

1N6772, 1N6773



Terminal	Description
1	Anode 1
2	Cathode
3	Anode 2

1N6772R, 1N6773R



Terminal	Description
1	Cathode 1
2	Anode
3	Cathode 2

FIGURE 1. Physical dimensions and configuration (T0-257AA).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:28Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Associated specification. The individual item requirements shall be in accordance with MIL-PRF-19500 and as specified herein.

3.2 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.3 Interface requirements and physical dimensions. The interface requirements and physical dimensions shall be as specified in MIL-PRF-19500 and on figure 1 (TO-257AA) herein. Methods used for electrical isolation of the terminal feedthroughs shall employ materials that contain a minimum of 90 percent Al_2O_3(ceramic). Examples of such construction techniques are metallized ceramic eyelets or ceramic walled packages. The preferred measurements used herein is the metric SI system. However, since this item was originally designed using inch-pound units of measurement, in the event of a conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

3.3.1 Lead material and finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish or formation is desired, it shall be specified in the acquisition document (see 6.2). When lead formation is performed, as a minimum, the vendor shall perform 100 percent hermetic seal in accordance with screen 14 of table II of MIL-PRF-19500 and 100 percent DC testing in accordance with group A, subgroup 2 herein.

3.3.2 Polarity. Polarity and terminal configuration shall be in accordance with figure 1 herein.

3.4 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.5 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.6 Electrical test requirements. The electrical test requirements shall be the subgroups specified in 4.4.2 and 4.4.3 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:28Z
Check the source to verify that this is the current version before use.

3.7 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified products list before contract award (see 4.2 and 6.2).

4. VERIFICATION

4.1 Classification of Inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3)

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500, and table III herein.

4.3 Screening (JANTX, JANTXV and JANS levels). Screening shall be in accordance with table IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table IV of MIL-PRF-19500)	Measurement	
	JANS level	JANTX and JANTXV levels
3C 1/	Thermal impedance (see 4.3.2)	Thermal impedance (see 4.3.2)
9 and 10	Not applicable	Not applicable
11	I_{R1} and V_{F2}	I_{R1} and V_{F2}
12	See 4.3.1, t = 240 hours	See 4.3.1, t = 48 hours
13	Subgroups 2 and 3 of table I herein; V_{F2} and I_{R1}; $\Delta I_{R1} \leq$ 100 percent of initial value or ± 2.5 µA , whichever is greater; $\Delta V_{F2} \leq \pm$ 100 mV.	Subgroup 2 of table I herein; V_{F21} and I_{R1}; $\Delta I_{R1} \leq$ 100 percent of initial value or ± 2.5 µA , whichever is greater; $\Delta V_{F2} \leq \pm$ 100 mV.

1/ Thermal impedance shall be performed any time before screen 13.

4.3.1 Power burn-in conditions. Power burn-in conditions are as follows:

MIL-STD-750 method 1038, test condition A. T_C = +125°C; V_R = 0.8 of rated V_{RWM} (see 1.3).

4.3.2 Thermal impedance ($Z_{\theta JX}$) measurements for screening. The $Z_{\theta JX}$ measurements shall be performed in accordance with MIL-STD-750, method 3101. Test each die separately. The maximum limit (not to exceed the group A, subgroup 2 limit) and conditions for $Z_{\theta JX}$ in screening (table IV of MIL-PRF-19500) shall be derived by each vendor by means of statistical process control. When the process has exhibited control and capability, the capability data shall be used to establish the fixed screening limit. In addition to screening, once a fixed limit has been established, monitor all future sealing lots using a random five piece sample from each lot to be plotted on the applicable X, R chart. If a lot exhibits an out of control condition, the entire lot shall be removed from the line and held for Engineering evaluation and disposition.

4.3.2.1 Thermal impedance ($Z_{\theta JX}$) measurements for initial qualification or requalification. The $Z_{\theta JX}$ measurements shall be performed in accordance with MIL-STD-750, method 3101 (read and record data $Z_{\theta JX}$). Derived conditions limits and thermal response curve shall be supplied to the qualifying activity on the qualification lot prior to qualification approval. Measurement conditions shall be in accordance with 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:28Z
Check the source to verify that this is the current version before use.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500 and table I herein. Electrical measurements (end-points) and delta requirements shall be in accordance with the applicable steps of table II herein. The following test conditions shall be used for $Z_{\theta JX}$, group A inspection:

a. I_M measure current ---------- 15 mA

b. I_H forward heating current ---------- 9.9 A

c. t_H heating time ---------- 200 ms

d. t_{MD} measurement delay time ---------- 35 µs

e. V_H heating voltage ---------- 1 V

The maximum limit for $Z_{\theta JX}$ under these conditions are $Z_{\theta JX}$(max) = 2.3 °C/W

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VIa (JANS) and table VIb (JANTX and JANTXV) of MIL-PRF-19500 and as follows. Electrical measurements (end-points) and delta requirements shall be in accordance with the applicable steps of table II herein.

4.4.2.1 Group B inspection, table VIa (JANS) of MIL-PRF-19500.

Subgroup	Method	Condition
4	1037	I_F or I_O = 1.25 A to 8 A; ΔT_J = +85°C minimum, for 2,000 cycles minimum.

4.4.2.2 Group B inspection, table VIb (JANTX and JANTXV) of MIL-PRF-19500.

Subgroup	Method	Condition
3	1037	I_F or I_O = 1.25 A to 8 A; ΔT_J = +85° C minimum, for 2,000 cycles minimum.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500 and as follows. Electrical measurements (end-points) and delta requirements shall be in accordance with the applicable steps of table II herein.

4.4.3.1 Group C inspection, table VII of MIL-PRF-19500.

Subgroup	Method	Condition
2	2036	Test condition A, 5 pounds, t = 15 seconds ± 3 seconds.
6	1037	I_F or I_O = 1.25 A to 8 A; ΔT_J = +85°C minimum, for 6,000 cycles minimum.

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table III herein. Electrical measurements (end points) and delta requirements shall be in accordance with the applicable steps and footnotes of table II herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:28Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection. 1/ 2/

Inspection	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Thermal impedance 3/	3101	See 4.4.1	$Z_{\theta JX}$		2.3	° C/W
Breakdown voltage 1N6772, 1N6772R 1N6773, 1N6773R	4022	I_R = 5 µA dc, pulsed 4/	V_{BR}	 400 600		V dc
Forward voltage	4011	I_F = 4 A dc, pulsed 4/ I_F = 8 A dc, pulsed 4/	V_{F1} V_{F2}		1.45 1.60	V dc V dc
Reverse leakage current	4016	DC method; pulsed 4/ V_R = 0.8 of V_{RWM} (see 1.3)	I_{R1}		10	µA dc
Subgroup 3						
High temperature operation:		T_C = +100° C				
Reverse leakage current	4016	DC method; pulsed 4/ V_R = 0.8 of V_{RWM} (see 1.3)	I_{R2}		500	µA dc
Low-temperature operation:		T_A = -55° C				
Forward voltage	4011	I_F = 8 A dc, pulsed 4/	V_{F3}		1.80	µA dc
Subgroup 4						
Scope display evaluation 5/	4023					
Reverse recovery time measurements	4031	Condition B; I_F = 1.0 A, di/dt = 50 A/µs	t_{rr}		60	ns
Subgroups 5 and 6						
Not applicable						
Subgroup 7						
Junction capacitance	4001	V_R = 5 V dc; f = 1.0 MHz	C_J		200	pF

1/ For sampling plan, see MIL-PRF-19500.
2/ Each individual diode.
3/ If 4.4.1 test conditions are performed in 100 percent screening, this test need not be performed in Group A.
4/ Pulse test: pulse width = 300 µs, duty cycle ≤ 2 percent.
5/ The reverse breakdown characteristics shall be viewed on an oscilloscope with display calibration factors of 2 to 5 µA/division and 50 to 100 V/division. Reverse current over the knee shall be at least 20 µA. Each device may exhibit a slightly rounded characteristic and any discontinuity or dynamic instability of the trace shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:28Z
Check the source to verify that this is the current version before use.

TABLE II. Groups A, B, C, and E electrical measurements. 1/ 2/ 3/

Step	Inspection	MIL-STD-750		Symbol	Limits		Unit
		Method	Conditions		Min	Max	
1	Forward voltage	4011	I_F = 8 A dc pulsed	V_{F2}		1.60	V dc
2	Reverse leakage current	4016	V_{R} = 0.8 of V_{RWM} (see 1.3) DC method, pulsed	I_{R1}		10	µA dc
3	Forward voltage	4011	I_F = 8 A dc pulsed	ΔV_{F2}		± 100 mV dc from initial reading	
4	Reverse leakage current	4016	V_{R} = 0.8 of V_{RWM} (see 1.3) DC method, pulsed	ΔI_{R1}		100 percent of initial value or ± 2.5µA dc which-ever is greater.	
5	Thermal impedance	3101	See 4.4.1	$Z_{\theta JX}$		2.3	°C/W

1/ The electrical measurements for table VIa (JANS) of MIL-PRF-19500 are as follows:

a. Subgroup 3, see table II herein, steps 1 and 2.

b. Subgroup 4, see table II herein, steps 1, 2, 3, 4, and 5.

c. Subgroup 5, see table II herein, steps 1, 2, 3, and 4.

2/ The electrical measurements for table VIb (JANTX and JANTXV) of MIL-PRF-19500 are as follows:

a. Subgroup 2, see table II herein, steps 1 and 2.

a. Subgroup 3, see table II herein, steps 1, 2, and 5.

a. Subgroup 6, see table II herein, steps 1 and 2.

3/ The electrical measurements for table VII of MIL-PRF-19500 are as follows:

a. Subgroups 2 and 3, see table II herein, steps 1 and 2 for all levels.

a. Subgroup 6, see table II herein, steps 1, 2, and 5 for all levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:28Z
Check the source to verify that this is the current version before use.

TABLE III. Group E inspection (all quality levels) for qualification only. 1/

Inspection	MIL-STD-750		Sampling plan
	Method	Conditions	
Subgroup 1			22 devices c = 0
Thermal shock (temperature cycling)	1051	500 cycles	
Hermetic seal	1071		
Fine leak		Test condition H 5×10^{-7} atm cc/s	
Gross leak		Test condition C or K	
Electrical measurements		See table II herein, steps 1 and 2	
Subgroup 2			22 devices c = 0
Steady-state reverse bias	1038	Test condition A t = 1,000 hours, T_C = +125 ° C V_R = 0.8 of rated V_{RWM} (see 1.3)	
Electrical measurements		See table II herein, steps 1 and 2	
Subgroup 3			3 devices c = 0
Destructive physical analysis	2101		
Subgroup 4			22 devices c = 0
Thermal resistance	3101	See 4.5.2; $R_{\theta JC}$ = 2.5 ° ,C/W	
Subgroup 5			15 devices c = 0
Barometric pressure (reduced)	1001	V_R = rated V_{RWM} (see 1.3)	

1/ For initial design and process change verification only (one time testing).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:28Z
Check the source to verify that this is the current version before use.

4.5.2 Thermal resistance. Thermal resistance measurements shall be performed in accordance with method 3101 of MIL-STD-750. The maximum limits for $R_{\theta jc}$(max) shall be 2.5°C/W for devices in the TO-257AA case style. Each diode leg shall be measured. The following parameter measurements shall apply:

a. I_M measure current ---------- 15 mA

b. I_H forward heating current ---------- 9.9 A

c. t_H heating time ---------- Steady state (see MIL-STD-750, method 3101)

d. t_{MD} measurement delay time ---------- 35 µs

e. V_H heating voltage ---------- 1 V

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging must be in accordance with MIL-PRF-19500.

5.2 Marking. Unless otherwise specified (see 6.2), marking shall be in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Lead finish (see 3.3.1).

b. Type designation and product assurance level.

c. Packaging requirements (see 5.1).

6.3 Cross reference list. Parts covered by this specification may be used to replace the following commercial Part of Identifying Numbers (PIN):

Preferred types	Commercial types
JAN1N6772, JAN1N6772R; JANTX1N6772, JANTX1N6772R; JANTXV1N6772, JANTXV1N6772R; JANS1N6772, JANS1N6772R	1N6772, 1N6772R
JAN1N6773, JAN1N6773R; JANTX1N6773, JANTX1N6773R; JANTXV1N6773, JANTXV1N6773R; JANS1N6773, JANS1N6773R	1N6773, 1N6773R

6.4 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Products List QPL-19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, DSCC-VQE, Columbus, OH 43216.

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:28Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 17
NASA - NA
DLA - CC

Preparing activity:
DLA - CC

(Project 5961-1988)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:28Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-19500/645A	**2. DOCUMENT DATE** 16 August 1998

3. DOCUMENT TITLE
SEMICONDUCTOR DEVICE, DIODE, SILICON, POWER RECTIFIER, DUAL, COMMON CATHODE OR ANODE, CENTER TAP,ULTRAFAST, TYPES 1N6772, 1N6773, 1N6772R, AND 1N6773R, JAN, JANTX, JANTXV, AND JANS

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER Please Print Legibly

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) Commercial DSN FAX EMAIL	7. DATE SUBMITTED

8. PREPARING ACTIVITY

a. Point of Contact Alan Barone	b. TELEPHONE Commercial 614-692-0510 DSN 850-0510 FAX 614-692-6939 EMAIL alan_barone@dscc.dla.mil
c. ADDRESS Defense Supply Center Columbus ATTN: DSCC-VAT Columbus, OH 43216-5000	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 DSN 289-2340

DD Form 1426, OCT 89 Previous editions are obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:28Z
Check the source to verify that this is the current version before use.