Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing).
ARMY: MSC GL+ WC+ EL+ NAVY: MC@ YD+ AIR FORCE _(+

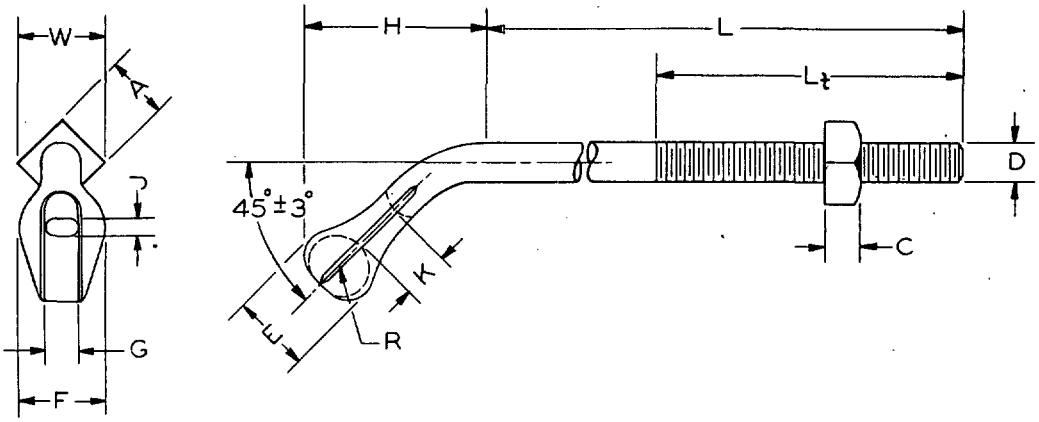

DASH NO	DIMENSIONS												
	D	L	L_t	A	W	C	E	F	G	H	J	K	R
-1	5/8-11	8	4-MIN	1	1 - 7/16	35/64	1 1/2	1 11/16	9/16	3	11/16	11/16	11/16
-2	5/8-11	10	4-MIN	1	1 - 7/16	35/64	1 1/2	1 11/16	9/16	3	11/16	11/16	11/16
-3	5/8-11	12	6-MIN	1	1 - 7/16	35/64	1 1/2	1 11/16	9/16	3	11/16	11/16	11/16
-4	5/8-11	14	6-MIN	1	1 - 7/16	35/64	1 1/2	1 11/16	9/16	3	11/16	11/16	11/16
-5	3/4-10	10	4-MIN	1 1/8	1-19/32	21/32	1 5/8	1 7/8	11/16	3 1/2	13/16	13/16	3/4
-6	3/4-10	14	6-MIN	1 1/8	1-19/32	21/32	1 5/8	1 7/8	11/16	3 1/2	13/16	13/16	3/4

5/8 inch diameter bolts shall develop a minimum tensile strength of 12,500 pounds.

3/4 inch diameter bolts shall develop a minimum tensile strength of 18,500 pounds.

NOTES:

1. REFERENCE DOCUMENTS - ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BID APPLY.
2. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
(A1) 3. MATERIALS, FINISH AND SCREW THREADS SHALL BE IN ACCORDANCE WITH EDISON ELECTRIC INSTITUTE SPECIFICATION TD-4.

APPROVED 9 NOV 56 REVISED (A) 10 August 1967

ALL DIMENSIONS IN INCHES

P.A. EL Other Cust YD 69	TITLE BOLT, THIMBLE EYE (BENT) HOT GALVANIZED (POLE-LINE)	MILITARY STANDARD MS 35797
PROCUREMENT SPECIFICATION MIL-H-55053	SUPERSEDES:	

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

*U.S. GOVERNMENT PRINTING OFFICE: 1967-301-512/1706

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:28Z
Check the source to verify that this is the current version before use.