FED. SUP CLASS
6640

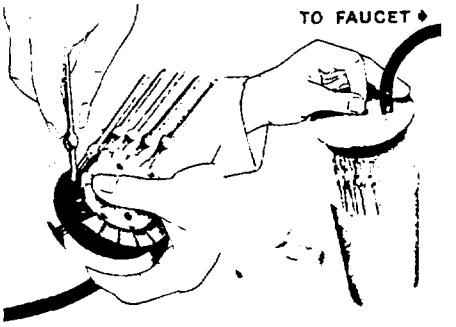

MATERIAL: Washer shall be made of rubber and aluminum.

DESIGN: Pipets shall be held in rubber sockets and suspended from an aluminum cap supported on the rim of a jar containing detergent or rinse. The washer shall have flap valves which are lifted to insert the pipets; unused holes are automatically closed off so the liquid will only pass through the pipets. Liquid shall be drawn through pipets by an aspirator pump connected to suction nipple with 7 mm tubing.

The pipets to be washed shall reach a diameter 5 to 7 mm within 19 mm from upper end. Pipets up to 210 mm long can be washed.

NOTES:
1. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.
2. FSCM: 59728.

APPROVED 8 NOV 83 REVISED

USER ACTIVITIES: ARMY - DM, MD
NAVY - MS

REVIEWER ACTIVITIES: ARMY - ME
AIR FORCE - 82

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		WASHER, PIPET, AUTOMATIC, ADAMS TYPE	MS36591
Procurement Specifications NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PROJECT NUMBER 6640-0779

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:44Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:44Z
Check the source to verify that this is the current version before use.