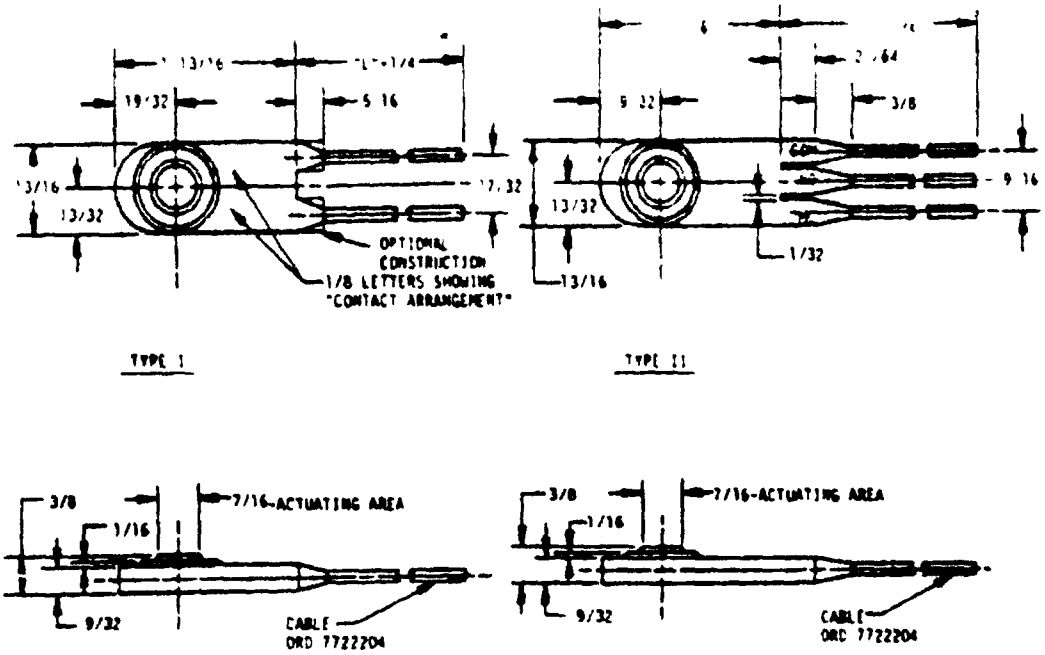

MS PART NO	FORMER PART NO	SWITCH TYPE	CONTACT ARRANGEMENT	"L" DIM
MS39058-1	ORD 7974220	1 SP/ST	NORMALLY OPEN	31
MS39058-2	ORD 7974221	1 SP/ST	NORMALLY CLOSED	12 3 16
MS39058-3	ORD 7974222	1 SP/ST	NORMALLY OPEN/ NORMALLY CLOSED	12-3/16

REQUIREMENTS

(B) 1 SWITCH TYPE SHALL BE AS SPECIFIED IN TABULATION

2 SWITCH CASING MATERIAL RUBBER SC 410 AC, E_3 F_7 IN ACCORDANCE WITH MIL-R-3065

3 ACTUATION FORCE 1 TO 2 POUNDS WITHIN 1/8 INCH OF CENTER OF ACTUATION AREA

RELEASE FORCE	6 OUNCES MINIMUM
RELEASE TIME	1/4 SECOND MAXIMUM
PRETRAVEL	015 MINIMUM
OVERTRAVEL	015 MINIMUM
MOVEMENT DIFFERENTIAL	005 MAXIMUM
CURRENT RATING	7-1/2 AMPERES LAMP LOAD, 7-1/2 AMPERES INDUCTIVE LOAD (L/R RATIO .026), 15 AMPERES RESISTIVE LOAD

NOTES

1 DIMENSIONS ARE IN INCHES TOLERANCE IS ± 1/32 FOR FRACTIONS

(B) 2 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

(B) 3 REFERENCED GOVERNMENT DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

(B) DENOTES CHANGE

P A ARMY AT
Orden Corr

INTERNATIONAL INTEREST

TITLE

SWITCH, SENSITIVE - 24 VOLT DC (WATERPROOF)

MILITARY STANDARD

MS39058(AT)

PROCUREMENT SPECIFICATION
M S 13484

SUPERSEDES

SHEET 06

DD FORM 672-1 COORDINATED

5930 A632

USER ACTIVITIES

REVIEWER ACTIVITIES ARMY MI
DLA ES

This military standard is approved for use by the US Army Tank-Automotive Command (Department of the Army), and is available for use by all Departments and Agencies of the Department of Defense
AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

APPROVED 9 SEPT 1958 REVISED (A) 12 JUNE 1967 (B) 16 FEBRUARY 1988

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:45Z
Check the source to verify that this is the current version before use.