FED. SUP CLASS
4730

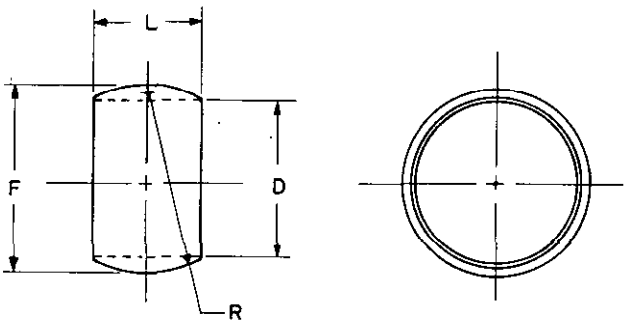

DASH NUMBER	TUBE O.D.	D DIA		F DIA		L	R RADIUS	
		MIN	MAX	MAX	MIN	±0.005	MAX	MIN
1	1/4	0.253	0.257	0.324	0.320	0.250	0.316	0.312
2	5/16	0.316	0.320	0.390	0.386	0.281	0.362	0.358
3	3/8	0.380	0.384	0.463	0.459	0.313	0.408	0.404
4	1/2	0.505	0.509	0.596	0.592	0.375	0.502	0.498
5	5/8	0.630	0.634	0.736	0.732	0.438	0.597	0.593
6	3/4	0.756	0.760	0.876	0.872	0.500	0.690	0.686
7	1	1.006	1.010	1.154	1.150	0.626	0.877	0.873

NOTES:

1. MATERIAL: Brass, in accordance with procurement specification.
2. PROTECTIVE COATING: None.
3. DIMENSIONS AND TOLERANCES: Dimensions and tolerances not shown shall be in accordance with the SAE Standard for Spherical Sleeve (Compression) Tube Fittings (SAE J246).
4. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS39197-1.
5. Referenced documents shall be of the issue in effect on date of invitations for bid.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. The illustration is for identification and is not intended to restrict designs or shapes not dimensioned.

©CANCELLED–For Procurement USE SAE J246

REVIEWER: CS, AT, ER, GL, MC, ME, MI
USER:

APPROVED 3 APR 62 REVISED (A) 27 FEB 67 (B) 22 MAY 73 (C) 24 OCT 86

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. AR Other Cust	TITLE SLEEVE,COMPRESSION, TUBE FITTING, FOR AIR LINES-SPHERICAL SLEEVE	MILITARY STANDARD MS39197
PROCUREMENT SPECIFICATION MIL-F-45911(WC)	SUPERSEDES: CFHX1 in part	SHEET 1 OF 1

DD FORM SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 4730-0842

AMSC/NA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.