FED. SUP CLASS
4720

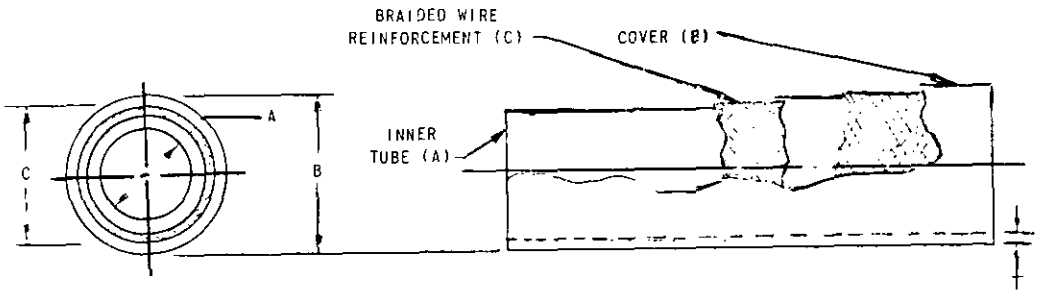

HOSE END VIEW

NOMINAL HOSE SIZE I.D.	DASH NO.	A INNER TUBE		B COVER		B COVER ALTERNATE		C WIRE REINFORCEMENT		T ALTERNATE COVER THICKNESS RANGE		MAXIMUM WORKING PRESSURE
		INSIDE DIAMETER	I.D. TOLERANCE	OUTSIDE DIAMETER	O.D. TOLERANCE	OUTSIDE DIAMETER	O.D. TOLERANCE	OUTSIDE DIAMETER	O.D. TOLERANCE	MAX	MIN	
1/4	-4	0.250	+0.023 -0.008	0.625	±0.031	0.527	±.019	0.438	±0.023	0.060	0.031	2,750
3/8	-6	0.375	+0.023 -0.008	0.781	±0.031	0.684	±.019	0.594	±0.023	0.060	0.031	2,250
1/2	-8	0.500	+0.031 -0.015	0.906	±0.031	0.805	±.02	0.719	±0.031	0.060	0.031	2,000
3/4	-12	0.750	+0.031 -0.015	1.187	±0.031	1.080		00	±0.031	0.060	0.031	1,250
1	-16	1.000	+0.040 -0.015	1.500	±0.046	1.433		.313	±0.031	0.085	0.042	1,000
1-1/4	-20	1.250	+0.047 -0.015	1.812	±0.062	1		1.594	±0.047	0.100	0.050	625
1-1/2	-24	1.500	+0.047 -0.015	2.062	±0.062			.47	1.844	±0.047	0.100	0.050	500
2	-32	2.000	+0.047 -0.015	2.625	±0.0			±.027	2.375	±0.047	0.100	0.050	375

(A)

(R) CANCELLED AFTER 25 OCTOBER 1978 for future procurement use MIL-H-52471/4

NOMINAL HOSE	CONCENTRICITY BETWEEN (A) AND O.D. (B)	BORE (A) AND REINFORCEMENT O.D. (C)
1/4, 3/8, 1/2, 3/4	.040 TIR	0.030 TIR
1, 1 1/4, 1 1/2, 2	0.050 TIR	0.040 TIR

NOTES:

1. PRESSURES IN POUNDS PER SQUARE INCH (PSI).
2. DIMENSIONS IN INCHES.
3. INSIDE AND OUTSIDE DIAMETERS ARE MEASURED AT LEAST 2 INCHES FROM END.
4. (A) THIS HOSE CONFORMS TO MIL-H-52471, TYPE A.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. PART NO. EXAMPLE: MS39262-4A INDICATES 1/4-INCH NOMINAL SIZE SINGLE WIRE BRAID HOSE.

REVIEW ACTIVITIES: AC
USER ACTIVITIES: N., MC, 8.

APPROVED 12 NOV 1965 REVISED (A) 28 DECEMBER 1970 (B) 25 October 1978

MILITARY STANDARD

MS 39262

SHEET 1 OF 1

P.A. ARMY-ME
Other Cust

TITLE: HOSE, RUBBER: HYDRAULIC PRESSURE TYPE, SINGLE WIRE BRAID REINFORCEMENT

PROCUREMENT SPECIFICATION: MIL-H-52471

SUPERSEDES

DD FORM 1 SEP 67 672-1 (Continuation)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE: 1978—603-022/5296

Source: https://assist.dla.mil -- Downloaded: 20260-23117.502
Check the source to verify that this is the current version before use.