REVIEW ACTIVITIES YD, MC, 82, DCSC
USER ACTIVITIES MD, EL

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

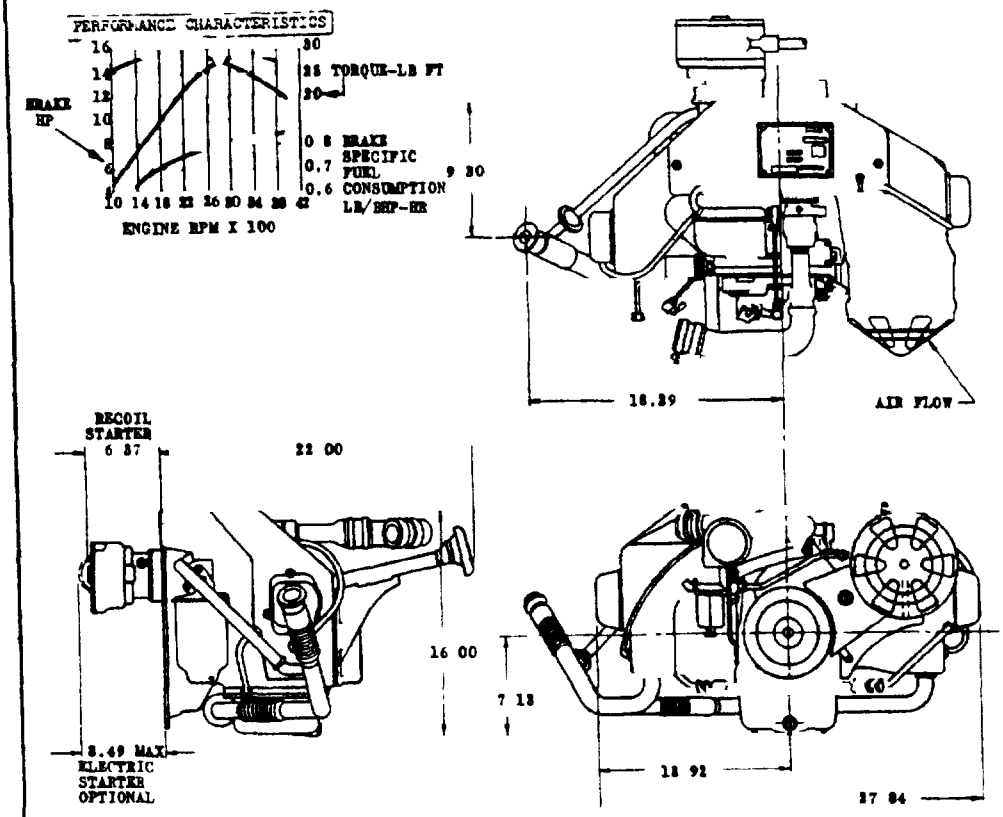

ENGINE CHARACTERISTICS

MODEL A042 FSN 2805-017-8680
TYPE 4 CYCLE, HORIZ. OPP., OVERHEAD VALVE, AIR-COOLED, GASOLINE

NUMBER OF CYLINDERS	2	
BORE X STROKE (IN.)	3 X 3	
DISPLACEMENT (CU.IN.)	42	
MIN. HP (AFTER BREAK-IN) W.O.T.		16.7 AT 3600 RPM
MIN. HP (AS SHIPPED) W.O.T.		15 AT 3600 RPM
MIN. HP (AS SHIPPED) W.O.T.		12 5 AT 3000 RPM
OPERATING SPEED RANGE		950-4000 RPM

ACCESSORIES FURNISHED WITH ENGINE
GOVERNOR, FUEL PUMP, FUEL FILTER, RECOIL STARTER, MANUAL THROTTLE CONTROL, AUTOMATIC CHOKE, MOUNTING BRACKETS & CLUTCH PLATE-FLYWHEEL ASSEMBLY.
PURCHASE DESCRIPTION DAPD - 298
TECHNICAL MANUAL LUBRICATION MANUAL

ACCESSORIES NOT FURNISHED WITH ENGINE MUFFLER, AIR CLEANER
DRY WEIGHT (LBS) — 155

NOTES
1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
3. ALL DIMENSIONS ARE IN INCHES.
4. UNLESS OTHERWISE SPECIFIED: TOLERANCE SHALL BE ±1/64.

P.A. Army - ME
Other Cust Navy - YD
Air Force - 82

PROCUREMENT SPECIFICATION
DAPD - 298

TITLE
ENGINE, GASOLINE 2 CYLINDER, HORIZONTAL OPPOSED AIR COOLED, 14 HP

SUPERSEDES

MILITARY STANDARD
MS 39301
SHEET 1 OF 1

APPROVED 13 JULY 1966 REVISED

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITION OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.