FED. SUP CLASS
4730

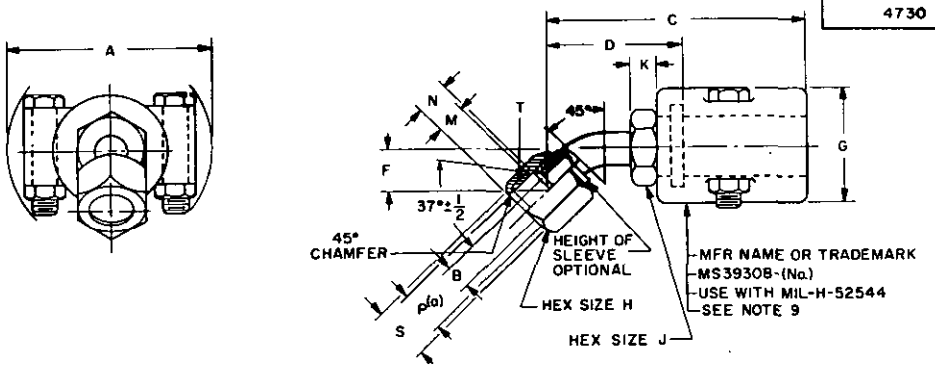

(a) DIMENSION P TO BE CONCENTRIC WITH DIMENSION B WITHIN 0.005 FULL INDICATOR READING.
S DIMENSION IS THE EDGE OF THE CHAMFER.
P DIMENSION IS THE EDGE OF THE 37 DEGREE FLARE.
M DIMENSION IS THE MIN. THREAD LENGTH.
N DIMENSION IS THE LENGTH FROM THE EDGE OF THE 37° FLARE TO THE END OF THE NUT.

DIMENSIONS FOR 3/4-INCH COUPLINGS

DASH NO.	HOSE I.D. (REF)	T NOM THREAD SIZE	A MAX	B MIN	C MAX	D MAX	F MAX	G MAX	H HEX	J HEX
-12	.750	1-1/16-12	3.000	.600	4.525	3.063	1.062		1.25	.875

DASH NO.	K MIN.	M MIN.	N ±.031	P ±.005	S MIN	MAX WORK P	...NING ...ORQUE
-12	.38	.469	.562	.850	1.08		...000 IN. LBS

CANCELLED
NO SUPERSEDING
After 25 October 1972
STANDARD

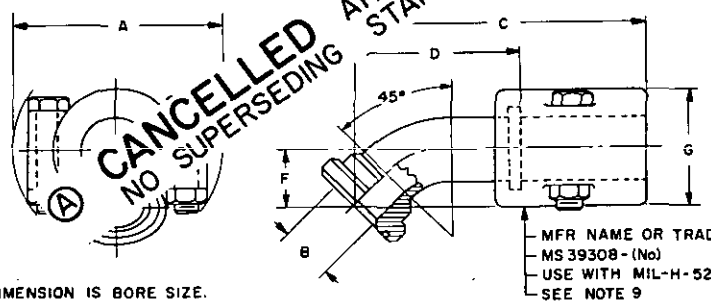

B DIMENSION IS BORE SIZE.

DIMENSIONS FOR 1-INCH THROUGH 4-INCH COUPLINGS

DASH NO.	HOSE I.D. (REF)	A MAX	B MIN	C MAX	D MAX	F MAX	G MAX	MAX WORKING PRESS.
-16	1.00	4.000	.810	5.13	3.09	1.19	2.060	250
-20	1.25	4.625	1.040	5.94	3.50	1.25	2.630	200
-24	1.50	5.000	1.250	7.44	3.94	1.50	2.940	150
-32	2.00	5.250	1.730	8.13	5.34	2.09	3.500	100
-40	2.50	5.500	2.188	7.03	4.63	1.78	3.563	62
-48	3.00	6.188	2.750	8.06	5.41	2.10	4.063	55
-56	3.50	6.375	3.250	9.12	6.44	2.46	4.500	50
-64	4.00	7.375	3.750	9.84	7.04	2.81	5.250	50

APPROVED 4 May 1967 REVISED (A) 25 OCTOBER 1972

Review activity: MC
User activity: AT

This military standard is approved by Naval Ship Systems Command, Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. ME Other Cust	TITLE COUPLING, HOSE: REUSABLE, HYDRAULIC, OIL SUCTION, 2-BOLT CLAMP-ON, 45° BENT TUBE	MILITARY STANDARD MS39308 (ME)
PROCUREMENT SPECIFICATION MIL-C-52545	SUPERSEDES	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:51Z
Check the source to verify that this is the current version before use.