FED. SUP CLASS
2530

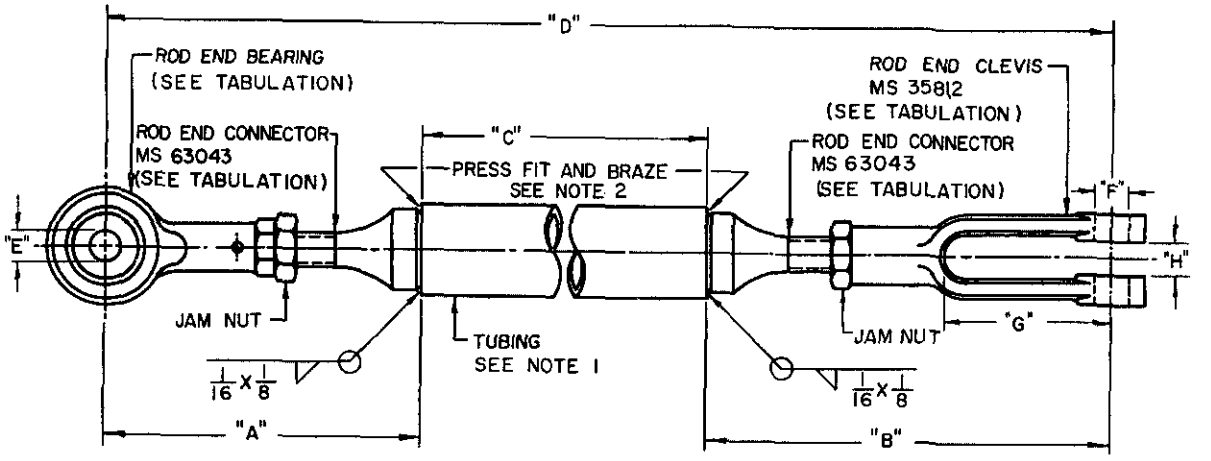

SIZE NO.	ROD END BEARING PART NO.	ROD END CONNECTOR 2 REQUIRED	ROD END CLEVIS	JAM NUT 2 REQUIRED	THREAD SIZE UNF-2	LENGTH A ± 1/4	LENGTH B ± 1/4	DIA. E&F	DIM. G	DIM. H
1	7388852	MS 63043-1	MS 35812-3	MS 35691-13	5/16-24	2-3/4	3-1/2	5/16	1-7/16	11/32
2	8376284	MS 63043-2	MS 35812-4	MS 35691-21	3/8-24	2-7/8	3-3/4	3/8	1-5/8	7/16
3	8376445	MS 63043-3	MS 35812-6	MS 35691-37	1/2-20	3-1/4	4-1/8	1/2	3-1/16	9/16
4	8395793	MS 63043-4	MS 35812-7	MS 35691-53	5/8-18	3-1/2	6	5/8	3-11/16	11/16

THIS IS A DESIGN STANDARD

© CANCELLED AFTER 21 OCTOBER 1982.
NO SUPERSEDING STANDARD.

NOTES:

1. MATERIAL: TUBING, STEEL, CARBON, MT1010 TO MTX1020, ELECTRIC RESISTANCE WELDED, SPEC. QQ-T-830, 3/4 OD X 18 GAGE (0.049) WALL.
2. BRAZING SHALL BE IN ACCORDANCE WITH MIL-B-12672. BRAZING ROD SHALL CONFORM TO QQ-R-571, CLASS FS-RCUZN-1.
3. DIMENSION "D" SHALL BE AS SPECIFIED BY THE PROCUREMENT ACTIVITY.
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
5. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REVIEW ACTIVITIES:
USER ACTIVITIES:

APPROVED 18 APRIL 1960 REVISED (A) 7 OCTOBER 1966 (B) 17 JULY 1972 (C) 21 OCT 82

This military standard is approved by the U. S. Army Tank-Automotive Command, Department of the Army, and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. ARMY-AT Other Cust	TITLE CONNECTING LINK, RIGID: STRAIGHT	MILITARY STANDARD MS 51328 (AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 2530-N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:59Z
Check the source to verify that this is the current version before use.