FED SUP CLASS
5940

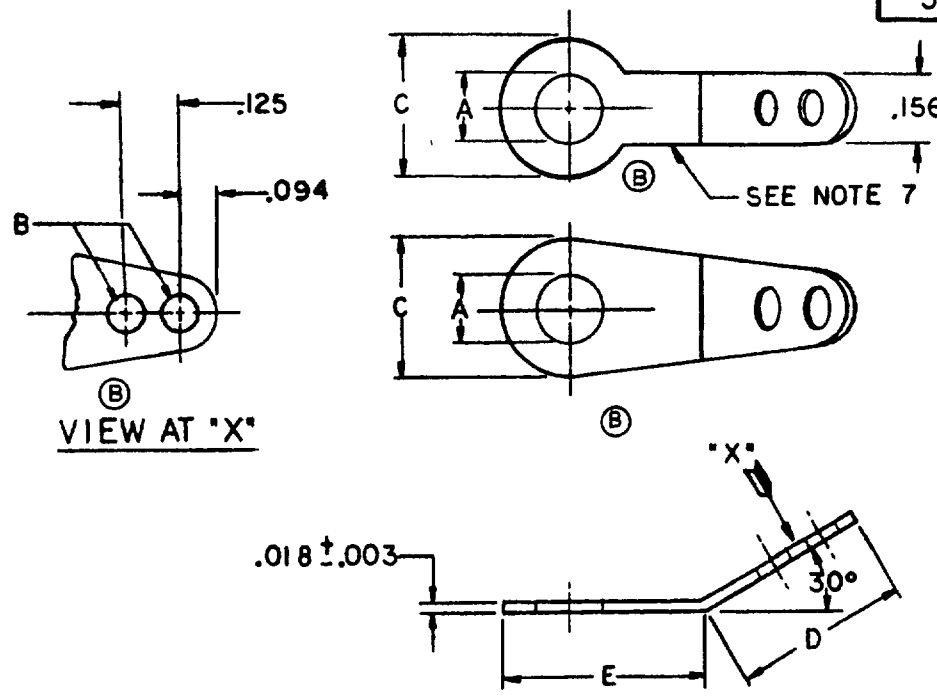

DASH NO	WIRE SIZE AWG NOM	STUD SIZE	A HOLE DIA MIN	A HOLE DIA MAX	B DIA	C DIA	D	E	
1	12	2	.090	.096	.094	.312	.331	.406	Ⓑ
2		4	.115	.127					
3		6	.141	.153					
4		8	.167	.179					
5		10	.193	.205					
6		.250	.253	.257		.375	.343	.469	Ⓑ

Ⓑ

MATERIAL Copper, annealed - specification QQ-C-576.

FINISH. Hot tin dip or electrodeposited tin all over, minimum thickness 0005 inches.

NOTES:

1 Dimensions are in inches.
2 Unless otherwise specified, tolerance is ± 015.
3 Remove all burrs.
4 The MS part number consists of the MS number plus the dash number
5 In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence
6 Referenced Government (or nongovernment) documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein
Ⓑ 7 Dash No 6 shall conform to this design

Ⓑ DENOTES CHANGES

APPROVED 6 FEB 1985 REVISED Ⓐ 5 SEPT 1985 Ⓑ 19 AUG 1986

P.A. AR Other Cost 85	INTERNATIONAL INTEREST	TITLE TERMINAL, LUG, SOLDER TYPE, COPPER STAMPING, TWO HOLE, 30°	MILITARY STANDARD MS 51535
PROCUREMENT SPECIFICATION MIL-T-15659	SUPERSEDES:		PAGE 1 OF 1

AMSC N/A DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5940

USER ACTIVITIES: NAVY - AS, MC AIR FORCE - 11

REVIEWER ACTIVITIES: ARMY - MI, AV AIR FORCE - 99 DSC - GS

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new equipment and design applications and for repetitive use shall be made from this document, when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:06Z
Check the source to verify that this is the current version before use.