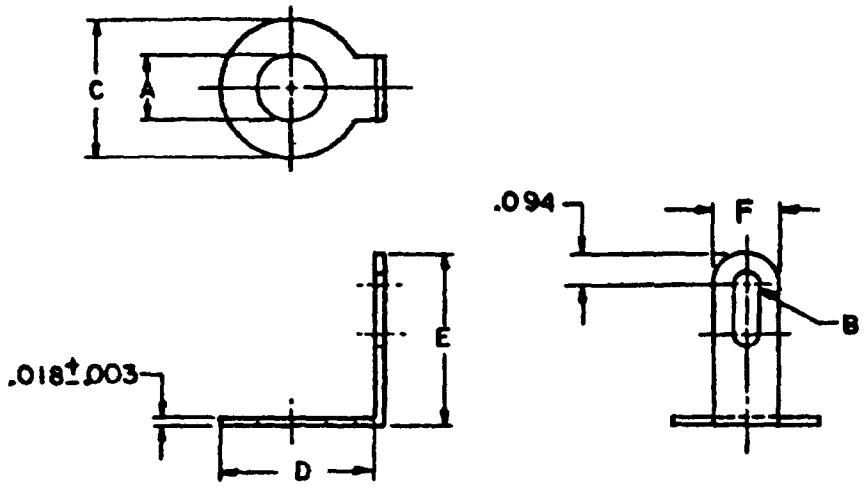

DASH NO	WIRE SIZE AWG NOM	STUD SIZE	A HOLE Ø MIN	A HOLE Ø MAX	B SLOT	C Ø	D	E	F
1	12	2	.090	.096	.093 X.125	.312	.234	.468	.187
2					.093 X.171	.250	.281	.547	.156
3		4	.115	.127	.093 X.125	.312	.234	.468	.187
4					.093 X.171	.250	.281	.547	.156
5		6	.141	.153	.093 X.125	.312	.234	.468	.187
6					.093 X.171	.250	.281	.547	.156
7		8	.167	.179	.093 X.125	.312	.234	.468	.187
8					.093 X.171	.250	.281	.547	.156

MATERIAL: Copper, annealed - specification QQ-C-576.

FINISH: Hot tin dip or electroplated tin all over, minimum thickness .0005 inches.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± .015.
3. Remove all burrs.
4. The MS part number consists of the MS number plus the dash number.
5. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
6. Referenced Government (or nongovernment) documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.

APPROVED 28 JUNE 1985 REVISED

P. A. AR
Other Govt 85

INTERNATIONAL INTEREST

TITLE TERMINAL, LUG, SOLDER TYPE, COPPER STAMPING, SLOTTED, 90°

MILITARY STANDARD

MS 51560

PROCUREMENT SPECIFICATION MIL-T-15659

SUPERSEDING

PAGE 1 OF 1

AMSC N/A DD FORM 672-1 COORDINATED

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:07Z
Check the source to verify that this is the current version before use.