FED. SUP CLASS
6650

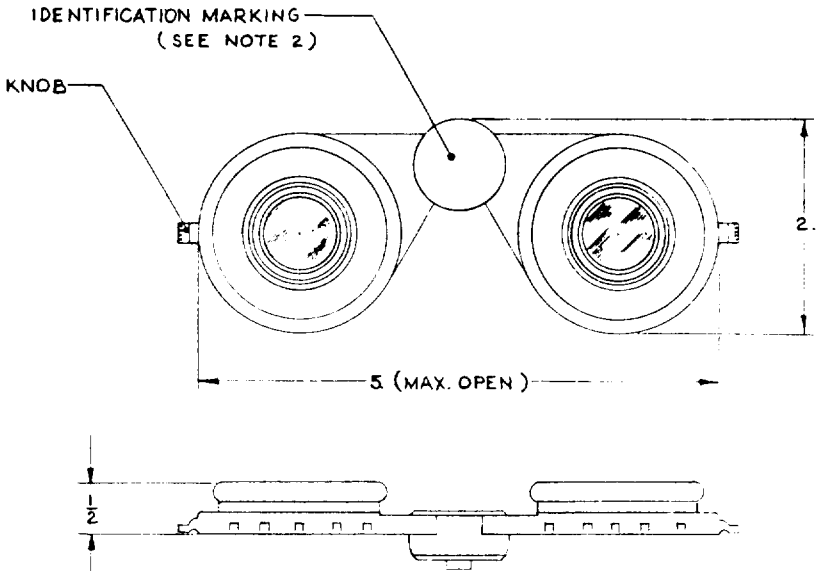

MS DASH NO.
-1

APPLICATION

To control or moderate the intensity of sunlight by rotation of the polarizing discs.

DESIGN CHARACTERISTICS

1. Designed to spring fit over binocular eyeguards 1-3/8 inch diameter.
2. Variable density - The intensity of light transmitted may be adjusted by rotation of either knob.
3. Interpupillary distance is adjustable between 55 MM and 75 MM.

NOTES:

1. Dimensions in inches. Dimensions given are an approximation and for reference only.
2. Identification marking shall be applied in accordance with requirements of the procurement specification.
3. The MS part number consists of the MS number plus the dash number. Example MS 51600-1.
4. Referenced documents shall be of the issue in effect on date of invitations for bid.
5. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

APPROVED [illegible] REVISED (A) 31 March 1967

User Activities:
Navy - MC

Code "C"

Review Activities:
Army - MU
Navy - SH
Air Force - 82

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MU Other Cust SH 82	TITLE FILTER, LIGHT, OPTICAL INSTRUMENT (VARIABLE DENSITY - BINOCULAR TYPE)	MILITARY STANDARD MS 51600
PROCUREMENT SPECIFICATION MIL-F-2763	SUPERSEDES:	SHEET 1 OF 1

DD 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.