FED. SUP CLASS
1240

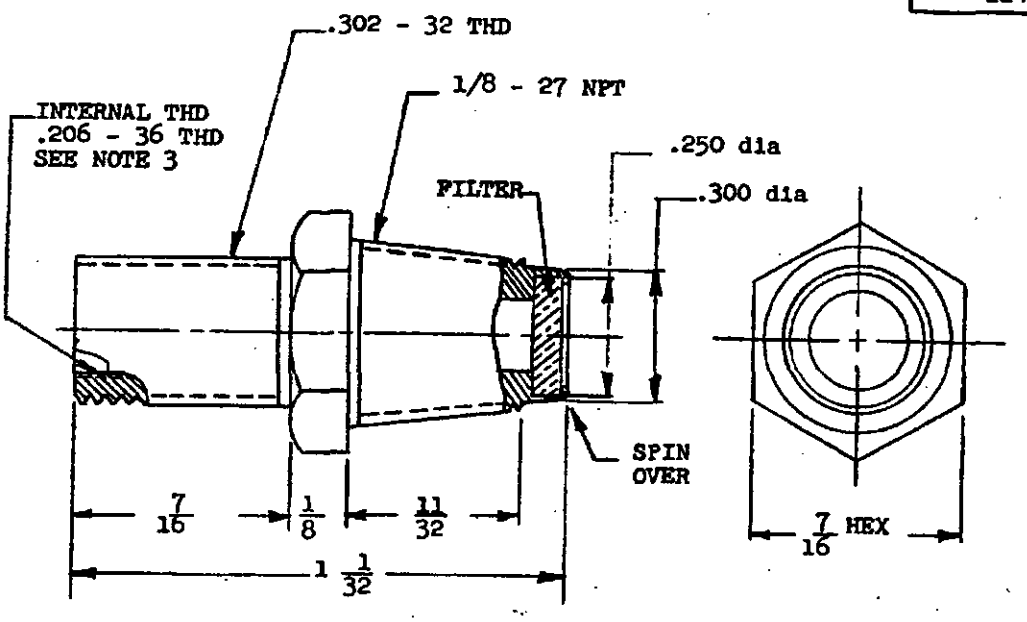

MATERIAL: VALVE STEM: CORROSION RESISTING STEEL, 300 SERIES AISI FEDERAL STANDARD NO. 66. PASSIVATED SPECIFICATION QQ-P-35
FILTER: BRONZE MESH, .240 DIA 1/16" THICK HAVING A STOPPAGE SIZE FROM 40 TO 50 MICRONS

DIMENSIONS: ALL DIMENSIONS ARE IN INCHES

TOLERANCE: FRACTIONS ± 1/64 DECIMALS ± .005.
MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER.

NOTES:
1. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENT REFERENCED HEREIN
2. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID
3. VALVE STEM TO ACCOMMODATE SHORT VALVE CORE, MS51377-2

REVIEW ACTIVITIES: ARMY - MU, AT

APPROVED 15 April 1966 REVISED A 29 Sept. 1967

MS PART NO.
MS 51607-1

P.A. MU (FA) Other Cust	TITLE: VALVE STEM, PURGING (WITH FILTER)	MILITARY STANDARD MS 51607 (MU)
Procurement Specification NONE	SUPERSEDES: MUCOM DWG. B8	SHEET 1 OF 1

This has been approved by the Munitions Command Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

(Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

*U.S. GOVERNMENT PRINTING OFFICE: 1967-301-512/1988

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.