MIL-L-3661/24B
17 February 1972
SUPERSEDING
MIL-L-3661/24A
27 March 1967

MILITARY SPECIFICATION SHEET

LENSES, INDICATOR-LIGHT, STYLE LC24, CONVEX, SEMI-BLACKOUT, DRIPPROOF, MECHANICAL DIMMER

The complete requirements for procuring the lenses described herein shall consist of this document and the latest issue of Specification MIL-L-3661.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

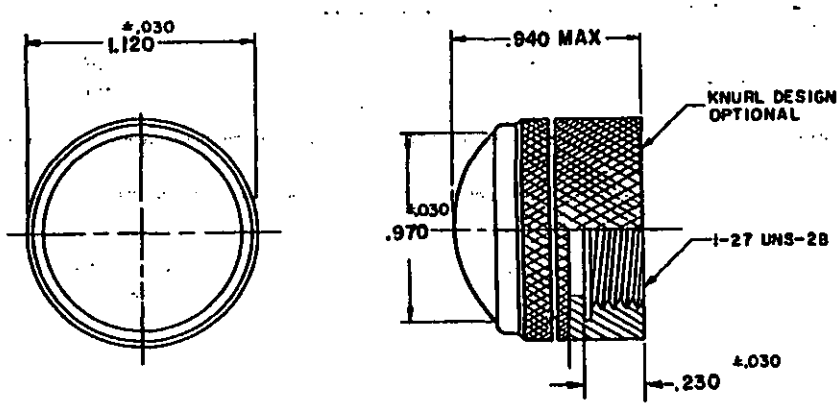

INCHES	MM
.030	.76
.230	5.84
.940	23.88
.970	24.64
1.120	28.45

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Ⓑ denotes changes.

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 20260-16T20:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Design and construction: See figure.

(B) 2. Temperature cycling: -55°C to +125°C.

3. Sealing: Dripproof.

(B) as

Type designation	Mating holder	Lens material	Transmittance	Lens color
LC24RN3	LH79, LH80	Plastic	Nondiffusing	Red
LC24GN3	LH79, LH80	Plastic	Nondiffusing	Green
LC24YN3	LH79, LH80	Plastic	Nondiffusing	Yellow
LC24BN3	LH79, LH80	Plastic	Nondiffusing	Blue
LC24CN3	LH79, LH80	Plastic	Nondiffusing	Colorless
LC24RD3	LH79, LH80	Plastic	Diffusing	Red
LC24GD3	LH79, LH80	Plastic	Diffusing	Green
LC24YD3	LH79, LH80	Plastic	Diffusing	Yellow
LC24BD3	LH79, LH80	Plastic	Diffusing	Blue
LC24CD3	LH79, LH80	Plastic	Diffusing	Colorless

(B) NOTE: Glass lenses, previously identified by symbol 1, are inactive for new design. Symbol 3 lenses with equivalent colors and transmittance shall be used as replacements.

Custodians:
Army - EL
Navy - EC
Air Force - 82

Review activities:
Army - MI, MU
Navy - AS
Air Force -
DSA - GS

User activities:
Army - AT,
Navy - MC, SH, OS
Air Force -

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 6210-0434)

Source: https://assist.dla.mil -- Downloaded: 202640-16T20:56Z
Check the source to verify that this is the current version before use.