INCH-POUND


MIL-DTL-3661/25B
15 October 2024
SUPERSEDING
MIL-L-3661/25A
9 June 1969

DETAIL SPECIFICATION SHEET

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS, AND INDICATOR-LIGHT LENSES (FLAT) (ELECTROMAGNETIC INTERFERENCE TYPE) DUSTTIGHT LENS, STYLE LC25

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3661

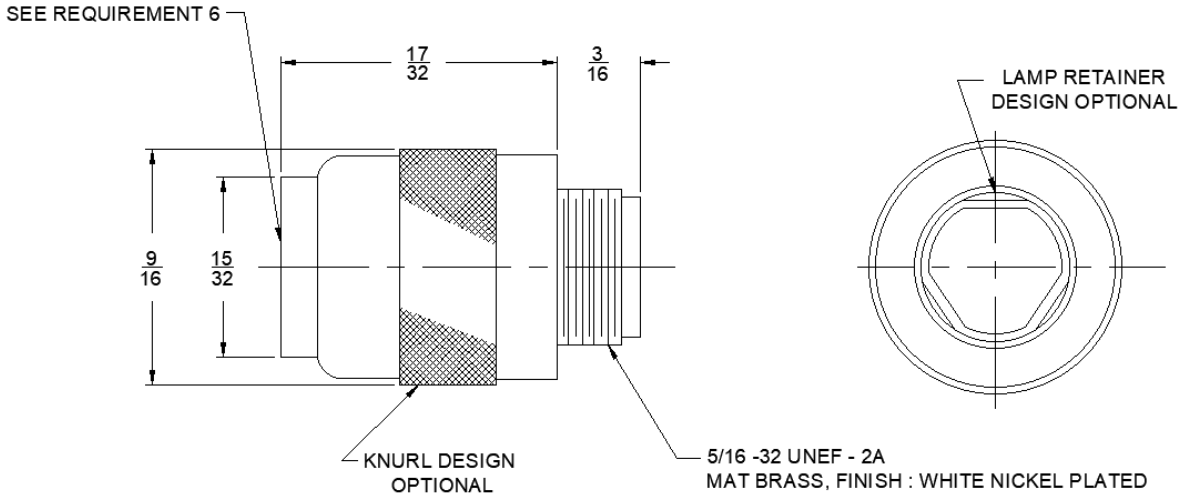

inches	mm
3/16	4.76
5/16	7.94
15/32	11.91
17/32	13.49
9/16	14.29

FIGURE 1. Design and Construction

AMSC N/A
FSC 6210

DISTRIBUTION STATEMENT A: Approved for public release; Distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:57Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerances are ±1/32 inch for fractions.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Legend orientation can be accomplished by pressing on face of lens and rotating in either direction.

REQUIREMENTS:

1. Design and construction: See figure 1.
2. The lens design shall contain an integral metal mesh.
3. The lens shall accommodate one T – 1 - 3/4 midget flange base incandescent lamp.
4. Temperature cycling: -55°C to +71°C.
5. Sand and Dust: (Dusttight)
6. Numbers and letters may be hot stamped on lens face in accordance with the “Ordering Data” paragraph of MIL-DTL-3661. Legend information:
    a. Size of type for legends:

Number of characters	Character height nearest fraction (inch)	Type size (Points)
One	13/64	18
Two	11/64	14
Three	9/64	12
Four	5/64	8

    b. Maximum amount of digits: Two lines, 4 digits per line, 8 point type size.

    c. Hot stamping standard: Black letters, white, red, green, blue, or silver can be supplied on request.

TABLE I. Designations and characteristics

Type designation	Mating holder	Lens material	Transmittance	Lens color
LC25RN2	LH73/2[1]	Plastic	Non-diffusing	Red
LC25GN2	LH73/2	Plastic	Non-diffusing	Green
LC25YN2	LH73/2	Plastic	Non-diffusing	Yellow
LC25BN2	LH73/2	Plastic	Non-diffusing	Blue
LC25CN2	LH73/2	Plastic	Non-diffusing	Colorless
LC25RT2	LH73/2	Plastic	Translucent	Red
LC25GT2	LH73/2	Plastic	Translucent	Green
LC25YT2	LH73/2	Plastic	Translucent	Yellow
LC25BT2	LH73/2	Plastic	Translucent	Blue
LC25WT2	LH73/2	Plastic	Translucent	White

[1] From MIL-DTL-3661/5

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:57Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-3661, this document references the following:
MIL-DTL-3661/5

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army – CR
Navy – AS
DLA – GS2

Preparing Activity:
DLA – CC
(Project 6210-2024-031)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:57Z
Check the source to verify that this is the current version before use.