MIL-L-3661/26A
9 June 1969
SUPERSEDING
MIL-L-3661/26
27 March 1967


MILITARY SPECIFICATION SHEET

Ⓐ

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS, AND INDICATOR-LIGHT LENSES, (ELECTROMAGNETIC INTERFERENCE TYPE) DUSTTIGHT LENS, STYLE LC26

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the lenses described herein shall consist of this document and the latest issue of MIL-L-3661.

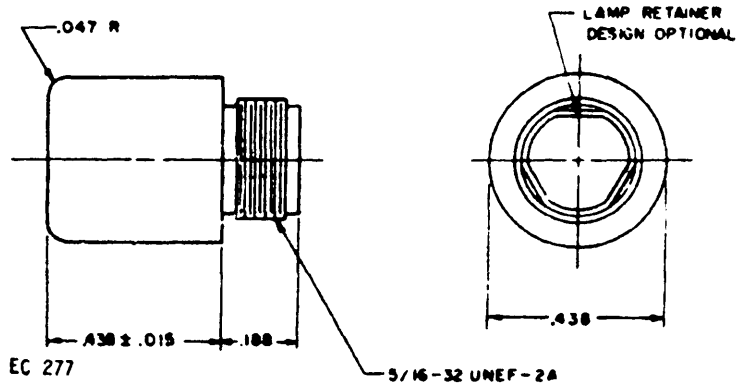

inches	mm
.015	.38
.047	1.19
.188	4.78
5/16	7.94
.438	11.13

NOTES

1. All dimensions are in inches. Unless otherwise specified, tolerances are ± 0.010 inch for decimals.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Ⓐ denotes changes

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Design and construction: See figure.
2. Lens shall accommodate a T-1-3/4 midget flange base incandescent lamp and contain an integral metal mesh.
3. Temperature cycling: -55°C. to +71°C.
4. Sand and Dust: (Dusttight). (A)

Type designation	Mating holder	Lens material	Transmittance	Lens color
LC26BN2	LH73/2	Plastic	Nondiffusing	Blue
LC26BT2	LH73/2	Plastic	Translucent	Blue
LC26CN2	LH73/2	Plastic	Nondiffusing	Colorless
LC26GN2	LH73/2	Plastic	Nondiffusing	Green
LC26GT2	LH73/2	Plastic	Translucent	Green
LC26RN2	LH73/2	Plastic	Nondiffusing	Red
LC26RT2	LH73/2	Plastic	Translucent	Red
LC26WT2	LH73/2	Plastic	Translucent	White
LC26YN2	LH73/2	Plastic	Nondiffusing	Yellow
LC26YT2	LH73/2	Plastic	Translucent	Yellow

Custodians:
Army-EL
Navy-EC
Air Force-82

Review activities:
Army-EL, MU
Navy-AS
Air Force-82, 85

User activities:
Army-
Navy-MC, SH

Preparing activity:
Navy-EC

(Project 6210-0350)

Source: https://assist.dla.mil -- Downloaded: 20261O-16T20:57Z
Check the source to verify that this is the current version before use.