MILITARY SPECIFICATION SHEET


(A)

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS, AND INDICATOR-LIGHT LENSES, (ELECTROMAGNETIC INTERFERENCE TYPE)

DUSTTIGHT LENSES, STYLE LC28

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the lenses described herein shall consist of this document and the latest issue of MIL-L-3661.

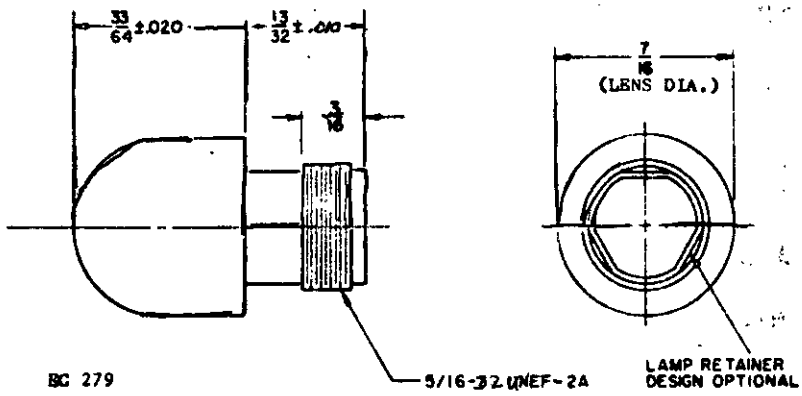

inches	mm
.010	.25
.020	.51
3/16	4.76
5/16	7.94
13/32	10.32
7/16	11.11
33/64	13.10

NOTES:

1. All dimensions are in inches, unless otherwise specified, tolerances are ± 1/32 inch for fractions.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. (A) Lens design optional provided the dimensions specified are not exceeded and the lens configuration shall provide an hemispherical light distribution when illuminated.

(A) denotes changes

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 202610-16T20:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Design and construction: See figure.
2. Lens shall accommodate one type C7A (MS25252-2D) or C9A (MS25252-2J) neon lamp and shall contain an integral metal mesh.
3. Temperature cycling: —55°C to +71°C.

(A) 4. Sand and dust: (Dusttight).

Type designation	Mating holder	Lens material	Transmittance	Lens color	FSN
LC28RN2	LH74/3 and LH74/4	Plastic	Nondiffusing	Red	---
LC28YN2	LH74/3 and LH74/4	Plastic	Nondiffusing	Yellow	---
LC28WT2	LH74/3 and LH74/4	Plastic	Translucent	White 1/	---
LX28CN2	LH74/3 and LH74/4	Plastic	Nondiffusing	Colorless	---

1/ The transmittance shall be suitable for use with a neon lamp.

Custodians:
Army—EL
Navy—EC
Air Force—82

Review activities:
Army—EL, MU
Navy—AS
Air Force—82, 85

User activities:
Army
Navy—MC, SH

Preparing activity:
Navy—EC

(Project 6210-0346)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:58Z
Check the source to verify that this is the current version before use.