
MIL-L-3661/30A
1 August 1968
SUPERSEDING
MIL-L-3661/30
27 March 1967

MILITARY SPECIFICATION SHEET

LENSES, INDICATOR-LIGHT, STYLE LC30

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the lenses described herein shall consist of this document and the latest issue of MIL-L-3661.

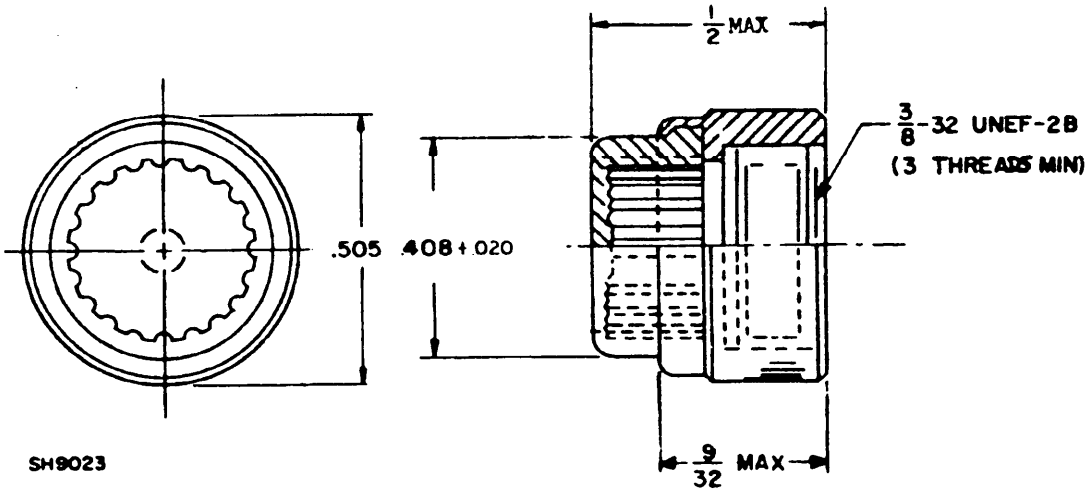

inches	mm
.020	.51
9/32	7.14
3/8	9.53
.408	10.36
1/2	12.70
.505	12.83

NOTES:

1. ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 0.015 INCH FOR DECIMALS.
2. METRIC EQUIVALENTS (TO THE NEAREST .01 MM) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 MM.
3. LENS FLUTE AND KNURL FLANGE DESIGN OPTIONAL.

(A) Denotes change

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Design and construction: See figure.
2. Fluting of lens shall be internal, design optional.
3. Temperature cycling: −55°C. to +125°C.

Type designation	Mating holder	Lens material	Transmittance	Lens color
LC30RN3	LH90/2, 3	Plastic	Nondiffusing	Red
LC30GN3	LH90/2, 3	Plastic	Nondiffusing	Green
LC30YN3	LH90/2, 3	Plastic	Nondiffusing	Yellow
LC30BN3	LH90/2, 3	Plastic	Nondiffusing	Blue
(A) LC30WT3	LH90/2, 3	Plastic	Nondiffusing	White

Custodians:

Army—EL

Navy—EC

Air Force—11

Preparing activity:

Navy—EC

(Project 6210-0263)

Review activities:

Army—EL, MU

Navy—AS, SH

Air Force—11, 85

User activities:

Navy-MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:59Z
Check the source to verify that this is the current version before use.