
INCH-POUND
MIL-DTL-3661/31A
9 July 2019
SUPERSEDING
MIL-L-3661/31
27 March 1967

DETAIL SPECIFICATION SHEET

LENSES, INDICATOR-LIGHT, STYLE LC31

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3661.

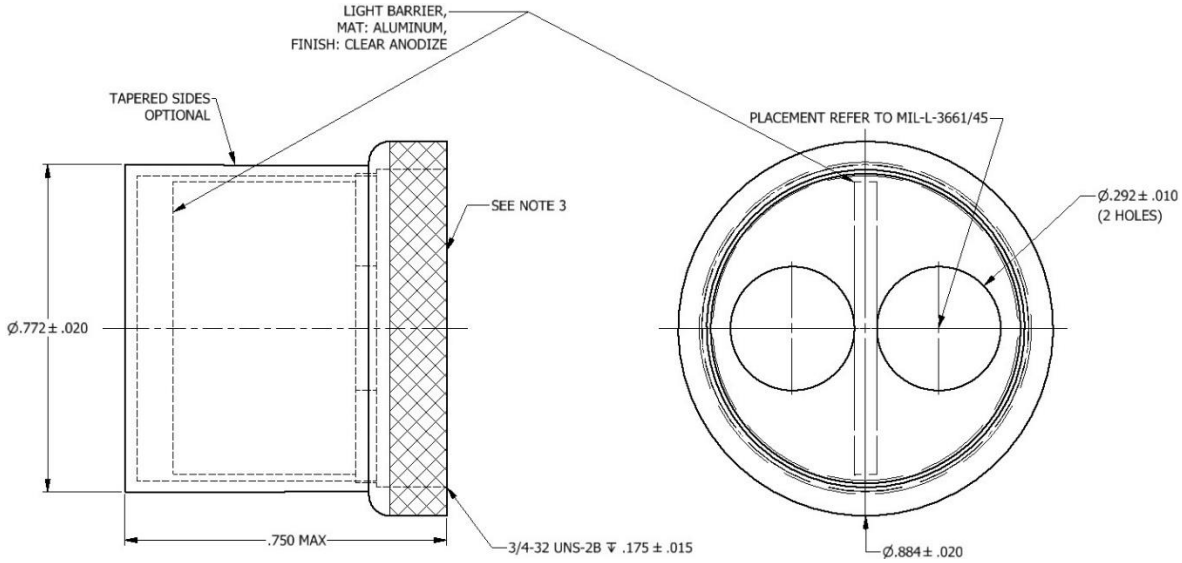

inches	mm
.010	.25
.015	.38
.020	.51
.175	4.45
.292	7.42
3/4	19.05
.770	19.56
.884	22.45

FIGURE 1. Design and construction

NOTES:

1. All dimensions are in inches. Unless otherwise specified, tolerances are ± 1/32 inch for fractions.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Knurl flange ring design optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Design and construction: See figure 1 and table I.
2. The light barrier shall be captive to the lens.
3. Temperature cycling: -55°C to + 71°C.

TABLE I. Designations and characteristics.

Type designation	Mating holder	Lens material	Transmittance	Lens color
LC31WT2	LH87[1]	Plastic	Translucent	White
LC31CN2	LH87[1]	Plastic	Non-diffusing	Colorless

[1] In accordance with MIL-L-3661/45

Referenced documents. In addition to MIL-DTL-3661, this document references the following:
MIL-L-3661/45

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:

Army – CR
Navy – AS
Air Force – 11
DLA – GS2

Preparing activity:

DLA – GS2
(Project 6210-2019-017)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:59Z
Check the source to verify that this is the current version before use.