INCH-POUND

MIL-C-42078
30 April 1992
SUPERSEDING
RR-C-00633b
28 March 1968
RR-C-633a
11 August 1961

MILITARY SPECIFICATION

CRADLES, HOSPITAL BED CLOTHING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a folding cradle for hospital bed clothing, suitable for the suspension of bed clothing above a bed patient.

1.2 Classification.

1.2.1 Types. Cradles shall be of the following types, as specified (see 6.1).

Type I - For general hospital use
Type II - For field hospital use

2. APPLICABLE DOCUMENTS

2.1 Government Documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Headquarters, Defense Personnel Support Center, ATTN: Directorate of Medical Materiel, DPSC-MST, 2800 South 20th Street, Philadelphia, PA 19101, by using the self-addressed Standardization Document Improvement Proposal, (DD Form 1426) appearing at the end of this document or by letter.

AMSC/NA FSC 6530

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

Federal

PPP-B-601	-	Boxes, Wood, Cleated-Plywood
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	-	Boxes, Shipping, Fiberboard

Military

MIL-P-116	-	Preservation, Methods, Of
MIL-L-10547	-	Liners, Case, and Sheet, Overwrap; Water-Vaporproof, or Waterproof, Flexible

STANDARDS

Military

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-794	-	Parts and Equipment, Procedures for Packaging and Packing of

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from: Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia PA 19111-5094).

2.1.2 Other Government documents, drawings and publications. Other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN IRON AND STEEL INSTITUTE (AISI)

Steel Products Manual, Stainless and Heat Resisting Steel

(Application for copies should be addressed to the American Iron and Steel Institute, 150 East 42nd Street, New York, NY 10017).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets, or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials. All material used in the fabrication of the cradles shall be American Iron and Steel Institute (AISI) type 302 or 304 corrosion-resisting steel.

3.2 Design and construction. Design and construction shall be in accordance with figure 1 and figure 2, as applicable, and as hereinafter specified.

3.2.1 Type I. The type I cradle shall be in strict accordance with figure 1. The cradle shall be so designed as to fold compactly for easy storage. The hoops and longitudinal members shall be 5/8 inch wide corrosion-resisting steel strips having a finished thickness not less than 0.125 inch thick (No. 11, Standard Gage), and cut and formed to proper shape. Each hoop shall be riveted loosely to the longitudinal members. A round washer shall be located between the hoops and the longitudinal members at the riveting points. The rivets shall be peened in such a manner as to hold the frame securely and still allow rotation of the hoops.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

3.2.2 Type II. The type II cradle shall be in strict accordance with figure 2, sheets 1 and 2. The cradle shall be a compact, folding, portable, lightweight, single integral unit, which can be easily set up and collapsed. The cradle shall be of all riveted construction. The steel strip used in the fabrication of the cradle shall be 5/8 inch wide corrosion-resisting steel strips having a finished thickness not less than 0.125 inch thick (No. 11, Standard Gage), and cut and formed to proper shape. Peening of the rivets shall be in such a manner as to hold the frame securely, and still allow the cradle to fold.

3.2.3 Finish. All surfaces of the cradle shall be a No. 3 commercial finish. The finished cradle shall be clean, free of oil, grease, buffing compound, and other foreign matter.

3.3 Identification marking. Each cradle shall be permanently and legibly die stamped with the name or registered trademark of the manufacturer, the contract or purchase order number. Marking secured by adhesives shall not be used.

3.4 Workmanship. All ends of braces, sharp corners, and edges shall be rounded and polished smooth before finishing. Riveting shall be neatly done without projections or burrs. The cradles shall be free from defects which detract from their appearance or which may impair their serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Records. Records of examinations and tests performed by, or for, the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract, and for a period of 3 years after delivery of the supplies to which such records relate.

4.1.3 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual and auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.4 Certificates of quality. Certificates of quality supplied by the manufacturer of the component or material may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the National Stock Number (NSN), the item identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 and table I. The unit of product for examination purposes shall be one hospital bed clothing cradle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

TABLE I. Sampling for examination.

	Inspection level	AQL (percent defective)
For visual examination		
Major defects	II	1.0
Minor defects	II	4.0
For dimensional examination	S-1	2.5

4.2.2 For tests. Sampling for tests, including dimensional test, shall be conducted in accordance with MIL-STD-105, with an AQL of 2.5 (percent defective) and an inspection level of S-1. The unit of product for test purposes shall be one hospital bed clothing cradle.

4.3 Examination. The hospital bed clothing cradle shall be examined for defects including, but not limited to, those listed in table II.

4.3.1 Classification of defects. Examination shall be conducted in accordance with the classification of defects listed in table II below. Examination shall not be restricted to the classification of possible defects.

TABLE II. Classification of defects.

Category	Defects
Major	
101	Any component missing.
102	Component parts improperly aligned or fitted.
103	Cradle cannot be readily set up or collapsed.
104	Cradle not free of cracks, tears, ruptures, and deformed areas.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects - continued.

Category	Defects
Minor	
201	Joints bind in operation.
202	Rivets not properly set, peened, and deburred.
203	Finish not free of coarse grind marks and scratches.
204	Cradle not clean, and free from foreign matter.
205	Identification marking missing, incomplete, impermanent, or illegible.

4.3.2 Dimensional examination. The cradles shall be examined for defects in dimensions. Any dimension not within the tolerances specified herein shall be classified as a defect.

4.4 Tests. Tests shall be conducted, as necessary, to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more test characteristics.

4.5 Inspection of packaging. The sampling and inspection of the preservation and interior package marking shall be in accordance with groups A and B quality conformance inspection requirements of MIL-P-116. The sampling and inspection of the packing and marking for shipment and storage shall be in accordance with the quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Cleaning and drying. Each cradle shall be cleaned and dried in accordance with MIL-P-116.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

5.1.1.2 Preservative applications. Preservatives shall not be used.

5.1.1.3 Unit package. Each cradle shall be packaged in accordance with MIL-P-116 method IC-1. Each cradle shall be further packaged in a box conforming to PPP-B-636, class domestic. Closure shall be as specified in the applicable box specification.

5.1.2 Level C.

5.1.2.1 Unit package. Preservation for the cradle shall conform to the requirements of MIL-STD-794 for level C.

5.2 Packing. Packing shall be level A, B or C, as specified (see 6.2).

5.2.1 Level A. Twelve unit packages containing cradles shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-601, overseas type, PPP-B-621, class 2, or PPP-B-636, class weather-resistant. Closure and strapping shall be as specified in the applicable box specification.

5.2.1.1 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall be as specified in the liner specification. Case liner shall not be required for fiberboard boxes. Each fiberboard box shall be waterproofed as specified in PPP-B-636.

5.2.2 Level B. Twelve unit packages containing cradles shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-601, domestic type, class 1, or PPP-B-636, class domestic. Closure shall be as specified in the applicable box specification.

5.2.3 Level C. Twelve unit packages containing cradles shall be packed in accordance with the requirements of MIL-STD-794 for level C.

5.2.4 Packing variation permitted. If the required number of units to be shipped is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which will insure safe delivery to destination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

5.2.5 Unitized loads. Unitized loads, commensurate with the level of packing specified in the contract or order, shall be used whenever total quantities for shipment to one destination exceed 250 pounds or 20 cubic feet. Loads shall be unitized on pallets conforming to MIL-STD-147. Quantities less than 20 cubic feet need not be unitized. Pallet loads including the pallet shall not exceed 43 inches in length, 50 inches in width, and 54 inches in height. Pallet shall conform to type IV or type V.

5.2.5.1 Levels A and B. The cradle packed as specified in 5.2.1 and 5.2.2 shall be unitized on pallets as specified in 5.2.5.

5.2.5.2 Level C. The cradle packed as specified in 5.2.3 shall be unitized as specified in MIL-STD-794.

5.3 Marking.

5.3.1 Levels A, B and C. Each unit pack, intermediate package, exterior container and unitized load shall be marked as specified in MIL-STD-129.

5.4 General.

5.4.1 Exterior container. Exterior container (see 5.2.1, 5.2.2, and 5.2.3) shall be of minimum tare and cube consistent with the protection required and shall contain equal quantities of identical stock numbered items to the greatest extent practicable.

5.4.2 Packaging inspection. The inspection of these packaging requirements shall be in accordance with 4.5.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The hospital bed clothing cradle is intended for the suspension of bed clothing above a bed patient.

6.2 Acquisition requirements.

a. Title, number, and date of the specification.

b. Issue of DODISS to be cited in the solicitation and if required, the specific issue of individual documents referenced (see 2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

d. National Stock Number.

6.3 Subject term (key word) listing

Blanket, Hospital
Clinic
Collapsible Metal Arch
M.U.S.T.
Sheet, Hospital
Suspended Vault

6.4 National Stock Number (NSN) coverage. This specification covers the following items shown in the Federal Supply Catalog.

National Stock Number	Item identification
6530-00-705-3075	Cradle, Hospital Bed Clothing
6530-00-705-3080	Cradle, Hospital Bed Clothing, Field Type

6.5 Commodity coverage. This specification does not cover all types, classes, grades, or sizes of the commodity indicated by the title of this specification, or those which are commercially available, but is intended to cover the type which is normally procured to meet requirements.

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify modifications, additions, corrections, and deletions from the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:

Air Force - 03
Army - MD
Navy - MS

Review activities:

Air Force - 50
Army - TM
Navy - YD

Civil Agency Coordinating Activities:

FDA - MPQAS
GSA-FSS-FCGC
USPHS
VA - OSS

PREPARING ACTIVITY:

DoD-MB

Agent:

DLA - DM

Project No. 6530-2251

Location: CRDLM13A.DOC

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.



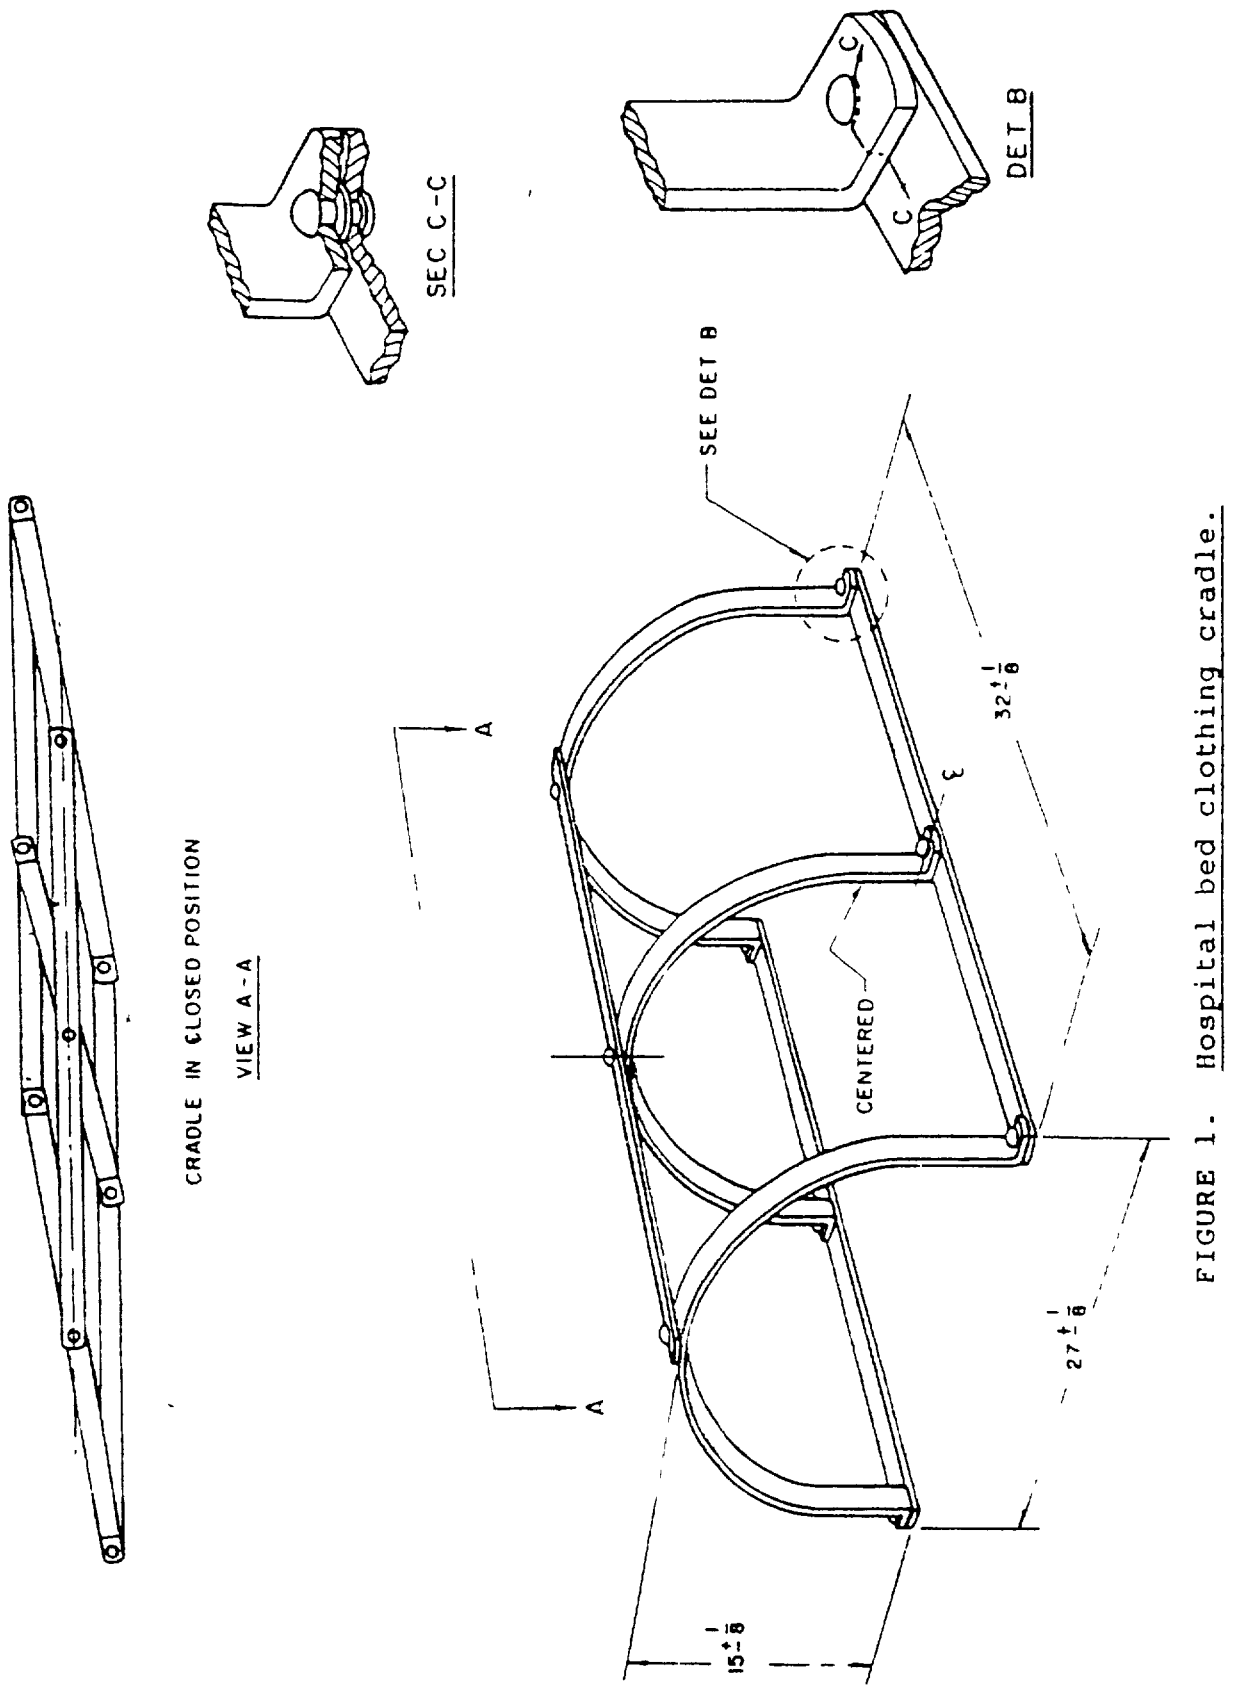


FIGURE 1. Hospital bed clothing cradle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

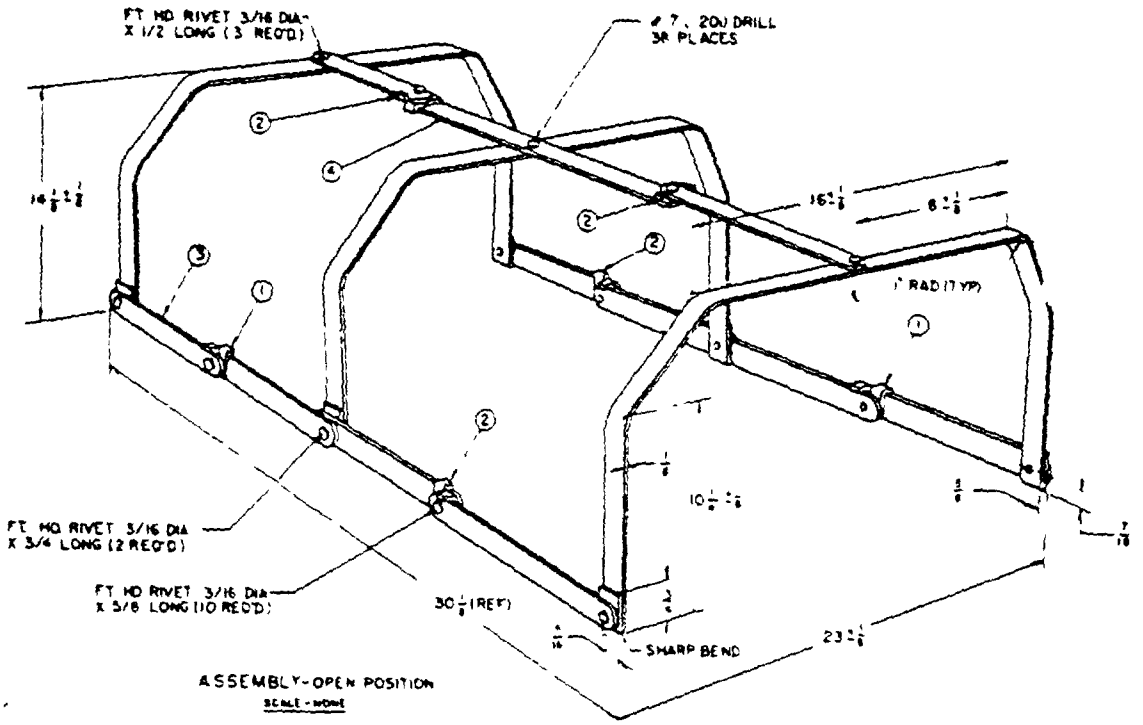

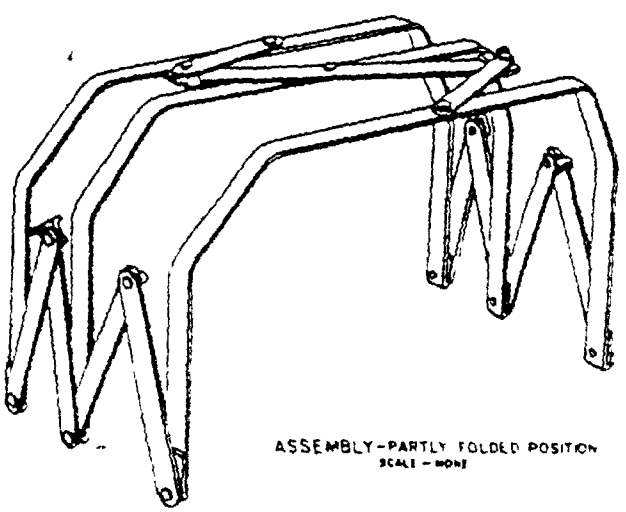


GENERAL NOTES.
1-REMOVE BURRS & ROUND OFF ALL SHARP EDGES TO 1/32 R MIN.
2-COUNTERSINK ALL DRILLED HOLES TO BREAK SHARP EDGES UNLESS OTHERWISE NOTED.
3. Round head rivets may be used instead of flat head.


NOTE
MEMBERS MUST MOVE SMOOTHLY WITHOUT BINDING OR EXCESSIVE PLAY

FIGURE 2, Sheet 1. Hospital bed clothing cradle, field type.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

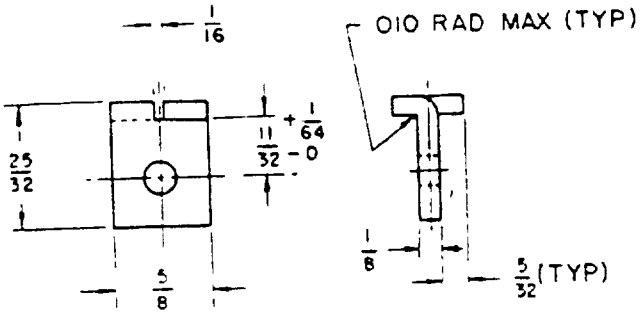


① STOP WASHER (2 REQ'D)
SCALE 2•1

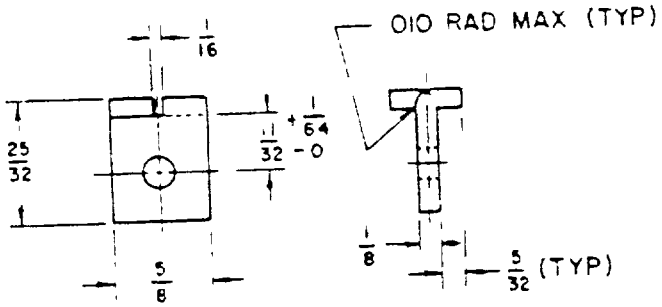

② STOP WASHER (4 REQ'D)
SCALE 2•1

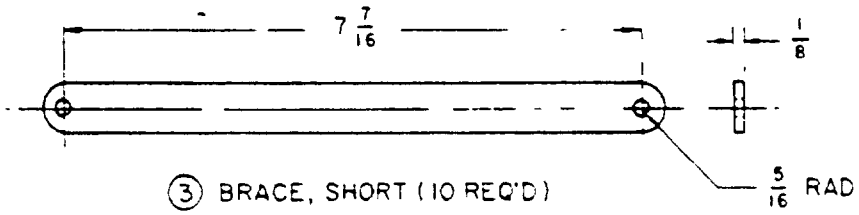

③ BRACE, SHORT (10 REQ'D)
SCALE 1•1

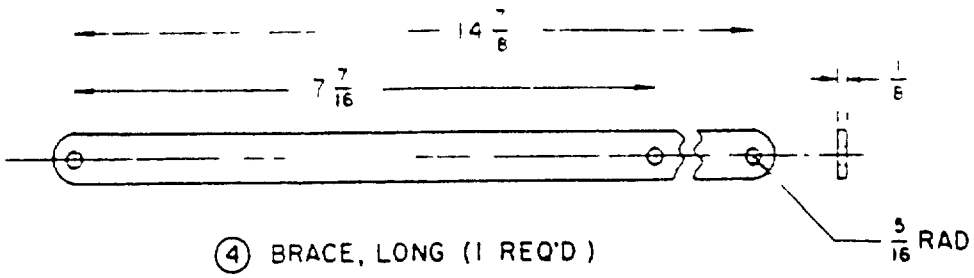

④ BRACE, LONG (1 REQ'D)
SCALE 1•1

FIGURE 2, Sheet 2. Hospital bed clothing cradle, field type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER: MIL-C-42078	2. DOCUMENT DATE (YYMMDD): 30 April 1992

3. DOCUMENT TITLE: CRADLES, HOSPITAL BED CLOTHING

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME DEFENSE PERSONNEL SUPPORT CENTER ATTN: DPSC-MSE	b. TELEPHONE (Include Area Code) (1) Commercial: AC 215-737-2870 (2) AUTOVON: AV 444-2870
c. ADDRESS (Include Zip Code) 2800 SO. 20TH STREET PHILADELPHIA, PA 19145	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 — Previous editions are obsolete — 9679C

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.