INCH-POUND

MIL-H-42065A
20 March 1992
SUPERSEDING
MIL-H-42065
19 June 1989

MILITARY SPECIFICATION

HANDPIECE KIT, DENTAL (Portable, Battery Powered)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers an autoclavable, battery powered, dental handpiece kit suitable for use in field dentistry. (See 6.1)

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications, and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation. (see 6.2)

Federal Specifications

PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Boxes, Shipping, Fiberboard.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Headquarters, Defense Personnel Support Center, Directorate of Medical Materiel, DPSC-MSE, 2800 South 20th Street, Philadelphia, PA 19101, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC/NA FSC 6520
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:19Z
Check the source to verify that this is the current version before use.

Federal Standards

FED-STD-151 - Metals, Test Methods.

Military Specifications

MIL-P-116 - Preservation, Methods of.
MIL-L-10547 - Liners, Case, and Sheet, Overwrap; Water-Vaporproof, or Waterproof, Flexible.

Military Standards

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized Unit Loads.
MIL-STD-794 - Parts and Equipment, Procedures for Packaging of.

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

B308 - Specification for Aluminum-Alloy 6061-T6 Standard Structural Shapes, Rolled or Extruded.
E 18 - Methods for Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials.
F899 - Specification for Stainless Steel Billet, Bar, and Wire for Surgical Instruments.

(Unless otherwise indicated copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Ave., Phila Pa 19120-5099).

(Copies of specifications, and standards required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:19Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, (except for related associated detail specifications, specification sheets, or MS standards) the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The components of the handpiece shall be in accordance with the applicable requirements as specified herein. Shall be a compact battery powered handpiece kit. The handpiece kit shall be lightweight and portable. The handpiece kit shall consist of: one (1) micromotor with attachable autoclavable straight handpiece and autoclavable contra-angle handpiece, two (2) battery packs, a 110/220 volt, 50/60 Hertz (Hz) battery charger, a rheostat controller with a spring steel clip, and a coiled cord. There shall be a carrying pouch with belt loops. The carrying pouch shall be capable of being carried on the waist and shall securely hold both handpiece and battery.

3.1.1 Micromotor. The micromotor shall operate on 12 volts direct current. The micromotor shall be fitted with a 2 meter (nominal) in length, coiled extensible power cord and terminating with a plug-in battery connector.

3.1.2 Rheostat controller. The rheostat controller shall be capable of variable speed operation of the micromotor (no-load) to no less than 20,000 revolutions per minute (rpm), shall have a reversible switch, and shall be capable of (no-load) torque output of no less than 150 grams-centimeters (gm-cm).

3.1.3 Battery pack. The battery pack shall be rechargeable for at least 500 times. The charging time from a state of depletion to full charge shall be no more than 5 hours. The battery pack shall not exceed 140 mm in length, nor 48 mm in width, nor 22 mm in depth, nor 190 grams in weight. The battery pack shall be capable of operating the micromotor under a load for at least 4 hours. The battery pack shall have an on/off switch.

3.1.4 Battery charger. The battery charger shall be capable of operating on 110 volts or 220 volts. The battery charger shall have 110/220 volt switch. The battery charger may not exceed a total volume of 130 cm^3 nor 220 grams in weight. The battery charger shall be provided with a 2 prong plug and a suitable charging cord.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:19Z
Check the source to verify that this is the current version before use.

3.2 Material.

3.2.1 Micromotor. The casing of the micromotor shall be fabricated of Aluminum Alloy 6061-T6 in accordance with ASTM B308 for composition only.

3.2.2 Handpiece.

3.2.2.1 Contra-angle. The contra-angle handpiece shall have sealed bearings which require no lubrication after autoclaving and shall conform to Figure 1 and table I for materials, hardness and finish.

3.2.2.2 Straight. The straight handpiece shall have sealed bearings which require no lubrication after autoclaving and shall conform to Figure 2 and table II for material, hardness and finish.

TABLE I. Materials, hardness and finish (contra-angle)

Component	Material	Rockwell hardness	Finish
Housing assembly	Aluminum alloy 6061-T6 in accordance with ASTM B308 for composition only.	-----	Satin or matte 1/
Spacer	416 H Martensitic stainless steel in accordance with ASTM F899 for composition only.	-----	Smooth
Input shaft assembly			
Shaft	416 H Martensitic stainless steel in accordance with ASTM F899 for composition only.	28-32	Smooth
Gear	440 F Martensitic stainless steel in accordance with ASTM F899 for composition only.	56-60	Smooth

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:19Z
Check the source to verify that this is the current version before use.

TABLE I. Materials, hardness and finish (contra-angle) Cont'd

Component	Material	Rockwell hardness	Finish
Nose assembly	Aluminum alloy 6061-T6 in accordance with ASTM B308 for composition only.	-----	Satin or matte 1/
Shoulder retaining ring	630 (17-4Ph) Precipitation hardening stainless steel in accordance with ASTM F 899 for composition only.	-----	Smooth
Locking collar	416 H Martensitic stainless steel in accordance with ASTM F899 for composition only.	28-32	Satin or matte 1/
Shaft assembly			
Shaft	Aluminum alloy 6061-T6 in accordance with ASTM B308 for composition only.	-------	Smooth
Gears	440 F Martensitic stainless steel in accordance with ASTM F899 for composition only.	56-60	Smooth
Head	416H Martensitic stainless steel in accordance with ASTM F899 for composition only.	28-32	Satin or matte 1/
Seal	Mylar	-------	--------
Spindle assembly			
Spindle	416H Martensitic stainless steel in accordance with ASTM F899 for composition only.	28-30	Smooth

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:19Z
Check the source to verify that this is the current version before use.

TABLE I. Materials, hardness and finish (contra-angle) Cont'd

Component	Material	Rockwell hardness	Finish
Gear	440F Martensitic stainless steel in accordance with ASTM F899 for composition only.	56-60	Smooth
Latch	631 (17-7PH) precipitation hardening stainless steel in accordance with ASTM F899 for composition only.	35-40	Electroless Nickel
Knob	Polyimide resin in accordance with SAE ASM 3619B for composition only.	-------	Smooth
Screw	304 Austenitic stainless steel in accordance with ASTM F899 for composition only.	-------	Smooth
Cover plate	416H Martensitic stainless steel in accordance with ASTM F899 for composition only.	28-32	Satin or Matte 1/

1/ matte finish shall exhibit a uniform nondirectional surface texture equivalent to that produced by lightly blasting the prepared surface with fine abrasives under pressure.

Component	Material	Rockwell hardness	Finish
Housing assembly	Aluminum alloy 6061-T6 in accordance with ASTM B308 for composition only.	-------	Satin or matte 1/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:19Z
Check the source to verify that this is the current version before use.

TABLE II. Materials, hardness and finish (straight) Cont'd

Drive shaft assembly	416H Martensitic stainless steel in accordance with ASTM f899 for composition only.	28-32	Smooth
Ball	440C Martensitic stainless steel in accordance with ASTM F899 for composition only.	56-60	Smooth
Spindle housing	416H Martensitic stainless steel in accordance with ASTM F899 for composition only.	28-32	Smooth
Collet opener	631 (17-7PH) precipitation hardened stainless steel in accordance with ASTM F899 for composition only.	-------	Smooth
Release ring	416H Martensitic stainless steel in accordance with ASTM F899 for composition only.	28-32	Satin or matte 1/
Spring	631 (17-7PH) precipitation hardened stainless steel in accordance with ASTM F899 for composition only.	-------	----------
Thrust washer	416H Martensitic stainless steel in accordance with ASTM F899 for composition only.	28-32	Smooth
Bearing	440C Martensitic stainless steel in accordance with ASTM F899 for composition only.	56-60	Smooth
Nose cone assembly	416H Martensitic stainless steel in accordance with ASTM F899 for composition only.	28-32	Satin or matte 1/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:19Z
Check the source to verify that this is the current version before use.

1/ Matte finish shall exhibit a uniform nondirectional surface texture equivalent to that produced by lightly blasting the prepared surface with fine abrasives under pressure.

3.2.3 Battery. The outer case shall be fabricated of a durable plastic. The battery shall be nickel-cadmium.

3.2.4 Battery charger. The outer shell shall be fabricated of a durable plastic.

3.2.5 Rheostat controller. The outer shell shall be fabricated of Aluminum Alloy 6061-T6 in accordance with ASTM B308 for composition only. The controller shall have a DC power jack, a DC power plug, variable speed control and a forward/reverse switch.

3.2.6 Carrying pouch. The carrying pouch shall be constructed of sturdy and durable material.

3.3 Design. The straight handpiece shall accept standard ADA/ANSI class 2 burs and the contra-angle handpiece shall accept standard ADA/ANSI class 1 burs. Both handpieces shall be quickly and easily combined with the micromotor such that the overall length is no more than 160 mm, nor 26 mm in diameter, nor 200 grams in weight.

3.4 Autoclavability. Each handpiece shall show no evidence of corrosion when autoclaved as specified in 4.6.3.

3.5 Finish. The micromotor surface shall be smooth and shall have a black oxidized finish.

3.6 Runout. The runout of a true-running mandrel gage inserted in each handpiece shall not be more than 0.003 inch, when tested as specified in 4.6.4.

3.7 Identification marking. Each handpiece shall be permanently and legibly marked with the name or registered trademark of the manufacturer. The micromotor shall be marked with the name of the country of origin.

3.8 Instructions. Each handpiece kit shall be furnished with instructions for maintenance and use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:19Z
Check the source to verify that this is the current version before use.

3.9 Workmanship. The handpieces, micromotor and controller shall be free from nicks, burrs, sharp edges and coarse grind marks. The battery packs and battery charger shall be free from cracks on the outer shell or any other defects which may impair their intended use or function.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1. Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the materials used in the handpiece, may be furnished in lieu of actual performance of such testing by the contractor, provided that lot identity has been maintained and can be demonstrated to the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:19Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspection. The inspection of the handpiece kit, shall be classified as follows.

1. First article inspection.

2. Quality conformance inspection.

4.3 First article inspection. When a first article is specified in the contract, the first article inspection shall consist of all examinations specified in 4.4.1 and all testing specified in 4.5 (as applicable), and shall apply to the first article sample only.

4.4 Quality conformance inspection. The examinations and tests required to assure conformance of those items or lots of items to be offered for acceptance are classified as specified in tables III, IV and V (see 4.4.1, 4.4.2 and 4.5).

4.4.1 Sampling for examination. Sampling for examination for the handpiece kit shall be conducted in accordance with MIL-STD-105. The inspection levels and acceptance quality levels (AQLs) shall be as indicated in Table III. The unit of product for examination purposes shall be one handpiece kit.

TABLE III. Examination criteria.

Type defect	Inspection level	AQL (Percent defective)
Major A	II	1.0
Major B	S-1	2.5
Minor A	II	2.5
Minor B	S-1	4.0

4.4.2 Sampling for tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and Table IV, for the handpiece kit. The acceptance number shall be zero for all sample sizes. The unit of product for test purposes shall be one handpiece kit. Where feasible, the same sample unit may be used for the determination of two or more test characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:19Z
Check the source to verify that this is the current version before use.

TABLE IV. Test criteria.

Characteristic	Requirement	Test procedure	Inspection level
Material	3.2	ASTM B308 ASTM F899	1/
Hardness	3.2	ASTM E18	S-1
Autoclavability	3.4	4.6.3	S-1
Runout	3.6	4.6.4	S-1

/1 A sufficient amount from each lot of raw materials used in the construction of the item shall be selected for chemical analysis when certificates of quality are not available as specified in 4.1.3.

4.5 Examination. The handpiece kit shall be examined to determine compliance with requirements contained in this specification. Examination shall be conducted in accordance with the following classification of defects. Examination shall include, but shall not be limited to, the defects listed in table V.

TABLE V. Classification of defects.

Categories	Defects
Major	
101	Rheostat controller does not have a reversible switch.
102	Handpieces do not turn freely or smoothly.
103	Battery charger does not have 110/220 volt switch.
Minor	
201	Dimensions and weight not as specified.
202	External surfaces of handpieces and micromotor not smooth.
203	Finish not as specified.
204	Service data or tools missing.
205	Identification marking not present, correct, complete or legible.

4.6 Tests. Tests shall be conducted to determine compliance with specification requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:19Z
Check the source to verify that this is the current version before use.

4.6.1 Chemical composition. In the absence of certificates of quality for raw material, chemical analysis shall be conducted in accordance with method 111 or method 112 of FED-STD-151. In case of dispute, method 111 shall govern.

4.6.2 Hardness. Hardness shall be determined in accordance with American Society for Testing and Materials Designation E 18 (Rockwell).

4.6.3 Autoclavability. Each handpiece shall be steam autoclaved at $270^{0} \pm 5^{0}$ Fahrenheit (F) and 27 $\pm$ 1 pounds per square inch (psi) pressure for a minimum of 20 minutes. After each handpiece is removed from the autoclave, the entire surface shall be examined for evidence of corrosion.

4.6.4 Runout. The runout shall be measured by inserting a true running bur shank 0.0925 inch in diameter into the bur socket of each handpiece. Each handpiece shall be connected to the micromotor before commencing the test. At the end of the bur shank, an indicator shall be placed measuring in increments of 0.001 inch. The bur shank shall be rotated, by turning the micromotor, through 360 degrees with maximum and minimum readings recorded. The difference between these readings shall be the total runout.

4.7 Inspection of packaging. The sampling and inspection of the preservation and interior package marking shall be in accordance with groups A and B quality conformance inspection requirements of MIL-P-116. The sampling and inspection of the packing and marking for shipment and storage shall be in accordance with quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C, as specified (see 6.1).

5.1.1 Level A.

5.1.1.1 Cleaning and drying. The handpiece shall be cleaned and dried in accordance with MIL-P-116.

5.1.1.2 Preservative applications. Preservatives shall not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:19Z
Check the source to verify that this is the current version before use.

5.1.1.3 Unit package. Each handpiece shall be packaged in accordance with MIL-P-116, method IC-1. Closure shall be as specified in the applicable box specification.

5.1.2 Level C.

5.1.2.1 Unit package. Preservation for the handpiece shall conform to the requirements of MIL-STD-794 for level C.

5.2 Packing. Packing shall be level A, B or C, as specified (see 6.1).

5.2.1 Level A. Twenty unit packages containing the handpiece shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-601, overseas type, PPP-B-621, class 2, or PPP-B-636, class weather-resistant. Closure and strapping shall be as specified in the applicable box specification.

5.2.1.1 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall be as specified in the liner specification. Case liner shall not be required for fiberboard boxes. Each fiberboard box shall be waterproofed as specified in PPP-B-636.

5.2.2 Level B. Twenty unit packages containing the handpiece shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-601, domestic type, PPP-B-621, class 1, or PPP-B-636, class domestic. Closure shall be as specified in the applicable box specification.

5.2.3 Level C. The level C packaging for the handpiece shall be packed in accordance with the requirements of MIL-STD-794 for level C.

5.2.4 Packing variation permitted. If the required number of units to be shipped is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which will insure safe delivery to destination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:19Z
Check the source to verify that this is the current version before use.

5.2.5 Unitized loads. Unitized loads, commensurate with the level of packing specified in the contract or order, shall be used whenever total quantities for shipment to one destination exceed 250 pounds or 20 cubic feet. Loads shall be unitized on pallets conforming to MIL-STD-147. Quantities less than 20 cubic feet need not be unitized. Pallet loads including the pallet shall not exceed 43 inches in length, 52 inches in width, and 54 inches in height. Pallets shall conform to type IV or Type V.

5.2.5.1 Levels A and B. The handpiece packed as specified in 5.2.1 and 5.2.2 shall be unitized on pallets as specified in 5.2.5.

5.2.5.2 Level C. The handpiece packed as specified in 5.2.3 shall be unitized as specified in MIL-STD-794.

5.3 Marking.

5.3.1 Levels A, B and C. Each unit pack, intermediate package, exterior container and unitized load shall be marked as specified in MIL-STD-129.

5.4 General.

5.4.1 Exterior container. Exterior container (see 5.2.1, 5.2.2, and 5.2.3) shall be of minimum tare and cube consistent with the protection required and shall contain equal quantities of identical stock numbered items to the greatest extent practicable.

5.4.2 Packaging inspection. The inspection of these packaging requirements shall be in accordance with 4.7.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

6.1 Intended use. The handpiece kit covered by this document is intended to be an autoclavable battery powered handpiece suitable for in field dentistry. (See 1.1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:19Z
Check the source to verify that this is the current version before use.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number, and date of the specification.

(b) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

(c) Applicable National Stock Number.

(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3. National Stock Number (NSN) coverage. This specification covers the following items appearing in the Federal Supply Catalog:

National Stock Number	Item Identification
6520-01-239-4696	HANDPIECE KIT, DENTAL (Portable, Battery Powered)

6.4 Subject term (key word) listing.

Handpiece
Portable
Dental

MILITARY INTERESTS:

Custodians:

Army-MD
Navy-MS
Air Force-03

Preparing Activity:

DoD-MB

Agent:

DLA-DM

CIVIL AGENCY COORDINATING ACTIVITIES:

VA-OSS
PHS
FDA-MPQAS

Project No. 6520-2528
Location: ML (Disk #2)
(DENTAL)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:19Z
Check the source to verify that this is the current version before use.

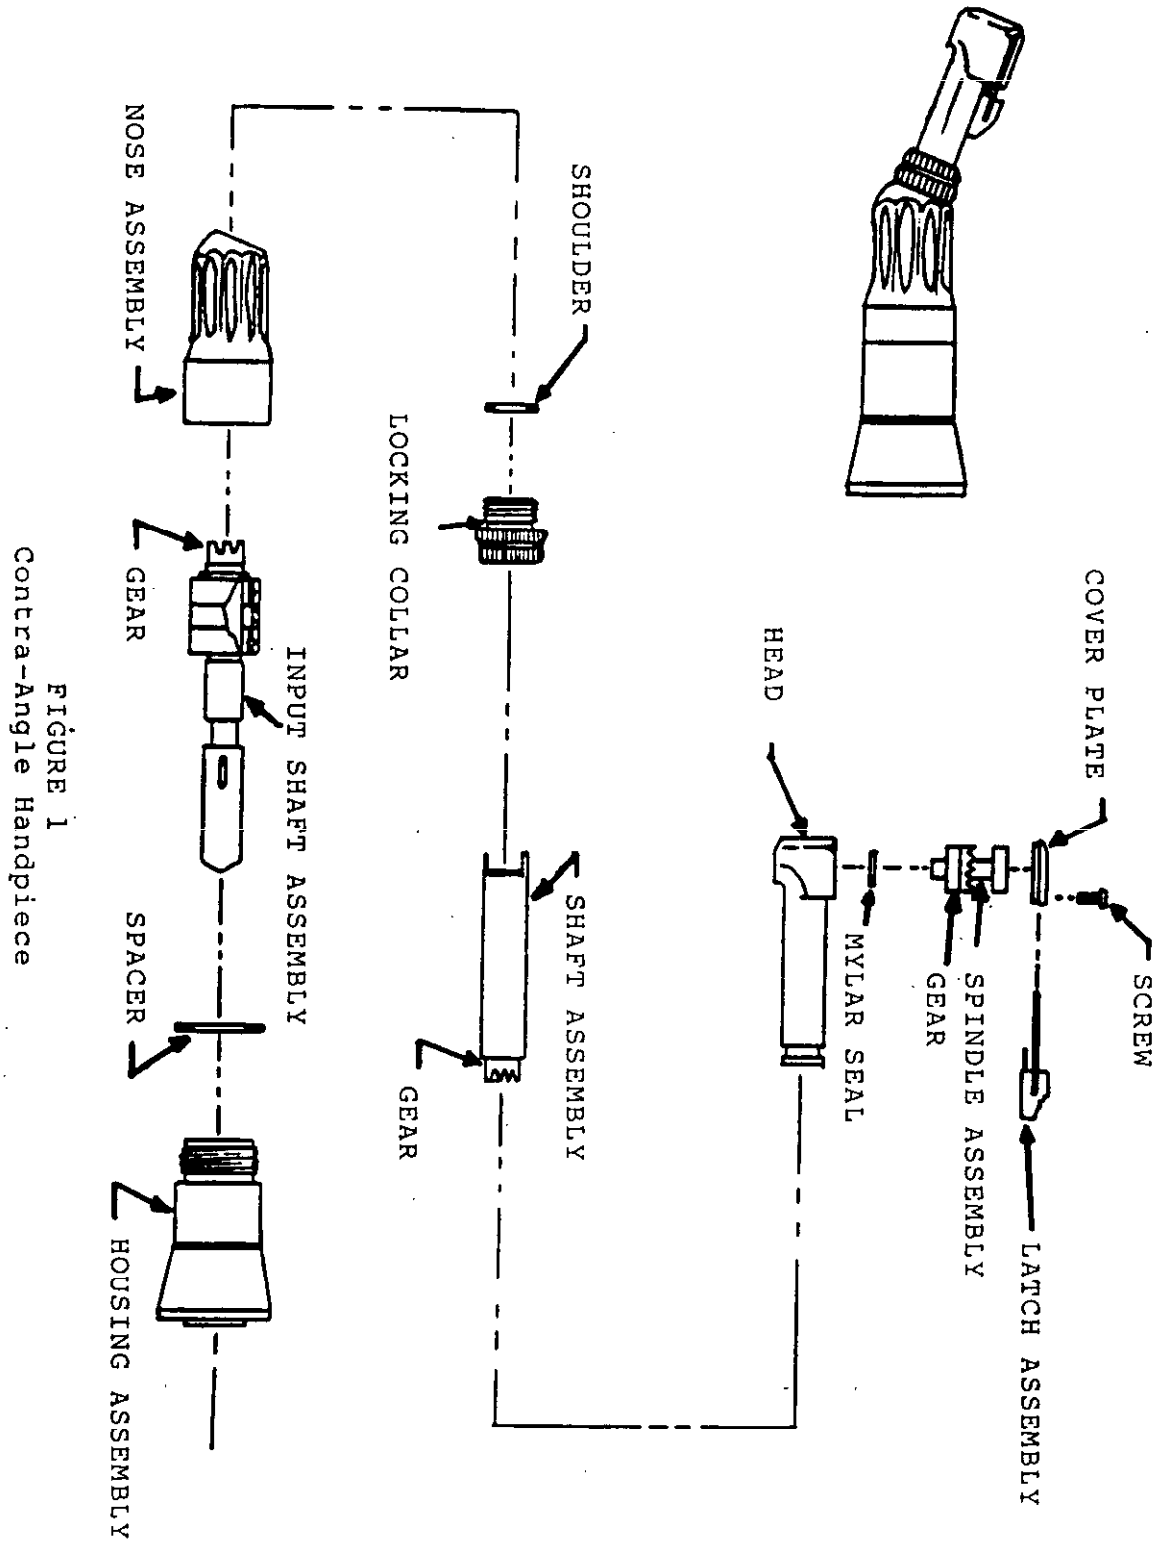


FIGURE 1
Contra-Angle Handpiece

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:19Z
Check the source to verify that this is the current version before use.

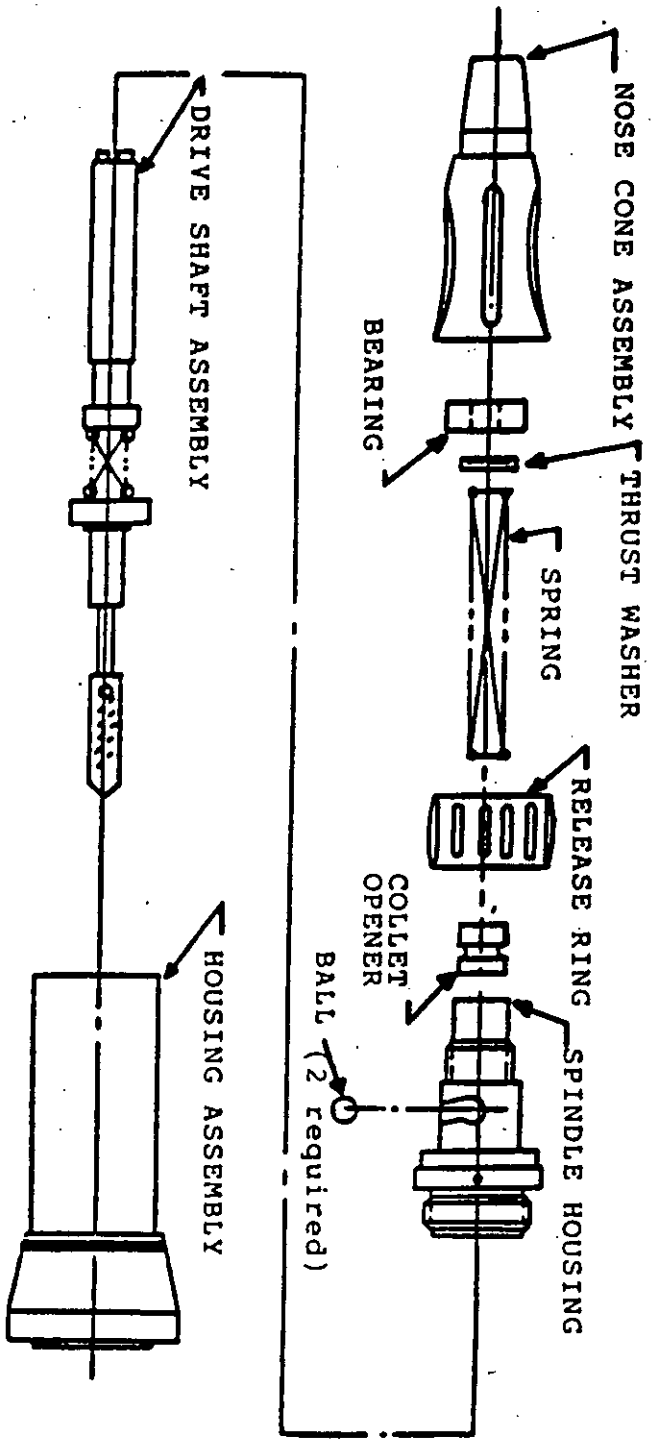


FIGURE 2
Straight Handpiece

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-H-42065A	92-03-20

3. DOCUMENT TITLE
HANDPIECE KIT, DENTAL (Portable, Battery Powered)

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
Defense Personnel Support Center	(215)737-2870	444-2870
c. ADDRESS (Include Zip Code) ATTN: DPSC-MSE 2800 S. 20th Street Philadelphia, PA 19101	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 — Previous editions are obsolete — 98/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:19Z
Check the source to verify that this is the current version before use.