INCH-POUND
MIL-P-42075
14 February 1991
SUPERSEDING
Fed. Spec.
O-P-46E
9 November 1976 and
Interim Amend. #1
10 March 1977

MILITARY SPECIFICATION

PAD, HEATING, CHEMICAL

This specification is approved for use by by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of chemical heating pad, and refill, suitable for medical field use where electricity is not available.

1.2 Classification.

Class I - Pad, Heating, Chemical
Class II - Refill, Chemical Heating Pad

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Defense Personnel Support Center, Directorate of Medical Materiel, Technical Operations Division, DPSC-RST, 2800 South 20th Street, Philadelphia, PA 19101, by using the self-addressed standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6530

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2b).

SPECIFICATIONS

Federal

CCC-C-419	-	Cloth, Cotton, Duck, Unbleached, Plied-yarns, Army and Numbered
CCC-D-950	-	Dyeing and Aftertreating Processes for Cotton Cloths
PPP-B-636	-	Boxes, Shipping, Fiberboard

Military

MIL-P-116	-	Preservation, Methods of

STANDARDS

Federal

Fed. Std. No. 123	-	Marking for Shipment (Civil Agencies)
Fed. Std. No. 191	-	Textile Test Methods
Fed. Std. No. 751	-	Stitches, Seams and Stitchings

Military

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

(Unless otherwise indicated copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099).

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

herein (except for related associated detail specifications, specification sheets, MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified in the procurement document, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.1.2.1 and 6.3).

3.2 Material.

3.2.1 Cotton duck. Cotton duck shall conform to type III, 9.85 ounces per square yard, of CCC-C-419. The cotton duck shall be vat dyed yellow or olive drab No. 7 in accordance with type I of CCC-D-950 or shall be mineral dyed khaki in accordance with type II of CCC-D-950. After-treating of the material shall be in accordance with class B, table II of CCC-D-950 using one of the listed copper-8-quinolinolate treatments.

3.2.2 Sheeting. The basic sheeting shall be dyed olive drab No. 7 in accordance with type I of CCC-D-950. Cotton sheeting shall meet the following minimum requirements, when tested as specified in 4.4.3.

Yarns per inch:

Warp 50
Filling 50

Weight (ounces per square yard) ...3.5

3.2.3 Coated fabric. The basic fabric (see 3.2.2) shall be uniformly coated on one side with neoprene or other suitable synthetic rubber. The finished fabric shall meet the following minimum requirements, when tested as specified in 4.4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

Breaking strength:

Warp .....40 pounds
Filling .....40 pounds

Hydrostatic resistance (Mullen),
(coated side down).....50 pounds per square inch

Weight of coating .....9 ounces per square yard

Weight of finished fabric..12.5 ounces per square yard


3.2.3.1 Adhesion. The surfaces of the coated fabric shall show no signs of adhesion to each other when tested as specified in 4.4.2.1.

3.2.3.2 Tackiness and cracking. The coating on the fabric shall show no signs of tackiness or cracking when tested as specified in 4.4.2.2.

3.2.4 Heating mixture. The chemical heating mixture shall be of the quality and quantity necessary to meet the performance requirements specified herein. Filled pad shall not emit toxic fumes in quantities sufficient to cause harm to a human.

3.3 Construction. The class I chemical heating pad shall consist of an inner case which shall contain the heating mixture and an outer case which shall completely enclose the inner case. The class II refill shall consist of an inner case containing heating mixture. Inner and outer cases shall be in accordance with figures 1 and 2, respectively, except two horizontal rows of the equally spaced holes each shall be acceptable in lieu of the two vertical rows shown in figure 2. The holes shall be of the same size (1/8 plus or minus 1/32 inch diameter) as those in figure 2 and will serve to better ventilate the pad's inner case by having two of the holes in the center area of the outer case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

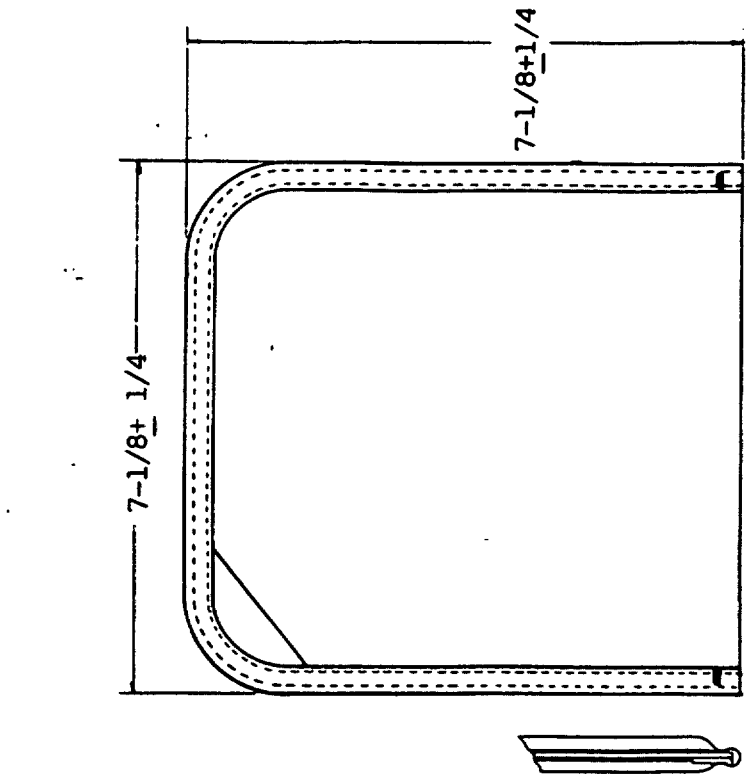

ALTERNATE DESIGN

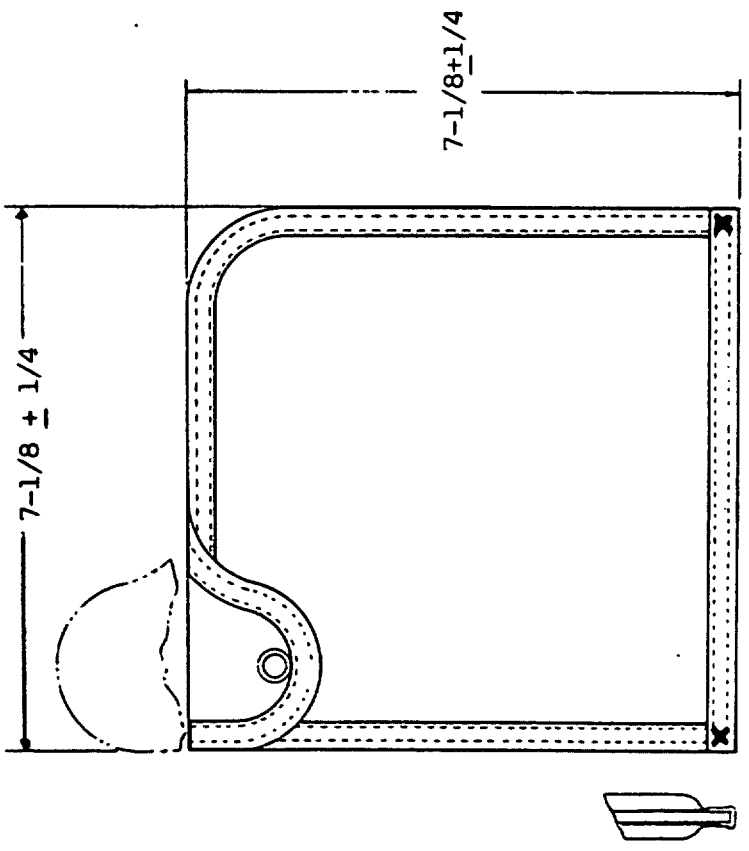


FIGURE 1. Inner case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

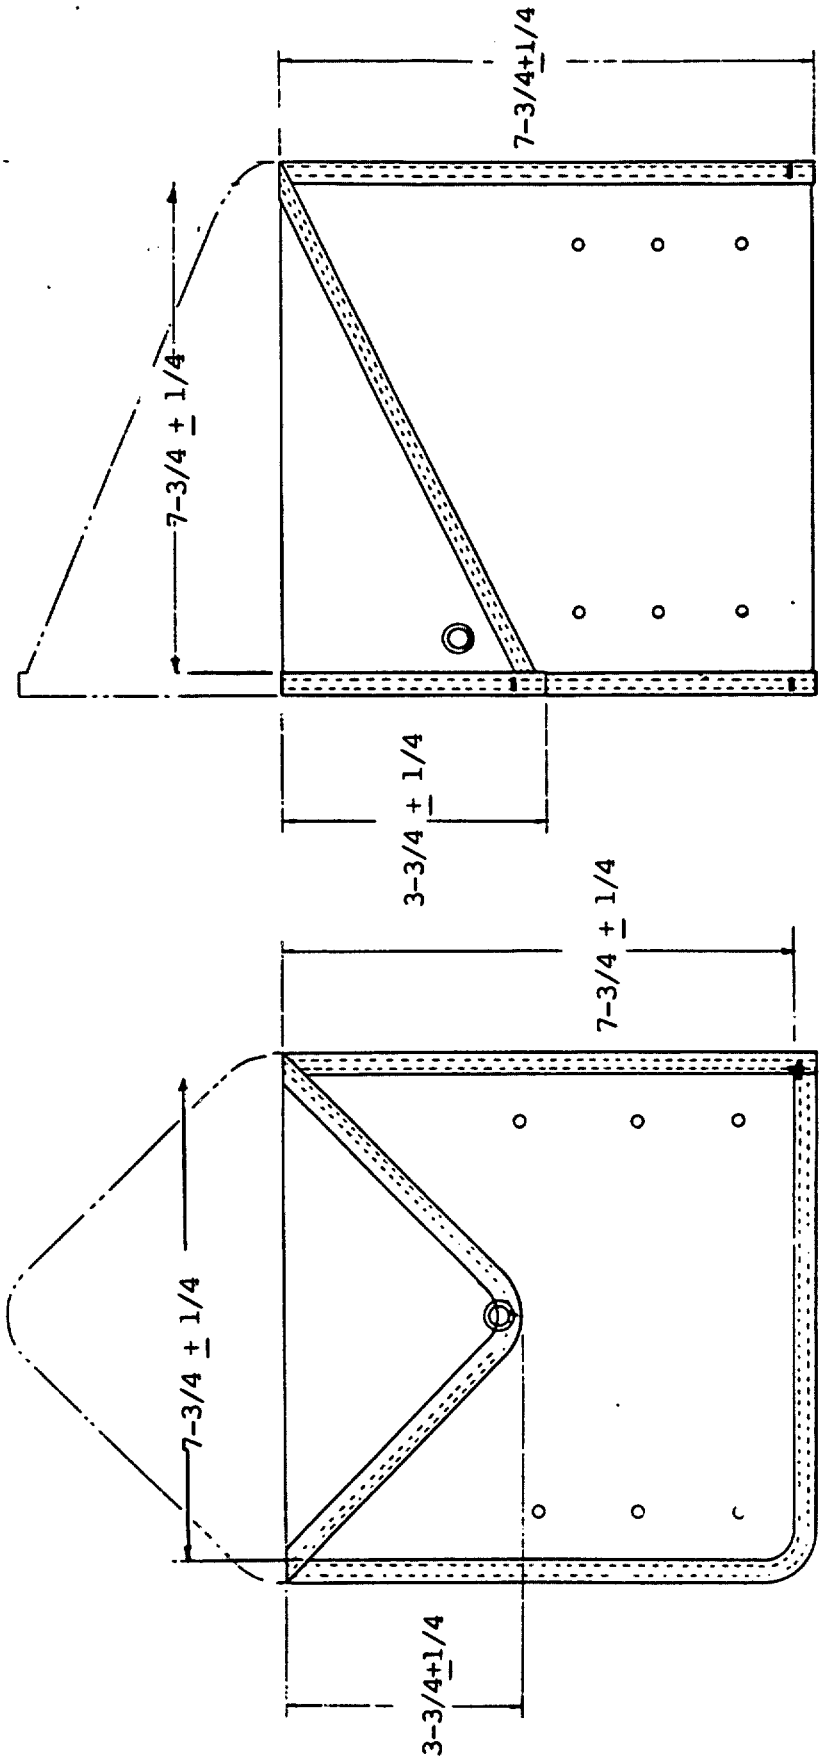


FIGURE 2. Outer case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

3.3.1 Inner case. The inner case shall be made of cotton duck as specified in 3.2.1. Edges shall be bound with cotton tape or bias binding of a matching or harmonizing shade of olive or brown and of adequate strength which shall be attached with double stitching. The inner case shall not permit sifting through of the heating mixture. The case shall be provided with an opening for introducing water, and an adequate means of closing the opening to prevent escape of contents. A nylon fabric or rubber coating on the inside surface of the inner case in the area of the opening only, shall be acceptable. The inner case shall be printed with, at least, the information specified below:

REFILL, CHEMICAL HEATING PAD
NSN: 6530-00-786-4640.

DIRECTIONS

1. CAUTION! - THESE PADS GENERATE TEMPERATURES BETWEEN 110°F AND 190°F AND CAN CAUSE BURNS ON UNPROTECTED SKIN, UNLESS PROPERLY APPLIED.

2. UNSNAP AND SLOWLY POUR TWO TABLESPOONS OF WATER INTO OPENING. VIGOROUSLY SHAKE OR KNEAD UNTIL WARM: THEN PUT INTO POCKET OF OUTER CASE.

3. WHEN THROUGH USING, REMOVE INNER CASE AND SET ASIDE TO COOL AND DRY. CAUTION - NEVER PLACE HOT UNIT ON ANY SURFACE DAMAGED BY HEAT.

4. EACH APPLICATION IS SUFFICIENT FOR APPROX. 8 HOURS OF CONTINUOUS HEAT IF PAD REMAINS COVERED. EACH OF SEVEN SUBSEQUENT USES WILL TAKE A LITTLE LONGER TO REACH HIGHEST TEMPERATURE. ALLOW FOR WARM-UP PERIOD. DO NOT USE EXCESS WATER.

5. TO REHEAT, REPEAT AS DIRECTED ABOVE. CRUSH OR KNEAD OUT ANY LUMPS PRIOR TO ADDITION OF WATER. SHAKE OCCASIONALLY TO KEEP PAD AT HIGHEST TEMPERATURE.

For closures without a snap, Direction 2 above shall read as follows:

1. SLOWLY POUR TWO TABLESPOONS OF WATER INTO OPENING. SHAKE OR KNEAD UNTIL WARM: THEN PUT INTO POCKET OF OUTER CASE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

All variations of wording shall be approved by the contracting officer before application. Lettering shall be legible and permanent, and shall be of sufficient size to permit easy reading of instructions even when the inner case becomes water spotted after one or more uses.

3.3.2 Outer case. The outer case shall be made from coated fabric as specified in 3.2.3. The coated side of the fabric shall be the inner surface of the outer case. The outer case shall be closed on three sides, with the fourth side open and provided with a triangular shaped flap as specified in figure 2. All edges of the case and flap shall be bound with cotton tape, dyed olive-drab No. 7, and secured with a double row of stitching. The free edge of the open side of the case shall be hemmed or bound with tape. A snap fastener assembly located on the flap and the body of the outer case shall be furnished. The snap fastener assembly shall secure the flap to the degree necessary to retain the inner case when the outer case is suspended from two corners of the outer case with the flap end down. The snap fastener assembly shall operate without undue force such as would make opening or closing of the fastener difficult. The flap side of the outer case shall be provided with six ventilation holes. The outer case shall be printed with the following:

Pad, Heating, Chemical NSN: 6530-00-786-4635

REUSABLE - DO NOT DISCARD

For refill, requisition NSN: 6530-00-786-4640,
Refill, Chemical Heating Pad.

3.3.3 Stitching. All stitches on both the inner and outer cases shall be machine stitches conforming to stitch type 301 of Fed. Std. No. 751. The inner case shall be stitched with a minimum of eight stitches per inch, and the outer case shall be stitched with six to eight stitches per inch. When machine stitching is not a continuous thread, it shall be backstitched not less than 1 inch or bartacked at each break. All stitching shall be backstitched or bartacked at the ends.

3.4 Heating requirements. The chemical heating pad or refill, as specified, shall give off heat as a result of a chemical reaction, upon the addition of water. During the heating cycles, the pads shall emit no foreign, pungent odor, other than the characteristic one from the warm coating of synthetic rubber. The pad or refill shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

perform as required in 3.4.1, 3.4.2 and 3.4.3. The chemical heat pad refills shall be tested in outer cases manufactured as specified herein.

3.4.1 Initial temperature. When tested as specified in 4.4.1, the initial temperature for the first reaction cycle shall not be less than 145° Fahrenheit (F). The initial temperatures for each of the succeeding six cycles shall not be less than 120°F. The time to reach the initial temperature shall not exceed 10 minutes after the final agitation.

3.4.2 Minimum temperature. When tested as specified, in 4.4.1, the temperature shall, at no time during the 56 hours of testing, drop below 110°F.

3.4.3 Maximum temperature. When tested as specified in 4.4.1, the temperature shall, at no time during the 56 hours of testing, rise above 190°F.

3.5 Identification marking. The manufacturer's name or registered trademark, and the contract or purchase order number, shall be legibly and permanently marked in black letters on both the inner and outer cases, for the class I pad and the case for the class II refill.

3.6 Workmanship. Heating pads shall be free from defects which detract from their appearance or impair their serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual and auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2.1 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection.
b. Quality conformance inspection.

4.1.2.1.1 First article inspection. First article inspection shall be performed on the pad or refill, as applicable, when a first article sample is required (see 3.1). This inspection shall include examination of 4.3 and test(s) of 4.4.1.

4.1.2.1.2 Quality conformance inspection. Quality conformance inspection shall include the examination of 4.3 and test(s) of 4.4.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the component or material may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer, or supplier, the NSN, the Item Identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

4.2 Sampling. The unit of product for sampling for inspection purposes shall be the pad or refill, as applicable (see 1.2), for end item tests. For the sheeting and coated fabric, an inspection lot size shall be expressed in units of one linear yard of each material and shall consist of all the sheeting and coated fabric received by the pad manufacturer at one time. The sample unit for inspection shall be two linear yards each.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 and table I.

TABLE I. Sampling for examination.

	Inspection level	AQL (percent defective)
For visual examination		
Major defects	II	2.5
Minor defects	II	4.0
For dimensional examination	S-1	6.5

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and table II. The acceptance number shall be zero for material and end item testing.

TABLE II. Sampling for tests.

Component	Characteristic	Requirement	Test procedure	Inspection level
Sheeting	Weight	3.2.2	4.4.3	1/
	Yarns per inch	3.2.2	4.4.3	1/
Coated fabric	Breaking strength	3.2.3	4.4.3	1/
	Hydrostatic resistance	3.2.3	4.4.3	1/
	Weight of coating	3.2.3	4.4.3	1/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

TABLE II. Sampling for tests. - Continued

Component	Characteristic	Requirement	Test procedure	Inspection level
	Weight of finished fabric	3.2.3	4.4.3	1/
	Adhesion	3.2.3.1	4.4.2.1	1/
	Tackiness and cracking	3.2.3.2	4.4.2.2	1/
Pad or refill	Initial temperature	3.4.1	4.4.1	S-2
	Minimum temperature	3.4.2	4.4.1	S-2
	Maximum temperature	3.4.3	4.4.1	S-2

1/ See 4.2.2.1

4.2.2.1 Sheeting and coated fabric. Sampling for the testing of the sheeting and coated fabric shall be in accordance with 4.2.1 and as follows:

Lot size (yards)	Sample Size
80 or less	2
81 up to and including 220	3
221 or over	5

The samples shall be taken from the beginning of each roll.

4.2.2.2 Heating mixture. The test for heating requirements (4.4.1) shall be performed at least once for each lot of heating mixture. An inspection lot shall be all material produced under the same conditions and controlled to the degree that uniformity of product within the designated lot can be assured. Lot identification of the raw material by the manufacturer is one method of control, as cited above, which is considered acceptable.

4.3 Examination. The pads shall be examined to determine compliance with all requirements contained in this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

4.3.1 Classification of defects. Examination shall be conducted in accordance with the following classification of defects as shown in table III. Examination shall not be restricted to the classified possible defects listed below.

TABLE III. Classification of defects.

Categories	Defects
Major:	
101	Inner case perforated, cut, torn, or ruptured.
102	Inner case fabric fails to prevent sifting through of heating mixture.
103	Pad and inner case not complete with all component parts.
104	Bound edges not seamed with a double row of stitches.
105	Stitches not stitch type 301.
106	Stitching at ends not backstitched or bartacked to prevent raveling.
107	Stitching has breaks or improper tension; not suitably repaired by backstitching or bartacking.
108	Instructions for use not present on inner case, legible, permanent, and complete.
109	Rubber coating on outer case shows tack, blisters, cracks, or uncoated areas.
110	Stitching not a minimum of eight per inch on inner case.
111	Outer case shows unauthorized perforations, cuts, tears, or ruptures.
112	Stitching not six to eight per inch, on outer case.
113	Six ventilation holes not present on outer case.
Minor:	
201	Identification marking not present, legible, complete and permanent.
202	Color not as specified.

4.3.2 Inspection of packaging. The sampling and inspection of the preservation and interior package marking shall be in accordance with groups A and B quality conformance inspection requirements of MIL-P-116. The sampling and inspection of the packing and marking for

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

shipment and storage shall be in accordance with the quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

4.4 Tests. Tests shall be conducted in accordance with the applicable material specifications cited in section 3 and as specified herein.

4.4.1 Heating requirements. Heating pads shall be tested for compliance with the heating requirements specified in 3.4 as specified herein.

4.4.1.1 Equipment and condition.

a. Strip chart recorder with one channel for each pad being tested.

b. Type T 30 AWG thermocouples (copper constantan) with each junction crimped to a Thomas and Betts (T & B) No. A-2 terminal or equivalent. The junction shall make mechanical and electrical contact with the bottom of the terminal cavity. One thermocouple assembly shall be used with each pad tested and shall be calibrated to an NBS thermometer prior to the test.

c. A 3 to 3-1/2 pound wool blanket prepared by folding in half twice in the same direction then folding it in thirds in the other direction to give a resultant thickness of 12 layers. The blanket pack shall then be placed in a confined area inside a wood drawer or box. One blanket for each pad being tested is required.

d. Ambient temperature shall be between 68°F and 78°F.

4.4.1.2 Procedure.

a. The heating pad shall be activated by introducing 30 milliliters of distilled or de-ionized water at room temperature into the funnel or opening of the pad. The pad shall be vigorously agitated or kneaded for one minute and then put in its outer case and vigorously agitated for an additional three minutes.

b. The thermocouple shall be attached to the top surface of the pad, at the geometric center, between the pad and the outer case. Method of attachment shall not cover the connector. The pad shall not be folded. The pad assembly shall be placed at the center of the pocket formed

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

by the fourth and fifth layers of the blanket pack.

c. Temperatures shall be continuously recorded on the strip chart recorder over the entire test period of seven hours after final placement in pocket (see paragraph e. below).

d. An initial temperature shall be recorded. This initial temperature is determined when the rate of change in the recorded temperature is 1°F. or less per minute.

e. The pad shall be subjected to six more 7-hour reaction cycles, in between which the pad shall be allowed to cool and dry thoroughly by placing the pad on screening that allows exposure to air on both sides. The procedure shall be the same as for the first cycle, except that after adding water, agitating for 1 minute, placing in the outer case and agitating for a time to be specified by the pad manufacturer for each lot of material submitted for tests, but not to exceed 3 minutes, the pads shall be placed in the blanket pocket for 5 additional minutes for each successive cycle (i. e., second cycle 5 minutes; third cycle, 10 minutes; fourth cycle, 15 minutes) after which the pads shall be removed from the blanket and vigorously agitated for another 3 minutes. The thermocouple shall be attached as described in Procedure b., the pads shall be placed in the blanket again, and the initial temperature shall be recorded.

4.4.2 Temperature resistance of outer case material. The finished material for the outer case shall be subjected to the tests described below.

4.4.2.1 High-temperature resistance. A sample of the material, measuring 2 by 4 inches, shall be folded with the coated side inside and placed between two glass plates under a weight of 1 pound. The specimen and plates with weight applied shall be placed in an oven at 200°F plus or minus 5°F for 2 hours. The specimen shall then be removed from the oven and allowed to cool for 15 minutes. The plates shall then be removed and the specimen examined for adhesion.

4.4.2.2 High-temperature aging resistance. A specimen of the material shall be immersed in boiling water for 1 hour followed by subjection to circulating air at a temperature of 200°F to 212°F for 166 plus or minus 1 hours, and then another 1-hour immersion in boiling water. After this test, the material shall be flexed back and forth

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

several times and shall be visually examined for signs of cracking and tackiness.

4.4.3 Physical properties of outer case material. The outer case material shall be tested in accordance with the following methods described in Fed. Test Method Std. No. 191 to determine compliance with the minimum physical requirements specified in table IV.

TABLE IV. Physical properties of outer case material.

Test	Method
Breaking strength	5100
Yarns per inch	5050
Weight of base and coated fabric	5041
Hydrostatic resistance (coated side down)	5512

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Preservative applications. Preservatives shall not be used.

5.1.1.2 Unit package. Each class I (Pad, Heating Chemical) or each class II (Refill, Chemical Heating Pad) shall be packaged in accordance with MIL-P-116, method IC-1.

5.1.1.3 Intermediate package. Twelve class I pads or twelve class II refills shall be packaged in a box constructed in accordance with PPP-B-636 type CF, class domestic. Closure shall be adequate to prevent accidental opening.

Closure shall be as specified in the applicable box specification.

5.1.2 Level C.

5.1.2.1 Unit package. Preservation for pad shall conform to the requirements of MIL-STD-794 for level C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

5.1.2.2 Intermediate package. Twelve class I pads or twelve class II refills shall be packaged in accordance with the requirements of MIL-STD-794 for level C.

5.2 Packing shall be level A, B or C, as specified (see 6.2).

5.2.1 Level A. Four intermediate packages (48 units) containing class I pads or six intermediate packages (72 units) containing class II refills shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-601, overseas type, PPP-B-621, class 2, or PPP-B-636, class weather-resistant. Closure and strapping shall be as specified in the applicable box specification.

5.2.1.1 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall be as specified in the liner specification. Case liner shall not be required for fiberboard boxes. Each fiberboard box shall be waterproofed as specified in PPP-B-636.

5.2.2 Level B. Four intermediate packages (48 units) class I pads or six intermediate packages (72 units) containing class II refills shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-601, domestic type, PPP-B-621, class 1, or PPP-B-636, class domestic. Closure shall be as specified in the applicable box specification.

5.2.3 Level C. The level C packing for class I pads or class II refills shall be packed in accordance with the requirements of MIL-STD-794 for level C.

5.2.4 Packing variation permitted. If the required number of units to be shipped is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which will insure safe delivery to destination.

5.2.5 Unitized loads. Unitized loads, commensurate with the level of packing specified in the contract or order, shall be used whenever total quantities for shipment to one destination exceed 250 pounds or 20 cubic feet. Loads shall be unitized on pallets conforming to MIL-STD-147. Quantities less than 20 cubic feet need not be unitized. Pallet loads including the pallet shall not

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

exceed 43 inches in length, 52 inches in width, and 54 inches in height.

Pallet shall conform to Type IV or Type V.

5.2.5.1 Levels A and B. Class I pads or Class II refills packed as specified in 5.2.1 and 5.2.2 shall be unitized on pallets as specified in 5.2.5.

5.2.5.2 Level C. Class I pads or Class II refills packed as specified in 5.2.3 shall be unitized as specified in MIL-STD-794.

5.3 Marking.

5.3.1 Civil agencies. Unless otherwise specified, markings for shipment shall be as specified in Fed-STD-123.

5.3.2 Military activities.

5.3.2.1 Level A, B, and C. Each unit pack, exterior container and unitized load shall be marked as specified in MIL-STD-129.

5.4 General.

5.4.1 Exterior container. Exterior container (see 5.2.1, 5.2.2, and 5.2.3) shall be of minimum tare and cube consistent with the protection required and shall contain equal quantities of identical stock numbered items to the greatest extent practicable.

5.4.2 Packaging inspection. The inspection of these packaging requirements shall be in accordance with 4.3.2.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The chemical heating pad is suitable for medical field use where electricity is not available.

6.2 Acquisition requirements.

a. Title, number, and date of the specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

b. Issue if DODISS to be cited in the solicitation and if required, the specific issue of individual documents referenced (see 2.1).

c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

d. Class required (see 1.2).

e. When a first article is required (see 3.1, 4.1.2.1 and 6.3).

6.3 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of 7-104.55 of the Armed Services Procurement Regulation. The contract or purchase order specifies the quantity, procedure for delivery and other specific instructions for inspection and approval of the first article.

6.4 Subject term (key word) listing

Rapid warming pouch
Reusable pouch
Water-activated pouch

6.5 This specification covers the following items appearing in the Federal Supply Catalog and is a replacement for Federal Specification O-P-46E:

National Stock Number	Item Identification
6530-00-786-4635	PAD, HEATING, CHEMICAL
6530-00-786-4640	REFILL, CHEMICAL HEATING PAD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:

Army - MD
Navy - MS
Air Force - 03

Preparing activity:

DoD-MB

Agent: DLA-DM

Civil Agency Coordinating Activities:

VA-OSS
USPHS
FDA-MPQAS

Project No. 6530-2200
Location: PADMIL.11C

*U.S. GOVERNMENT PRINTING OFFICE: 1991--504-034/50174

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given
2. The submitter of this form must complete blocks 4, 5, 6, and 7
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-P-42075	2. DOCUMENT DATE (YYMMDD) 14 February 1991

3. DOCUMENT TITLE
PAD, HEATING, CHEMICAL

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME DEFENSE PERSONNEL SUPPORT CENTER ATTN: DPSC-MSTE	b. TELEPHONE (Include Area Code) (1) Commercial: AC 215-737-2870 (2) AUTOVON: AV 444-2870
c. ADDRESS (Include Zip Code) 2800 SO. 20TH STREET PHILADELPHIA, PA 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 Previous editions are obsolete 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:20Z
Check the source to verify that this is the current version before use.