[INCH-POUND]
A-A-3105
March 12, 1997
SUPERSEDES
DDD-A-616G
January 15, 1970

COMMERCIAL ITEM DESCRIPTION

APRONS, FOOD HANDLER'S

The General Services Administration has authorized the use of this commercial item description by all Federal agencies.

1. SCOPE. This commercial item description (CID) covers washable and reusable food service aprons made from cotton drill cloth.

2. CLASSIFICATION. The aprons shall be of the following types:

Type I - Waist apron, 30 inches (76 cm) long.
Type II - Bib apron, 42 inches (107 cm) long.
Type III - Bib apron, 35 inches (89 cm) long.

3. SALIENT CHARACTERISTICS

3.1 Materials.

3.1.1 Basic cloth. The basic cloth for the aprons shall be 100% cotton drill cloth, 6.0 ounces per square yard (222 g/m^2) minimum, 90 lbs. (400 N) minimum breaking strength in the warp direction, and 55 lbs. (245 N) minimum breaking strength in the fill direction. The cloth shall be bleached white. The cloth weight shall be determined by ASTM D 3776. The breaking strength shall be determined by ASTM D 5034.

3.1.2 Tie tapes. The tape for the neckband and tie tapes shall be cotton. The tape shall be 1/2" inch wide (1.3 cm) minimum, with a breaking strength of not less than 42 pounds (187 N). The tape shall be white to match the basic cloth.

3.2 Construction. All edges of the apron that are not tucked-in selveged shall be hemmed. The finished aprons shall have the dimensions specified by table I. The type II and III, bib aprons, shall have neckbands composed of the tape material specified by 3.1.2, sewn to the apron body. All the aprons shall have either waist loops sewn of tape material that the tie tapes can be tied to, or shall have waist tie tapes attached to the body of 30 inches (76 cm) minimum length each; the placement of the waist loops or tapes shall be as shown by figures 1 and 2. If loops are sewn to the body, two tie tapes of 37 inches (94 cm) minimum length each shall be supplied with the apron, bundled and attached to the apron in some manner. At each attachment point of the neckband and tie tapes or tie loops shall be reinforced by a box stitch or a bartack. The type I apron shall have a waistband formed from self material or the tie tape material; if formed using tie tape material, the tape may be continued out each side to meet the waist tie requirement.

3.4 Workmanship. The aprons shall be clean, neat, with straight seams. The aprons shall not have any defects which may affect appearance, serviceability or durability.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Branch (7FXEE), 819 Taylor Street, Fort Worth, TX 76102

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:30Z
Check the source to verify that this is the current version before use.

Table I, Finished measurements, inches (cm)

Measurement	Type I	Type II	Type III
Overall length	30 (76) min	42 (107) min	35 (89) min
Width	32 (81) min	32 (81) min	26 (66) min
Length of bib	N/A	9 (23) min	8-1/2 (22) min
Width of bib top	N/A	13 (33) min	13 (33) min
Length of neckband	N/A	21 ±1 (53 ±2.5)	21 ±1 (53 ±2.5)
Length of each tie tape			
Integral (clear of apron at each side)	30 (76) min	30 (76) min	30 (76) min
Separate	37 (94) min	37 (94) min	37 (94) min

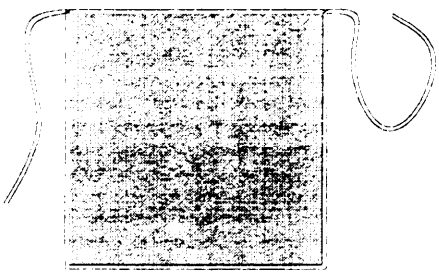


Figure 1

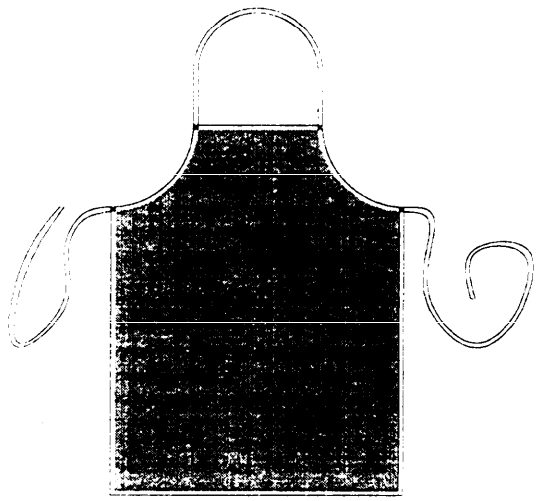


Figure 2

3.5 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within tolerances specified and all other requirements of this document are met.

4. REGULATORY REQUIREMENTS

4.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, shall conform to the producer's own drawings, specifications, standards, and quality assurance practices, and shall be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PACKAGING, PACKING AND MARKING

6.1 Packaging, packing and marking. The packaging, packing, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T08:30Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1 Ordering data. Purchases should select the preferred options permitted herein and include the following information in procurement documents:

a. Title, number, and date of this CID.
b. Type.
c. The packaging, packing and marking desired.

7.2 Referenced documents.

Copies of ASTM standards are available from ASTM, 100 Bar Harbor Dr., West Conshohocken, PA 19428-2959, (610-832-9500).

7.3 Part Identification Number (PIN). This part numbering system is intended for identification and cross-indexing of the item by the government only and does not constitute a requirement for the contractor.

Example: AA3105 / 1
| | |_____ Type (1, 2 or 3)
|
CID A-A-3105

7.4 National Stock Numbers. The following NSNs (with the appropriate part number) are known to use this document:

NSN	Part Number
8415-00-051-1173	AA3105/1
8415-00-634-0205	AA3105/2
8415-01-045-0587	AA3105/3

Preparing Activity:
GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:30Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:30Z
Check the source to verify that this is the current version before use.