DETAIL SPECIFICATION SHEET

SOCKETS, PLUG-IN ELECTRONIC COMPONENTS,
LOW PROFILE, (FOR 22 PIN DUAL-IN-LINE PACKAGES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-83734.

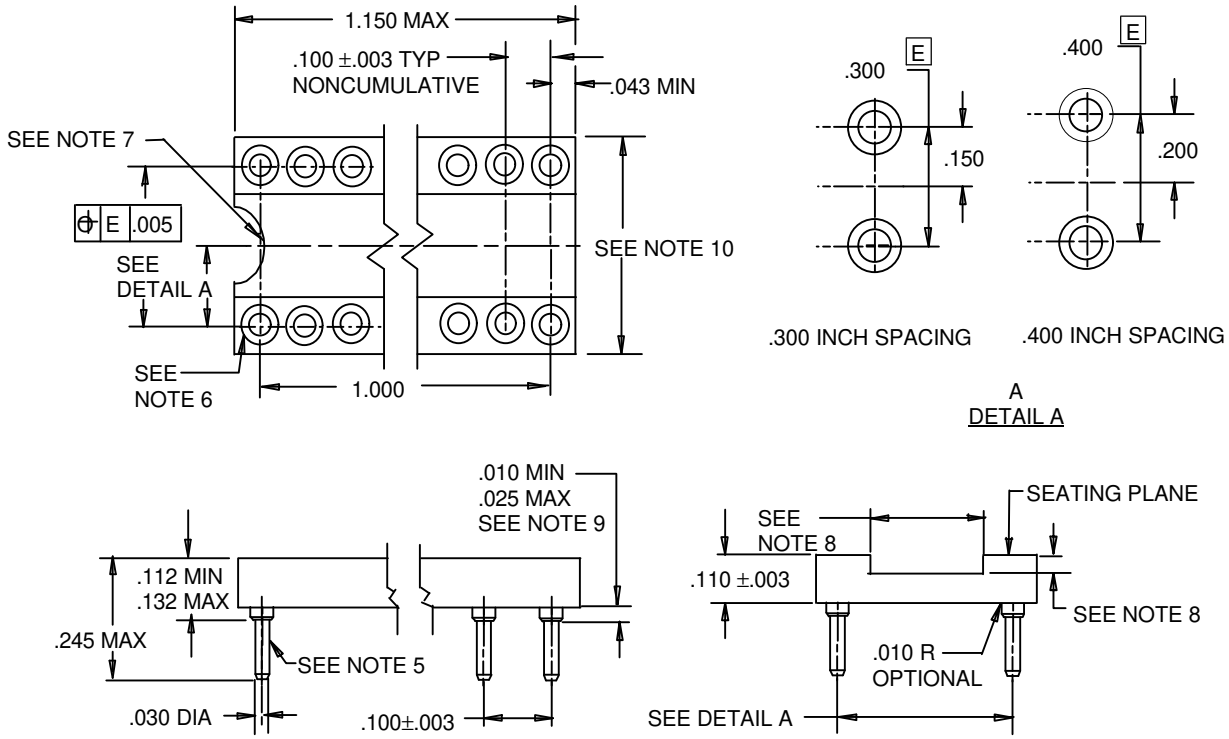

CONFIGURATION 2
(OPEN FRAME)

FIGURE 1. Dimensions and configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:38Z
Check the source to verify that this is the current version before use.

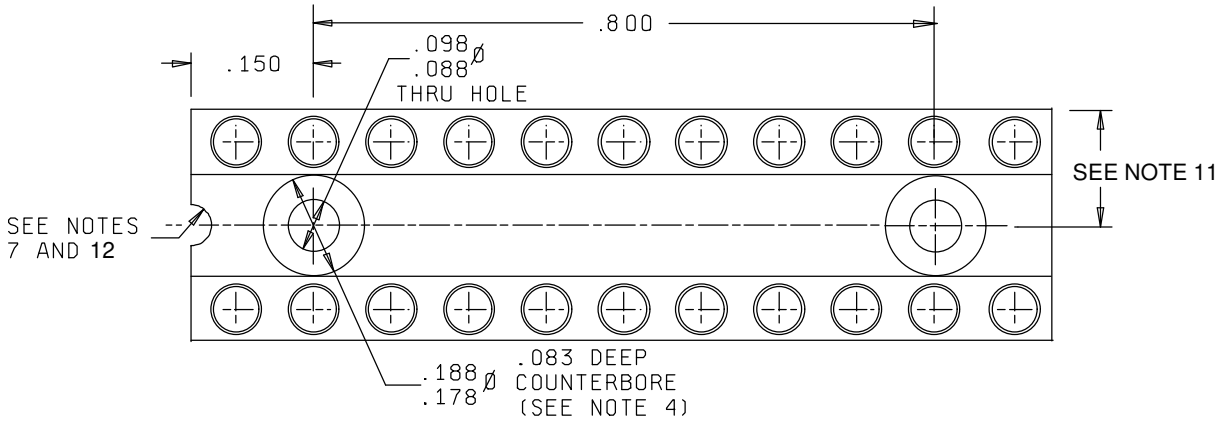

CONFIGURATION 3
SOLID BODY WITH MOUNTING HOLES

Inches	mm	Inches	mm
.003	0.08	.110	2.79
.005	0.13	.112	2.84
.010	0.25	.132	3.35
.025	0.63	.150	3.81
.030	0.76	.178	4.52
.043	1.09	.188	4.78
.045	1.14	.200	5.08
.083	2.11	.245	6.22
.088	2.16	.300	7.62
.098	2.49	.400	10.16
.100	2.54	1.000	15.24
		1.100	27.94

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified tolerances are ±.005 (0.13 mm) inch for three place decimals and ±.01 (0.3 mm) inch for two place decimals.
4. A recess to be provided to fully enclose the head or nut of the fastener below the surface of the socket.
5. PWB hole size .035 ±.003 inch (0.89 ±0.08 mm) solder termination.
6. Devices shall accept flat leads .008 inch (0.20 mm) to .015 inch (0.38 mm) thick by .015 inch (0.38 mm) to .021 inch (0.53 mm) wide. The values for mating forces are based upon the use of standard leads .011 ± .002 inch (0.28 ±0.05 mm) thick by .018 ±.002 inch (0.46 ±0.05 mm) wide. The length of the lead accepted by the device shall be .150 inch (3.81 mm). Contact shall be made at or before reaching a depth of .100 inch (2.54 mm).
7. A visual polarization index shall be provided in the first quadrant. If the visual index overlaps into the fourth quadrant, it shall be adjacent to or clockwise from contact number one.
8. It is desirable that the socket face shall be relieved to facilitate removal of the integrated circuit.
9. Standoffs are either an integral part of the insulator or leads, design optional.
10. Width for .300 inch (7.62 mm) is .400 inch (10.16 mm) max. Width for .400 inch (10.16 mm) is .500 inch (12.70 mm) max.
11. Width for .300 inch (7.62 mm) is .200 inch (5.08mm). Width for .400 inch (10.16 mm) is .250 inch (6.35 mm).
12. All dimensions of configuration 2 are applicable to configuration 3.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figure 1 and table I.

Material and contact finish: In accordance with MIL-DTL-83734.

Terminations Type II: Printed circuit terminal dimensions specified in figure 1 and table I.

Contact identification: See figure 1 and note 7.

Marking:

Part or Identifying Number (PIN): The PIN shall consist of this specification sheet and the dash number from table I.

Example

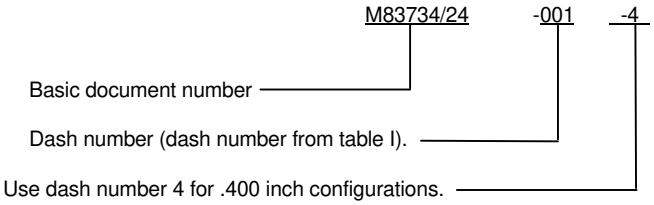

TABLE I. Dash numbers and characteristics.

Dash number M83734/24	Termination type	Contact style	Insulator Configuration	Contact engagement area finish	Termination finish
-001	II	A	2	Gold	Gold
-002	II	A	2	Gold	Tin/lead
-003	II	A	2	Tin/lead	Tin/lead
-004	II	A	3	Gold	Gold
-005	II	A	3	Gold	Tin/lead
-006	II	A	3	Tin/lead	Tin/lead

1/ For replacement purposes, the Government will stock, store, and issue -001, and-004 parts only. (See 6.5 of MIL-DTL-83734.)

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review Activities:
Navy - AS, MC, OS, SH, TD
Air Force - 17, 19, 99

Preparing activity:
DLA - CC

(Project 5935-4183-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:38Z
Check the source to verify that this is the current version before use.