MIL-C-43507B
15 April 1988
SUPERSEDING
MIL-C-43507A(GL)
31 March 1970

MILITARY SPECIFICATION

COAT, WOMAN'S, WOOL, FIELD

* This specification is approved for use by the U.S. Army Natick Research, Development and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers a wool field coat.

1.2 Classification. The coat shall be one type in the following sizes as specified (see 6.2):

Schedule of sizes

8
10
12
14
16
18
20

* Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

* AMSC N/A FSC 8410

* DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:35Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
V-T-276	-	Thread, Cotton
V-T-280	-	Thread, Gimp, Cotton, Buttonhole
V-T-295	-	Thread, Nylon
CCC-C-438	-	Cloth, Buckram, Woven and Nonwoven
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage, (General Use)
DDD-T-86	-	Tape, Textile; Cotton, General Purpose, (Unbleached, Bleached, or Dyed)
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

MILITARY

*	MIL-B-371	-	Braid, Textile, Tubular
	MIL-C-508	-	Cloth, Oxford, Nylon, 3 Ounce
	MIL-C-823	-	Cloth, Serge; Wool, Wool and Nylon, Polyester and Wool
	MIL-C-16375	-	Cloth, Wigan, Cotton
*	MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage, General Specification for
*	MIL-T-43548	-	Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings

Source: https://assist.dla.mil -- Downloaded: 20260-21T21:35Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
* MIL-STD-147 - Palletized Unit Loads
* MIL-STD-731 - Quality of Wood Members for Containers and Pallets

* (Copies of specifications, standards, and handbooks required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of solicitation.

* AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Copies may be obtained from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

* (Copies of drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

* 3.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3, 6.2, and 6.4).

* 3.2 Guide samples. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from the document may appear in the samples, in which case this document shall govern.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:35Z
Check the source to verify that this is the current version before use.

* 3.3 Material. Material shall be as specified herein (see 6.5).

* 3.3.1 Basic material. The basic material shall be 18-ounce wool serge. The color shall be Olive Green Shade No. 108, conforming to type I, class 1 of MIL-C-823.

3.3.2 Lining. The material for the lining shall be 3-ounce nylon oxford, Olive Green Shade No. 106, conforming to type I, class 2, of MIL-C-508 except that the colorfastness to wet-dry cleaning and light shall not apply.

3.3.3 Interlining, reinforcements and stays. The material for interlining coat fronts, collar and collar stand, and for pocket reinforcements shall be cotton buckram, unbleached, white, black, or a color approximating the color of the basic material, conforming to type II, class 1 of CCC-C-438.

3.3.4 Sleeve hem interlining. The material for interlining the sleeve hem shall be cotton wigan conforming to type I of MIL-C-16375.

3.3.5 Stay tapes. The material for staying the seams shall be cotton tape, 1/4 inch wide for armholes and 1/4 or 3/8 inch wide for edge of coat fronts, conforming to type I, class 1, 2, or 3 of DDD-T-86.

3.3.6 Button loop braid. The material for the button loop shall be cotton braid, 1/16 to 1/8 inch wide, dyed to match the basic material and shall show "good" fastness to laundering when tested as specified in 4.4.1.1.

* 3.3.7 Hanger loop braid. The hanger loop braid shall conform to type X, class 1 of MIL-B-371. The color shall match the basic material. As an alternate, the hanger loop may be made from the lining material (see 3.3.2).

3.3.8 Thread and gimp.

* 3.3.8.1 Thread. The thread shall be polyester core conforming to MIL-T-43548, ticket numbers 30-3 ply, 50-3 ply and 70-2 ply for seaming and stitching; 80-2 ply for felling, hand tacking and blind stitching; and 30-3 ply for machine sewn buttons (except automatic machine which sews and shanks).

* 3.3.8.2 Nylon thread. When an automatic machine which sews and shanks (wraps) the button in one operation is used, the thread shall be waxed nylon monocord special No. 5, having a minimum breaking strength of 16 pounds and a minimum length per pound of 2,150 yards and shall be tested for these requirements and for colorfastness (3.3.8.6), in accordance with test methods in V-T-295.

* 3.3.8.3 Cotton thread. The thread for hand sewn buttons shall be type IA3 or IB3, ticket numbers 12-4 ply or 16-4 ply, cotton thread conforming to V-T-276.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

3.3.8.4 Basting thread. Any type basting thread or the cotton thread used for seaming and stitching may be used for basting. A monofilament synthetic thread may be used for those basting operations where the thread is required to be removed, provided the garment is subsequently given a treatment by a drycleaning agent in which the synthetic thread is soluble. When this thread is used, any residue remaining on the garment after the drycleaning process shall be brushed off or removed.

3.3.8.5 Gimp. The gimp for reinforcing the buttonholes shall be cotton No. 8, conforming to type I or II of V-T-280.

* 3.3.8.6 Color and colorfastness. Except for the basting thread, all the thread and gimp shall be Olive Drab Shade No. S-1, C. A. 66022. The dyed thread shall show colorfastness to laundering and light equal to or better than the standard sample. The dyed gimp shall show colorfastness to laundering equal to or better than the standard sample. When standard samples are not available, the dyed thread shall show "good" fastness to laundering and light, and the dyed gimp shall show "good" fastness to laundering.

3.3.9 Buttons. The buttons shall be type II, class D, style 20 or 21, DOD Shade BP, Cable No. 62016, glossy finish, size 24-line for neck closure and 30-line for front closure and shoulder loops, conforming to V-B-871.

3.3.10 Labels. Each coat shall have a size label and a combination identification-instruction label, conforming to DDD-L-20. The laundering requirements of DDD-L-20 shall apply.

* 3.3.10.1 Size label. The size label shall conform to type VI, class 2.

* 3.3.10.2 Combination identification-instruction label. The combination identification-instruction label shall conform to type VI, class 3 except that the identification information shall be inserted above the item descriptions. The body of the instruction shall be as follows:

COAT, WOMAN'S, WOOL, FIELD

Dry Clean
Hand Launder or
Machine Launder following
Formula 11 of TM 10-280,
Field Laundry

3.4 Design. The coat is a semi-fitted box type with a four-piece back, four-piece front, two-piece cuffless sleeves, two breast patch pockets with flaps and two lower patch pockets with flaps, a convertible collar, shoulder loops, and a four-button front closure (see figure 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

* 3.5 Figures. Figures are furnished for information only. To the extent of any inconsistencies between the written document and the figures, the document shall control.

3.6 Patterns. Standard patterns, which show size, directional lines, placement marks, and notches for assembly will be furnished by the Government. The Government patterns shall not be altered in any way and shall be used as a guide for cutting the working patterns. Except as indicated in footnote in table I, the working patterns shall be identical to the Government patterns. The patterns provide a seam allowance of 3/4 inch for joining side seams and center back seam; 3/8 inch for joining shoulders, sleeves, center fronts to side fronts, center backs to side backs, front facing to coat and for setting collar and sleeves; 1/4 inch for all other seams; an allowance of 1-1/4 inches for coat hem and 3 inches for sleeve hem. A 1/2 inch seam allowance is provided for all lining parts, except side seams where a 3/4 inch allowance is provided.

* 3.6.1 Pattern parts. The component parts of the coat shall be cut from materials as specified and in accordance with the number of parts required for the manufacturing process, as shown in table I.

TABLE I. List of pattern parts

Material	Nomenclature	Cut parts
Wool serge cloth	Center front	2
	Side front	2
	Center back	2
	Side back	2
	Front sleeve	2
	Back sleeve	2
	Back neck facing	1
	Top collar	1
	Undercollar	1
	Top collar stand	1
	Undercollar stand	1
	Upper pocket	2
	Upper pocket facing	2
	Lower pocket	2
	Lower pocket facing	2
	Shoulder loop	2
*	Front facing	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

TABLE I. List of pattern parts (cont'd)

Material	Nomenclature	Cut parts
Nylon oxford cloth	Front lining	2
	Center back lining	2
	Side back lining	2
	Front sleeve lining	2
	Back sleeve lining	2
	Upper pocket lining	2
	Lower pocket lining	2
Cotton buckram	Front interlining 1/	2
	Collar interlining	1
	Collar stand interlining	1
	Collar shaper	

1/ Front interlining may be cut in two pieces by cutting along "cut-line" marked on pattern and adding 1/4 inch seam allowance to each part.

* 3.7 *Construction*. The construction shall conform in all respects to the requirements specified in table II and herein.

3.7.1 Stitches, seams, and stitching. Stitch, seam, and stitching types, specified in table II, shall conform to FED-STD-751. Where two or more seam or stitching types are given for the same operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. The edge and top stitching shall be uniformly gaged throughout the garment. Seams required to be worked out, that have a depth between the folds of 1/16 inch or more shall be considered a defect.

* 3.7.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched 1/2 inch minimum except when caught in other stitching or turned under in a hem. Thread tension shall be maintained so that there will be no loose stitching resulting in puckering of material sewn. The lock shall be embedded in the material sewn.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

* 3.7.1.2 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1 inch behind the end of the stitching. 1/

b. Thread breaks, two or more consecutive skipped stitches or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1 inch before the defective area and continue a minimum of 1 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

* 3.7.1.3 Type 401 stitching. Thread tension shall be maintained so that there will be no loose stitching. Both ends of seams or stitching produced with a 401 stitch type, when not turned under the hem or held down by other stitching, shall have a 1/2 to 3/4 inch chain extending beyond each end. The looper (under thread) shall always be on the inside of the coat and on the coat side of the liner. All repairs shall be made in accordance with 3.7.1.2a or 3.7.1.2b. Repairs may be made using 301 stitch type.

* 3.7.1.4 Automatic stitching. Automatic stitching machines may be used to perform any of the required stitch patterns provided the requirements of the stitch pattern, stitches per inch, size and type of thread are met, and at least three or more tying, overlapping or backstitches are used to secure the ends of the stitching.

3.7.1.5 Thread ends. All thread ends that are visible on the finished item shall be trimmed to a length of not more than 1/4 inch.

* 3.7.1.6 Bartacking. Unless otherwise specified, bartacks shall be as specified in table II. Bartacking shall be free of thread breaks or loose stitching.

* 3.7.1.7 Buttonholes. The buttonholes shall be cut first, eyelet-end square-bar type, worked over gimp with the purling on the outside of the coat. The ends of the buttonhole stitching shall be bartacked the width of the bar section catching the ends of the buttonhole stitching and the gimp.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:35Z
Check the source to verify that this is the current version before use.

* 3.8 Repairs. Repairs such as mends, darns, patches or splices are not permitted on the coat.

3.9 Manufacturing operation requirements. The coat shall be manufactured in accordance with operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching to facilitate manufacture is permissible, provided the thread is removed or does not show on the finished coat.

3.9.1 Marking. The component parts of the coat shall be marked, ticketed or bundled to insure a uniform shade and size throughout the garment. Any method of marking may be used except the following:

a. Corrosive metal fastening devices
b. Sew-on tickets
c. Adhesive type tickets which leave traces of paper or adhesive on the material after removal of the tickets

3.9.2 Pressing. All pressing as required in table II shall be performed with a heated pressing iron or machine. Any additional underpressing in permissible.

Source: https://assist.dla.mil -- Downloaded: 20261O-21T21:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut the coat in strict accordance with the patterns furnished. Directional lines shall be placed in the warp direction of the material. The cut parts from the top and bottom ply shall match and conform to the pattern. b. Cut all wool parts of the coat out of the same piece of material, except collar stands, back neck facing, and the undercollar which may be cut from ends. Parts cut from ends shall approximate the shade of the coat. c. Cut lining parts out of the same piece of material, except sleeves which may be cut from ends. Sleeve linings shall match each other in shade. * d. Cut stripping for hanger loop (if the nylon oxford is used) sufficiently wide for the finished loop to measure 1/4 to 3/8 inch wide (see operation 5). e. Cut wigan for sleeve hem interlining on the bias 3-1/2 to 4 inches wide (see operation 11). f. Cut pocket reinforcements on the straight in either the warp or filling direction as follows: For upper pockets - 1-1/2 to 2-1/2 inches by 5-1/2 to 6 inches. For lower pockets - 2 to 2-1/2 inches by 8-1/2 to 9 inches for sizes 8 through 16 and 2 to 2-1/2 inches by 10 to 10-1/2 inches for sizes 18 and 20.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd)						
*	g. Cut (from either nylon oxford or tubular braid) hanger loop of sufficient length to finish as specified in operation 19.						
2.	Replacement of damaged parts.						
	a. Replace at time of cutting any part of the material containing weakening defects, such as a hole, smash, multiple float or loose slub.						
	b. Replace any part damaged, during the manufacturing process, by needle chew, cut, tear, hole or burn. Hole, cut or tear may be corrected by reweaving the fabric, providing the appearance on the outside, or inside of an unlined part of the coat, is not affected.						
3.	Marking.						
	a. Mark, ticket or bundle all parts of the coat and the lining to insure a uniform shade and size throughout the garment.						
*	b. The use of ink pad numbering machine, rubber stamp, or pencil will be acceptable provided the numbers do not show through the outside of the jacket and the numbers are covered by the seam allowance.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Make front interlinings (if two-piece).						
*	Overlap side front on front 1/2 ± 1/16 inch and seam 1/4 inch from edge. The finished interlinings shall conform to the shape and size to the front interlining pattern.	301	LSa-1	4-8	50-3or 70-2	50-3or 70-2	
		or 304	LSa-1	4-8	50-3or 70-2	50-3or 70-2	
5.	Make hanger loop stripping (optional).						
	a. Fold strip (see operation 1d) of material in half lengthwise; turn in raw edges and stitch 1/16 to 1/8 inch from edge. The folded edge may be stitched 1/16 to 1/8 inch from edge.	301	EFp-1	8-12	50-3	50-3	
		or 301	EFp-2	8-12	50-3	50-3	
	-or-						
	b. Superimpose two strips (see operation 1d) of material; turn in the raw edges on each side and stitch together 1/16 to 1/8 inch from edge.	301	EFn-2	8-12	50-3	50-3	
6.	Mark darts on lining back.						
	a. Fold darts, as indicated by marks on pattern and stitch, tapering to nothing 3/4 to 1 inch below drill hole.	301	OSf-1	8-12	50-3	50-3	
	b. Press darts flat with folded edge turned toward armhole.						
7.	Make sleeve lining.						
	a. Join front sleeve to back sleeve.	301 or 401	SSa-1 SSa-1	8-12 8-12	50-3 50-3	50-3 70-2	

Source: https://assist.dla.mil -- Downloaded: 2024-10-21T21:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Make sleeve lining. (cont'd)						
	b. Press seam allowances of top seam toward back and underarm seam toward back; turn sleeve to right side.						
	(This pressing may be omitted)						
8.	Assemble lining and attach combination identification-instruction label.						
	a. Position the combination indentification-instruction label on the right (when worn) front of lining with the left side of the label 1 to 1-1/2 inches from, and parallel with, the front raw edge of lining. The bottom of the label shall be 7 to 8 inches from the bottom raw edge of the lining. Stitch label on all four sides. The stitching shall not be through the label printing.	301	LSbj-1	10-14	50-3	50-3	
	b. Stitch center back parts together with the seam tapered at both ends. The taperings shall start 2-1/2 to 3 inches from end and taper to the notch indicated on pattern.	301 or 401	SSa-1 SSa-1	8-12 8-12	50-3 50-3	50-3 70-2	
	c. Join side backs to center back and fronts to back.	301 or 401	SSa-1 SSa-1	8-12 8-12	50-3 50-3	50-3 70-2	
	d. Join shoulders forming a shoulder pleat on each front as indicated by marks on pattern. The outside folded edge of the pleat shall be turned toward the armhole.	301 or 401	SSa-1 SSa-1	8-12 8-12	50-3 50-3	50-3 70-2	
	e. Press all seams toward back except center back seam.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Assemble lining and attach combination identification-instruction label. (cont'd)						
	f. Set sleeves matching sleeve seams to lining body seams and with the seam allowances turned as specified in operations 7.b and 8.e. The sleeve head may be tension stitched prior to setting.	301	SSa-1 and	8-12	50-3	50-3	
		301	OSa-1	-	50-3	50-3	
9.	Make shoulder loops.						
	a. Fold loop lengthwise and seam.	301 or	SSa-1	10-14	50-3	50-3	
		401	SSa-1	10-14	50-3	70-2	
	b. Shift seam and with the seam spread open stitch around pointed end.	301 or	SSe-2(a)	10-14	50-3	50-3	
		401	SSe-2(a)	10-14	50-3	70-2	
	c. Press the lengthwise joining-seam open.						
	d. Trim point, turn loop, work out point and edge stitch sides and point, 1/4 ± 1/16 inch from edge.	301	OSf-1 and	10-14	50-3	50-3	
		301	SSe-2(b)	10-14	50-3	50-3	
	e. Make a 3/4 to 7/8 inch finished cut-length buttonhole centered (1/4 inch off center tolerance) on the pointed end with the inside edge of the eyelet 1/2 to 5/8 inch from point.	Button-hole		50-56 not including bar	30-3	50-3	
	f. Tack end of buttonholes with 1/4 inch bartack.	Bartack		21 per bartack	50-3	50-3	
	g. Press shoulder loops.						
10.	Make collar.						
	a. Stitch undercollar to undercollar stand.	301 or	SSa-1	10-14	50-3	50-3	
		401	SSa-1	10-14	50-3	70-2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Make collar. (cont'd)						
	b. Press seam open.						
	c. Superimpose the collar interlining and collar stand interlining on the undercollar with the edges of the interlining abutted at joining seam. Stitch interlining to undercollar and stand with two rows of stitching 1/8 ± 1/16 inch from the joining seam.	301 or 401	- -	10-14 10-14	50-3 50-3	50-3 70-2	
*	d. Quilt interlinings to undercollar and stand with the rows of stitching 1/2 to 5/8 inch apart.	103 or 306	SSm-1 SSm-1	4-6 4-6	80-2 80-2	- 80-2	
	e. Press undercollar.						
	f. Mark stitching line on the interlining side of the quilted undercollar with the collar shaper centered and the gorge seam edges of undercollar and shaper even.						
	g. Stitch top collar to top collar stand. Open seam and top stitch with the rows of stitching 1/8 ± 1/16 from the joining seam.	301 or 401 and 301	SSz-3(a) SSz-3(a) SSz-3(b)	10-14 10-14 10-14	50-3 50-3 50-3	50-3 70-2 50-3	
	h. Baste top collar to undercollar allowing fullness in top collar around rounded ends and for roll of top collar over top of undercollar stand.						
	i. Stitch undercollar to top collar along the marked stitching line.	301 or 401	SSa-1 SSa-1	10-14 10-14	50-3 50-3	50-3 70-2	
	j. Trim, turn collar, work out edge and baste around collar edge with two rows of stitching 1/4 to 1 inch apart.	Machine or hand					
	k. Press collar.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Make sleeves.						
	a. Stitch front sleeve to back sleeve from top of sleeve head to bottom of sleeve.	301 or 401	SSa-1 SSa-1	10-14 10-14	30-3 30-3	30-3 50-3	
	b. Press seam open.						
	c. Stitch around sleeve head 3/16 to 1/4 inch from edge with a tension stitch. This operation may be omitted.	301	OSa-1	-	30-3 or 50-3	30-3 or 50-3	
	d. Place wigan (see operation 1e) across sleeve with the bottom edge of wigan 1/2 to 3/4 inch below turn-up notch and stitch to top arm seam allowance and underarm seam allowance.	101 or 301 101 or 301	SSa-1 SSa-1 and LSbj-1 LSbj-1	6-14 6-14 6-14 6-14	50-3 50-3 50-3 50-3	- 50-3 50-3	
*	e. Mark turn-up fold line at bottom of sleeve as indicated on pattern.						
	f. Turn up bottom of sleeve on marked fold-line and press or baste along folded edge.	Hand or machine	EFa-1 EFa-1		comm- ercial		
	g. Remove basting if basted in operation f above.						
	h. Join underarm seam, distributing fullness between notches.	301 or 401	SSa-1 SSa-1	10-14 10-14	30-3 30-3	30-3 50-3	
	i. Press seam open.						
*	j. Blind stitch or stitch top of sleeve hem to sleeve wigan. The stitching shall not be more than 3/8 inch from top of hem. When 301 or 401 stitch type is used, the stitching shall start and finish not more than 1-1/2 inches from each of the sleeve joining seams.	103 or hand or 301 or 401	SSm-1 SSm-1 SSa-1 or SSbd-1 SSa-1 or SSbd-1	4-6 4-6 4-6 4-6	80-2 80-2 50-3 50-3	 50-3 70-2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Make sleeves. (cont'd)						
	NOTE: Operations 11.f and g may be performed after pressing underarm seam (see operation 11.i).						
12.	Make upper and lower pockets.						
	a. Stitch top edge of pocket lining to bottom edge of pocket flap facing, leaving the seam open at center to allow for turning. Seam may be pressed, turning the seam allowance toward bottom of pocket.	301 or 401	SSa-1 SSa-1	10-14 10-14	50-3 50-3	50-3 70-2	
	b. Stitch the pocket lining (with flap facing attached) to pocket piece with flap-to-lining joining seam turned toward bottom of pocket. Turn pocket.	301 or 401	SSa-1 SSa-1	10-14 10-14	50-3 50-3	50-3 70-2	
	-or-						
	c. Eliminate operation a. Superimpose lining on pocket with the seam allowance of lining folded down toward bottom of pocket (seam allowance may be pre-creased or prepressed); superimpose flap facing on pocket with the bottom edge overlapping the top of lining. Stitch flap facing and lining to pocket around outer edge. Turn pocket.	301 or 401	SSa-1 SSa-1	10-14 10-14	50-3 50-3	50-3 70-2	
*	d. Baste around outer edge.	Machine or hand			Comm-ercial		
	e. Edge stitch pocket facing 1/4 ± 1/16 inch from edge; continue the stitching across the top of the lining through all plies, closing the opening.	301	SSe-2(b)	10-14	50-3	30-3	
	f. Press pockets. The two upper pockets shall be uniform and the two lower pockets shall be uniform.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Make back.						
	a. Fold darts as indicated by marks on pattern and stitch, tapering to nothing 3/4 to 1 inch below drill hole.	301	SSa-1 and OSf-1	10-14	30-3	30-3	
	b. Slash darts at top for a distance of 1-1/2 to 2 inches. The top of dart may be cut prior to stitching. Press top of dart open and the folded end toward center back.						
	c. Join the four back pieces, matching notches.	301 or 401	SSa-1 SSa-1	10-14 10-14	30-3 30-3	30-3 50-3	
	d. Press seams open.						
*	e. Sew 1/4 inch tape along armhole from side seam-line to 1 ± 1/4 inch from raw edge of shoulder, holding tape taut to prevent material from stretching.	301 or 401	SSaa-1 SSaa-1	10-14 10-14	30-3 50-3 30-3or 50-3	30-3or 50-3 30-3or 50-3	
	NOTE: Taping of back and front armhole may be done in one operation.						
14.	Assemble fronts.						
	a. Join side fronts to fronts, matching notches and working in bust fullness between notches.	301 or 401	SSa-1 SSa-1	10-14 10-14	30-3 30-3	30-3 50-3	
	b. Press seams open, maintaining shape of fronts.						
	c. Stitch a 1/4 inch tape to armhole from side seam line to 3-1/2 to 4-1/2 inches from raw edge of shoulder.	301	SSaa-1	10-14	30-3	30-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Attach pockets.						
*	a. Center upper pocket reinforcements (see operation 1.f) on underside of assembled fronts over pocket opening marks indicated on pattern; position lower pocket reinforcements with the top edge aligned with front joining seam notches and one side aligned with the side of coat front. Baste reinforcements into position. The basting may be omitted, providing the reinforcements are positioned as indicated after pockets have been attached.	Machine or hand			Comm-ercial		
	b. Stitch pockets to fronts, positioned as indicated by marks on pattern with the top of each pocket horizontal and the front edge of each pocket parallel to the front ends, through reinforcement, with the stitching 1/4 ± 1/16 inch from edge, terminating at the fold line of pocket flap.	301	LSbj-1	10-14	50-3	50-3	
	c. Turn down top of pockets to form flaps and tack each corner with an automatic 1/2 ± 1/8 inch vertical straight tack, or bartack, superimposed on the flap edge stitching. The pocket flaps shall measure 1-3/4 ± 1/8 inches deep for upper pocket flaps and 2 ± 1/8 inches deep for lower pocket flaps.	301 or bartack	- -	28 per tack 28 per tack	50-3 50-3	50-3 50-3	
	NOTE: The size, shape, stitching and alignment of the two upper pockets shall match and the two lower pockets shall match.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Attach interlinings to fronts.						
	a. Position front interlinings on the inside of fronts and with the front edge of interlining and front edge of coat even, stitch around armholes, around neck, down front and across bottom 1/8 to 3/16 inch from edge.	301	SSa-1	6-14	50-3	50-3	
	b. Quilt interlining to fronts at each lapel with not less than four rows of evenly spaced stitching.	103 or Hand or 306	SSm-4 SSm-4 SSm-4	3-4 3-4 3-4	80-2 80-2 80-2	- - 80-2	
17.	Assemble coat.						
	a. Join fronts to backs at sides, matching notches and catching lower pocket reinforcements in the stitching.	301 or 401	SSa-1 SSa-1	10-14 10-14	30-3 30-3	30-3 50-3	
	b. Join shoulders catching the interlining in the stitching.	301 or 401	SSa-1 SSa-1	10-14 10-14	30-3 30-3	30-3 50-3	
	c. Press seams open.						
	d. Tack interlinings to top pocket reinforcements the full width of the reinforcements.	103 or Hand		2-4 2-4	30-3or 50-3 30-3or 50-3		
18.	Attach front facings.						
	a. Stitch neck facing to front facings.	301 or 401	SSa-1 SSa-1	10-14 10-14	50-3 50-3	50-3 70-2	
	b. Press seams open.						

Source: https://assist.dla.mil -- Downloaded: 20261021T21:35Z
Check the source to verify that this is the correct version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
18.	Attach front facings. (cont'd)						
	c. Seam facings to fronts through a 1/4 or 3/8 inch wide stay tape, stitching from lapel notch, across top of lapel, down front and across bottom, turning back the seam allowance at back edge of facing from lower notch to bottom of facing. The stitching may continue around bottom of coat 1 to 1-1/8 inches from bottom edge. Securely catch the button loop braid in the stitching at the top of right lapel. The button loop shall measure 5/8 to 3/4 inch long in the finished coat and shall lay flat against the top of the lapel and the front end shall be not more than 1/8 inch from the front edge of coat.	301	SSab-1	10-14	50-3	50-3	
	d. Press edge seams open.						
19.	Set collar and attach hanger loop.						
	a. Stitch top collar to facing and undercollar to coat, matching the collar ends to lapel notches; catch hanger loop in the stitching at center (1/2 inch off center tolerance) back of top collar stand. The hanger loop shall measure 2 + 1/2 inches long in the finished coat. The collar shall be centered with the ends of the collar uniform and the lapels equal in width. On the finished coat the collar shall completely cover the collarstand.	301	SSa-1	10-14	30-3	30-3	
	b. Press seams open from end to end.						
*	c. Trim lapel points (if necessary); turn facings to right side, work out points and edges, and baste lapel edge, front edges and turned-up bottom edge of coat with two rows of stitching.	Machine or hand			Commercial		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
20.	Set shoulder loops.						
*	Position shoulder loops so that on the finished coat the back edge of loop is 3/4 to 1 inch back of the shoulder seam, the buttonhole opening 1/4 ± 1/8 inch forward from shoulder seams and the point of loop is not more than 1/4 inch from either side of the collar-setting seam. Baste or stitch to edge of armhole.	Hand or machine	SSa-1	6-8	50-3	50-3	
21.	Set sleeves.						
	a. Stitch sleeves to armholes, matching notches, distributing the fullness between the notches and catching the end of each shoulder loop in the seaming. The sleeves shall hang and balance evenly.	301	SSa-1	10-14	30-3	30-3	
		or 401	SSa-1	10-14	30-3	50-3	
	b. Press sleeve seam flat all around armhole shrinking out the fullness in the sleeve head.						
22.	Hem bottom of coat.						
*	Blindstitch top edge of bottom turn-up.	103	EF1-1	4-6	80-2		
		or Hand	EF1-1	4-6	80-2	-	
		or 306	EF1-1	4-6	80-2	80-2	
23.	Attach lining and size label.						
*	a. Stitch lining to coat facings, matching notches, with the center back seam of lining turned to the right or left (see operation 26a) at neck and with the top edge of the size label caught in the stitching at center of back (1/2 inch off center tolerance). The stitching shall not be through the label printing.	301	SSa-1	10-14	50-3	50-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
23.	Attach lining and size label. (cont'd)						
*	b. Baste facings to coat 1 to 2 inches from lining-to-facing joining-seam.	101 or hand			50-3		
*	c. Blindstitch seam allowance of front facings to interlining from not more than 3 ± 1/2 inches from shoulder to 3 ± 1/2 inches from bottom of coat.	103 or Hand	SSm-1	2-4	80-2	-	
			-	2-4	80-2	-	
	d. Tack seam allowance of top collar to seam allowance of undercollar at gorge seams and around neck.	Hand or	-	2-4	30-3or 50-3	-	
		machine	-	6-8	30-3or 50-3	30-3or 50-3	
*	e. Tack lining seam allowances to coat seam allowances as follows:	Hand or	-	2-4	80-2	80-2	
		machine	-	6-8	80-2	-	
	(1) Top sleeve seam - for a distance of 10 to 11 inches, starting 6 to 7 inches from sleeve setting seam.						
	(2) Underarm seam - for a distance of 5 to 6 inches, starting 3 to 4 inches from sleeve setting seam at base of armhole.						
	(3) Across shoulders.						
	(4) Along side seams for a distance of 6 to 7 inches, starting 1 to 2 inches from sleeve setting seam at base of armhole.						
24.	Edge stitch coat.						
	a. Edge stitch coat collar and front edges of coat 1/4 ± 1/16 inch from edge. The edge stitching shall extend across the bottom edges to the back edge of the front facings.	301	SSe-2(b)	10-14	50-3	50-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
25.	Anchor top collar.						
	Anchor top collar to undercollar by stitching the top collar to the undercollar with the line of stitching superimposed on the top-collar-stand-to-collar joining-seam or on either of the rows of top stitching. The stitching shall be 3 to 3-1/2 inches long and shall be centered (1/2 inch off center tolerance). The ends of the stitching need not be backtacked.	301	-	10-14	50-3	50-3	
26.	Tack linings.						
*	a. Fold and baste center back pleat from neck to bottom of lining, with ends of the pleat tapering at the neck and bottom of lining. The outside folded edge of pleat may face toward either the right or left. Direction of center back seam allowance at neck (see operation 23a) will be governed by direction of folded edge of the pleat in this operation.	Hand or machine	-	-		Commercial	
*	b. Tack center back pleat, 10 ± 1/2 inches from neck facing, with not less than three cross stitches.	204	-	-	80-2	-	
	NOTE: Do not catch the basic material in the stitching.						
27.	Fell coat.						
*	a. Turn under bottom of sleeve lining so that the bottom edge is 2 to 2-1/2 inches from the finished bottom of sleeve and fell sleeve lining to sleeve hem.	103 or	SSa-1	6-8	80-2	-	
		Hand or	-	6-8	80-2	-	
		306 or	-	6-8	80-2	80-2	
		314	-	6-8	80-2	80-2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
27.	Fell coat. (cont'd)						
*	b. Turn under bottom of lining and baste to hem of coat with a bellows plait allowing ample space for felling the lining. The bottom edge of bellows plait shall be 1/2 to 3/4 inch from the finished bottom of coat.	Machine or hand	SSa-1				
*	c. Fell lining to coat hem without catching the top ply of the bellows plait.	103 or	SSa-1	6-8	80-2	-	
		Hand or	-	6-8	80-2	-	
		306 or	-	6-8	80-2	80-2	
		314	-	6-8	80-2	80-2	
*	d. Fell back edge of front facings and front ends of lining at bottom of coat.	Hand	SSa-1	6-8	80-2	-	
28.	Make buttonholes on fronts.						
	a. Make four 3/4 to 7/8 inch finished cut length buttonholes on the right front at marks, as indicated on pattern, with the inside edge of the eyelets 3/4 to 7/8 inch from edge of front, except top buttonhole which shall be aligned with the lower three.	Buttonhole	-	50-56 not including bar	30-3	50-3	
*	b. Tack end of buttonholes with 1/4 ± 1/16 inch bartack.	Bartack	-	21 per bartack	50-3	50-3	
29.	Clean coat.						
	a. Trim all ends of stitching and remove loose threads.						
	b. Remove all bastings.						
	c. Remove spots, stains and shade tickets.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
30.	Press coat. a. Press entire coat removing gloss, wrinkles and impressions. Press edges flat. If fronts are not pressed on a right and left front pressing machine, manipulate fronts during pressing to maintain the shape. Roll press sleeves. Do not crease lapels or collar breakline. Press lining. b. Brush coat and hang on hanger or place on form until thoroughly dry.						
31.	Attach buttons.						
*	a. Mark the location for the buttons on the left front to correspond with the four buttonholes and the button loop at neck. The center of the three lower buttons shall be 1 to 1-1/8 inches from front edge and the top button shall be 1-1/4 to 1-3/8 inches from front edge. Sew four 30-line buttons, as marked, on left front, and a 24-line button on left front to correspond with the lapel button loop. The ends of the collar shall meet when the button and loop are fastened. The buttons shall be sewn through the facing.	301 or 101 or Hand or 801 (see figure 3)	- - - -	14-16 per button 14-16 per button 4 per button 7 (min)1 deep set per button	30-3 30-3 12-4or 16-4 4 nylon	30-3 30-3 - -	
*	b. Sew a 30-line button on each shoulder through all plies to correspond with eyelet of the buttonhole in shoulder loop. The shoulder loops shall lay flat when buttoned with the button resting in the button-hole eyelet.	301 or 101 or Hand or 801 (see figure 3)	- - - -	14-16 per button 14-16 per button 4 per button 7 (min)1 deep set per button	30-3 30-3 12-4 or 16-4 4 nylon	30-3 30-3 - -	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
31.	Attach buttons. (cont'd) c. Hand sewn buttons shall be shank wrapped four times and the ends of the thread shall be securely tacked with not less than two stitches. Machine sewn buttons shall be shanked with a minimum of ten wraps with three locking stitches.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

* 3.10 Finished measurements. The coat shall conform to the finished dimensions in table III. The tolerance for all measurements shall be ± 1/2 inch.

* TABLE III. Finished measurements in inches

Size	8	10	12	14	16	18	20
Cross back	14-1/2	14-3/4	15-1/8	15-1/2	16	16-1/2	17
Half waist	17	17-3/4	18-1/2	19-1/4	20	21	22-1/8
Back length	24-1/4	24-1/2	24-3/4	25	25-1/4	25-1/2	25-3/4
Sleeve length	22-3/4	23	23-1/4	23-1/2	23-3/4	24	24-1/4

3.10.1 Method of measuring. The coat shall be buttoned, placed flat upon a table, and measured from folded edge to folded edge unless otherwise indicated:

Cross back: 4-1/2 inches below collar-setting seam, from armhole seam to armhole seam. (May be measured on form.)

Waist: Midway between the two lower buttons.

Back length: Along center back seam from collar-setting seam to bottom of coat.

Sleeve length: Down top seam from sleeve-setting seam to bottom of sleeve.

* 3.11 Workmanship. The finished coat shall conform to the quality of the product established by this document. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:35Z
Check the source to verify that this is the currentversion before use.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

* 4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for assuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

* 4.1.3 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

* 4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3)
b. Quality conformance inspection (see 4.4)

* 4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.3 and 4.4.4. The presence of any defect shall be cause for rejection of the first article.

* 4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

* 4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced documents, unless otherwise excluded, amended, modified or qualified in this document or applicable purchase document.

* 4.4.1.1 Testing of braid (button loop) component. Testing shall be performed on the braid for the characteristics listed in table IV. Wherever applicable, tests shall be conducted in accordance with methods prescribed in FED-STD-191. When the data in the "Determinations per sample unit" and the "Results reported as" columns are not specified in the table, they shall be as required by the referenced test method. The lot shall be unacceptable if one or

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:35Z
Check the source to verify that this is the currentversion before use.

more sample units fail to meet any test requirement specified. The sample unit for testing the button loop braid (see 3.3.6) shall be 1/3 yard. All test reports shall contain the individual values utilized in expressing the final result. The sample size shall be as follows:

Lot size	Sample size
800 or less	2
801 to 22,000 inclusive	3
22,001 and up	5

* TABLE IV. Braid (button loop) tests

Characteristic	Requirement paragraph	Test method	Determinations per sample unit	Results reported as
Material identification	3.3.6	1200	-	1/
Width	3.3.6	5020	1	Pass/Fail
Colorfastness: -laundering	3.3.6	5610	-	-

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for this requirement.

* 4.4.2 In-process inspection. Inspection of sub-assemblies shall be made to ascertain that construction details which cannot be examined in the finished product are in accordance with specified requirements. The Government reserves the right to exclude from consideration for acceptance, any material or service for which in-process inspection has indicated nonconformance.

* 4.4.3 End item visual examination. The end items shall be examined for the defects listed in table V. The lot size shall be expressed in units of coats. The sample unit shall be one coat. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects, 15 for major and minor A combined defects, and 25 for total (major and minor combined) defects.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:35Z
Check the source to verify that this is the current version before use.

* TABLE V. End item visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Pressing	Omitted	X		
	Burned or scorched	X		
	Gloss, wrinkles, creases, or thread, basting,or ticket impressions			X
	Seam(s) not pressed open (unless otherwise specified)		X	
	Edge(s) bulky (not pressed solidly)		X	
	Lapel(s), sleeve(s) or collar breakline creased		X	
	Any seam not pressed in the direction specified or fullness in sleeve head(s) not pressed out		X	
	Lining not pressed			X
	Darts not pressed flat on outside			X
	Armhole(s) stretched			X
Material defects and damages	Hole, cut, tear or needle chew:			
	On outside:			
	-any	X		
	On inside:			
	-up to 1/8 inch (inclusive)			X
	-more than 1/8 inch		X	
	Visible mend, darn or patch:			
	On outside:			
	-any	X		
	On inside:			
	-up to 1/4 inch (inclusive)			X
	-more than 1/4 inch		X	
	Pulled threads in lining material			X

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:35Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Materials defects and damages (cont'd)	Weakening defects:			
	Smash	X		
	Multiple float or loose slub:			
	-on outside	X		
	-on inside		X	
	Permanent crease in cloth (when caught in seam)	X		
	Unsightly slub or shade bar:			
	-on outside	X		
	-on inside		X	
Shaded parts	Outside part, except undercollar or undercollar stand, shaded	X		
	Lining shaded (except sleeves)			X
	Lining sleeves not matching each other in shade			X
Cleanness	Spot or stain clearly noticeable:			
	-on outside	X		
	-on inside			X
	One or more shade tickets not removed			X
	Any shade marking visible on outside	X		
	Thread ends not trimmed, or loose threads not removed			X
	Basting thread visible			X
	Residue of soluble basting thread not removed			X
Component and assembly	Any component part or required operation omitted (unless otherwise classified herein)	X		
	Any component not as specified	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Cutting	Any component part not cut in conformance with directional lines indicated on patterns or not cut in accordance with specification requirements	X		
Seams and stitching	Accuracy of seaming: Seam or component part twisted, puckered or pleated (unless otherwise indicated herein)	X		
	Stitching irregular			X
	Part of material caught in unrelated operation or stitching: -up to a distance of 1/4 inch (inclusive)		X	
	-for a distance greater than 1/4 inch	X		
	Ends of stitching when not caught in other seams or stitching backtacked less than 1/2 inch		X	
	Stitching overlapping the end(s) of thread break less than 1 inch			X
	Ends of a continuous line of stitching overlapped less than three stitches on combination indentification-instruction label, or less than 1 inch on all other stitching			X
	Ends of hand felling not securely tacked (tacked with less than three stitches)			X

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:35Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	Gage of stitching and seam allowances: Irregular, i.e. unevenly gaged or corresponding stitchings not uniformly gaged (to be scored only when condition exists along major portion of seam)		X	
	Width not as specified or not within range of gage specified or varies more than 1/16 inch when no range is specified			X
	Stitches broken or missing (except buttonholes): Joining seams, edge stitching and top stitching: -up to 1/4 inch (inclusive)			X
	-more than 1/4 inch but not more than 1/2 inch		X	
	-more than 1/2 inch	X		
	Cross stitching on lining: -insecurely tacked or incomplete			X
	Hand felling: -up to 1/2 inch but not more than 3/4 inch			X
	-more than 3/4 inch		X	
	Machine felling: -1 inch or more		X	
	Skipped stitches: -1/4 inch to 1/2 inch long			X
	-more than 1/2 inch long		X	
	Runoffs: -1/4 inch to 1/2 inch long			X
	-more than 1/2 inch long		X	

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:35Z
Check the source to verify that this is the currenversion before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	Raw edge: -more than 1/4 inch long			X
	Seam and stitch type: -seam type or stitch type not as specified			X
	Stitches per inch (to be scored only when condition exists on major portion of seam or stitching): -more than maximum specified			X
	-less than minimum specified		X	
	Stitch tension (except straight tacks or bartacks): Loose tension resulting in a loose seam	X		
	Loose tension (exposed loops of top or bottom threads): -1/4 to 1/2 inch in length (inclusive)			X
	-more than 1/2 inch		X	
	Tight tension (stitches break when strain is applied in the direction of the seam or stitching)	X		
Buttonholes	Gimp omitted		X	
	One or more broken or skipped stitches in buttonhole(s)		X	
	Uncut buttonhole(s)			X
	End not securely barred on one or more buttonholes		X	
	Stitches not securely caught in fabric (stitches can be pulled away from fabric)	X		
	Cut length less than 3/4 or more than 7/8 inch long		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Buttonholes (cont'd)	Inside edge of eyelet of front buttonhole(s) less than 3/4 or more than 7/8 inch from edge except top buttonhole			X
	Top buttonhole not vertically aligned with the three lower ones by more than 1/8 inch			X
	Front buttonholes unequally spaced by more than 1/2 inch			X
	Inside edge of eyelet of shoulder loop buttonhole(s) less than 1/2 inch or more than 5/8 inch from point			X
	Shoulder loop buttonhole more than 1/4 inch off center			X
Buttons	One or more missing, broken or insecure		X	
	One or more not shanked			X
	Not specified type, size or color			X
	Center of top button less than 1-1/4 or more than 1-3/8 inches from front edge			X
	Center of any of the three lower buttons less than 1 or more than 1-1/8 inches from front edge			X
	Stitching not locked at end of cycle (tug at loose end of thread to determine if it will ravel)			X
Labels	Size or combination identification -instruction label missing, incorrect or illegible	X		
	Stitching through the printing			X
	Not positioned as specified			X
	Combination identification-instruction label not stitched on all four sides			X

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:35Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Outside coat	Right and left front uneven in length when the right and left front are superimposed:			
	-more than 1/2 inch but not more than 3/4 inch		X	
	-more than 3/4 inch	X		
	Right and left front uneven in length when coat is buttoned:			
	-1/8 inch to 1/4 inch (inclusive)			X
	-more than 1/4 inch		X	
	Front edge(s) stretched, irregular, curved out at bottom, or facing exposed beyond front edge for a distance of more than 1 inch		X	
	Fullness between edge stitching and edge of fronts, collar, shoulder loops and pocket flaps			X
	Seam not worked out to edge along front edge(s), collar edge, and pointed end of shoulder loop(s) having a depth between folds of 1/16 inch or more		X	
	Collar ends spread apart more than 1/2 inch or overlapped when coat is buttoned		X	
	Any tacking or blind stitching exposed on outside of coat			X
	Button(s) and buttonhole(s) or top button and buttonhole loop not aligned causing noticeable bulge or twist when coat is buttoned		X	
	Button(s) not stitched through facing		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Pockets	Pockets out of horizontal alignment or top of one or more pockets not horizontal by:			
	-1/4 inch to 1/2 inch (inclusive)			X
	-more than 1/2 inch		X	
	Pocket(s) not parallel to front edge of coat by more than 1/4 inch			X
	The two upper pockets or the two lower pockets not uniform in shape or size		X	
	Tack(s) or bartack(s) omitted at each corner of pocket opening		X	
	Tack(s) or bartack(s) not positioned as specified			X
	Tack(s) or bartack(s) not through flap, pocket and coat		X	
	Loose tension on tack(s) or bartack(s)		X	
	Upper pocket flap(s) less than 1-5/8 inches or more than 1-7/8 inches deep			X
	Lower pocket flap(s) less than 1-7/8 inches or more than 2-1/8 inches deep			X
	Top of pocket tight (does not lie flat)		X	
	Lining exposed beyond edge of pocket			X
	Felling stitches through pocket lining restricting use of pocket	X		

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:35Z
Check the source to verify that this is the currentversion before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Bottom edges	Blind stitching or tacking exposed on outside of coat			X
	Lining exposed below bottom of coat			X
	Bottom edge irregular			X
Collar	Short, causing puckers on fronts or back	X		
	Long, setting away from neck		X	
	Undercollar exposed along collar edge for more than a distance of 1 inch		X	
	Edge irregular		X	
	Ends not uniform, i.e., varying in length by more than 1/4 inch		X	
	Tacking of collar to neck of coat omitted or insecure		X	
	Stitching anchoring top collar to undercollar:			
	-not superimposed on collar-stand-to-collar joining-seam or on one of the rows of top stitching			X
	-off center by more than 1/2 inch			X
	-less than 3 or more than 3-1/2 inches long			X
	Top collar or undercollar tight, causing edges to curl		X	
	Collar, undercollar, collar stand or undercollar stand twisted or excessively full		X	
	Under collar exposed below bottom edge of collar	X		

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:35Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Fronts	Fullness or twist on outside of coat		X	
	Front facing(s) twisted	X		
	Front facing(s) excessively full			X
	Fullness on facing(s) between buttonholes, between buttons, or between front edge of coat and buttonhole(s) or front edge of coat and button(s)			X
	Button loop omitted or insecure		X	
	Button loop less than 5/8 or more than 3/4 inch long		X	
	End of button loop more than 1/8 inch from the front edge of lapel or loop not flat against top of lapel			X
	Lapel(s) poorly shaped or not uniformly shaped			X
	End of lapel(s) twisted or curled			X
Backs	End of dart(s) not properly tapered, causing a bulge			X
	Dart(s) twisted		X	
*	Darts uneven in length by more than 1/2 inch		X	
	Dart(s) turned toward armhole			X
	Fullness or twist on outside of coat		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Sleeves	Armhole seam(s) crooked		X	
	Armhole(s) stretched		X	
	Tape stitching on armhole(s) visible on outside of coat			X
	Tape on armhole(s) too tight, causing puckering		X	
	Sleeve fullnesses at armhole misplaced	X		
	Sleeve(s) tight, i.e., front or back part of sleeve(s) not having roll affect at armhole or causing bulge, break or twist on sleeve(s) at lower part of armhole	X		
	Sleeve lining(s) twisted, short or tight, causing fullness or twist on outside of sleeve(s)	X		
	Underarm seam(s) and side seam(s) staggered more than 1/2 inch		X	
	Shoulder seam(s) and sleeve seam(s) staggered more than 1/4 inch	X		
	Interlining in sleeve hem(s) twisted, tight or pleated, causing ridges or puckers at bottom of sleeve(s)		X	
	Seam allowances of sleeve lining(s) not securely tacked to seam allowances of coat sleeves along top and underarm seams		X	
*	Sleeves unequal by more than 1/2 inch	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Shoulders	Shoulder loop seam(s) on upper side	X		
	Loop(s) when buttoned, does not lie flat with button resting in the eyelet of the buttonhole		X	
	Loop(s) twisted		X	
	Back edge of loop(s) less than 3/4 inch or more than 1 inch in back of shoulder seam or button hole opening less than 1/8 or more than 3/8 inch forward of the shoulder seam			X
	Point(s) of loop(s) more than 1/4 inch from either side of the collar-setting seam		X	
Inside coat (lining)				
Back	End(s) of dart(s) not tapered to a point causing a bulge			X
	Dart(s) twisted			X
	Darts uneven in length by 1/2 inch			X
	Dart(s) turned toward back			X
	Hanger loop omitted or not securely caught in seam		X	
	Hanger loop not specified length			X
	Cross stitches on back pleat positioned less than 9-1/2 or more than 10-1/2 inches from neck facing or stitches caught to basic fabric			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Front	Felling on lower back edge of facing(s) or bottom front end(s) of lining omitted			X
	Raw edge on back lower edge of facing(s) not turned under			X
	Tacking on back edge of interlining insecure or incomplete			X
	Shoulder pleat(s) omitted		X	
	Lining(s) not securely tacked at side seam(s) and shoulder seam(s)			X
Bottom	Top ply of bellows at bottom of lining caught in the stitching for a distance of 1 inch or more			X
	Bottom fold of lining more than 3/4 or less than 1/2 inch from bottom edge of coat but not exposed below bottom of coat			X

* 4.4.4 End item dimensional examination. The end items shall be examined for conformance to the dimensions specified in table III. Any dimension not within the specified tolerance (see 3.10) shall be classified as a defect. Sleeves unequal by more than 1/2 inch shall be classified as a defect. The lot size shall be expressed in units of coats. The sample unit shall be one coat. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

* 4.4.5 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:35Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete sealing or closure of flap, improper taping, loose strapping or inadequate stapling. Bulged or distorted container.
Content	Number per shipping container is more or less than required. Number of coats per intermediate container is more or less than specified. 1/

1/ For this defect one intermediate container shall be examined.

* 4.4.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1, and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

Source: https://assist.dla.mil -- Downloaded: 20260-21T21:35Z
Check the source to verify that this is the current version before use.

* 5. PACKAGING

* 5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A.

5.1.1.1. Folding. Each coat shall be laid back down and a paperboard insert conforming to figure 2 inserted into the coat so as to fit snugly into the collar and shoulders. The buttonhole front shall overlap the button front. The sleeves shall be positioned full length so that the sleeve ends rest over the pockets. The bottoms shall then be folded up over the front so that the folded coat measures not more than 19 by 16 inches.

* 5.1.1.2 Intermediate pack. Five folded coats of one size only, stacked one on another and alternated collar to bottom, shall be placed in an intermediate fiberboard box conforming to style FTC, type CF, variety SW, class domestic, grade 175 of PPP-B-636. Inside dimensions of the box shall approximate 19-1/4 inches in length, 16-1/4 inches in width, and 3-3/4 inches in depth. Two ounces of naphthalene flakes shall be uniformly distributed throughout the contents of each box (see 6.2.1). The box closure shall be secured with 3-inch minimum width gummed paper tape conforming to type III, grade B of PPP-T-45, applied at the center of the length opening and extending along the bottom and up the sides at least three inches.

* 5.1.2 Commercial. Coats shall be preserved in accordance with ASTM D-3951.

* 5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2).

* 5.2.1 Level A packing. Twenty coats of one size only, preserved as specified in 5.1 shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A intermediate packs shall be packed flat four in depth within the shipping container. Inside dimensions of each shipping container shall be approximately 21 inches in length, 18-1/4 inches in width, and 17-1/4 inches in depth. The approximate dimensions are furnished as a guide only. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class loads specified (see 6.2). Strapping shall be limited to nonmetalic strapping, except for type II, class F loads.

* 5.2.2 Level B packing. Twenty coats of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A intermediate packs shall be packed flat, four in depth within the shipping container. Inside dimensions of each shipping container shall approximate 21 inches in length, 18-1/4 inches in width, and 17-1/4 inches in depth. Approximate dimensions are furnished as a guide only.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:35Z
Check the source to verify that this is the current version before use.

* 5.2.2.1 Weather-resistant grade fiberboard shipping container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5.

* 5.2.3 Commercial packing. Coats preserved as specified in 5.1 shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), coats packed as specified in 5.2.2 and 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 95 in accordance with appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

* 5.4 Marking. In addition to any special marking required by the contract or purchase order, intermediate packs, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951 as applicable.

6. NOTES

6.1 Intended use. The coat is a component of the field uniform worn by the female military personnel of the Department of the Army.

* 6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number and date of this document.
b. When first article is required (see 3.1, 4.3 and 6.4).
c. Size required (see 1.2).
* d. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
e. Type and class of unit load required (see 5.2.1).
f. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
g. When palletization is required (see 5.3).

* 6.2.1 Naphthalene flakes. The naphthalene flake requirement is not applicable when Government furnished material of wool or part wool content has been mothproof treated (see 5.1.1.2).

* 6.3 Sample. For access to samples, address the contracting activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:35Z
Check the source to verify that this is the currentversion before use.

* 6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

* 6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this document (see 3.3).

* 6.6 Subject term (key word) listing.

Clothing
Coat, woman's

* 6.7 Changes from previous issue. The margins of this document are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content, irrespective of the marginal notations and relationship to the previous issue.

Custodians:

Army - GL
* Air Force - 99

Review activities:


Army - MD
* Air Force - 82
DLA - CT

Preparing activity:


Army - GL

Project No. 8410-A649


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.



COLLAR, CLOSED

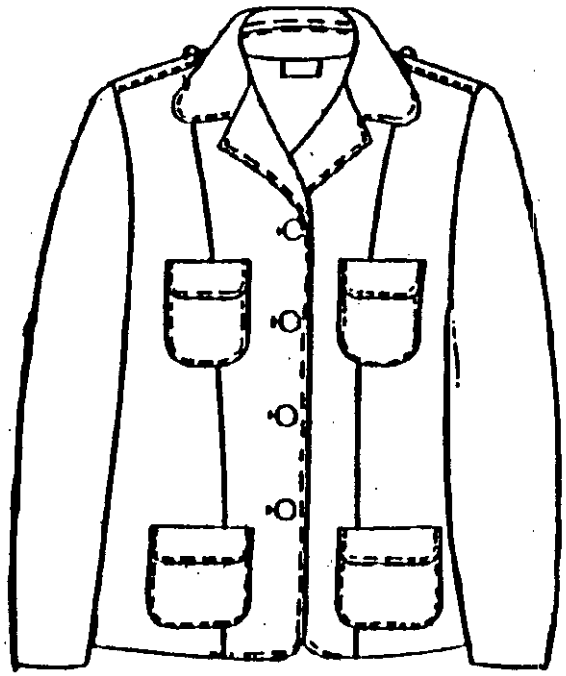

FRONT

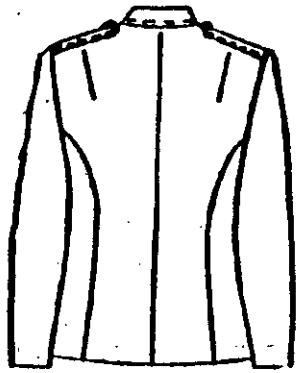


BACK

FIGURE 1 COAT, WOMAN'S, WOOL, FIELD

2-1-768 A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

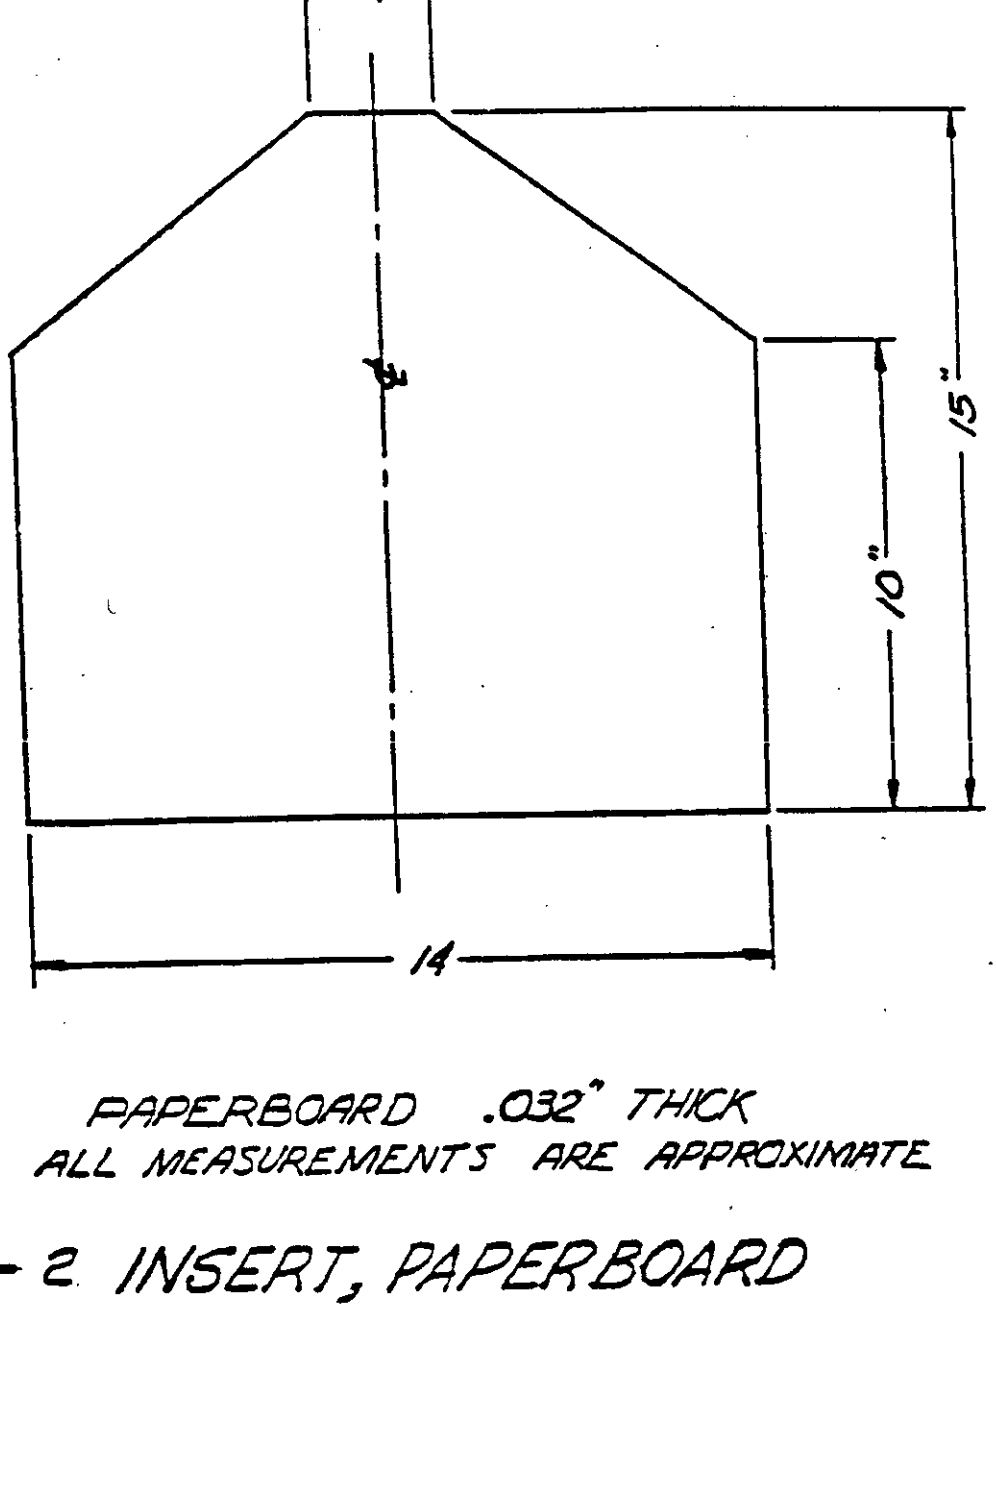

PAPERBOARD .032" THICK
ALL MEASUREMENTS ARE APPROXIMATE

FIGURE – 2. INSERT, PAPERBOARD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:35Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

US Army Natick Research, Development
and Engineering Center
Natick, MA 01760-5014

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

STRNC-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research, Development,
and Engineering Center
ATTN: STRNC-ES
Box 14A
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-43507B	Coat, Woman's, Wool, Field

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-10-21 21:21:35Z
Check the source to verify that the content is current before use.