MIL-S-43502C
5 September 1985
SUPERSEDING
MIL-S-43502B
24 January 1983

MILITARY SPECIFICATION

SHIRT, WOMAN'S, WOOL, FIELD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers a woman's wool shirt.

* 1.2 Classification. The shirt shall be of one type in the following sizes as specified (see 6.2):

Schedule of sizes

8	16
10	18
12	20
14	

2. APPLICABLE DOCUMENTS

* 2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research and Development Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this docu ment or by letter.

FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
CCC-C-438	-	Cloth, Buckram, Woven and Nonwoven
DDD-L-20	-	Label: For Clothing, Equipage and Tentage (General Use)
PPP-B-566	-	Boxes, Folding, Paperboard
PPP-B-636	-	Boxes, Shipping, Fiberboard
UU-P-268	-	Paper, Kraft, Wrapping

MILITARY

MIL-C-2184	-	Cloth, Flannel, Wool, 10-1/2 Ounce, Shrink Resistant
MIL-T-43548	-	Thread, Polyester, Cotton-Covered and Rayon-Covered

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-1492	-	Provisions for Evaluating Quality of men's Shirts

(Copies of documents required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 204	-	Sewing Threads, Testing
D 3951	-	Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

COLOR ASSOCIATION OF THE UNITED STATES, INC.

Department of Defense Standard Shades

(Application for copies should be addressed to the Color Association of the United States, Inc., East 38th Street, New York, NY 10016.)

AMERICAN IRON AND STEEL INSTITUTE (AISI)

Type number 304 - Stainless and Heat Resistant Steel
Type number 316 - Stainless and Heat Resistant Steel

(Application for copies of Steel Product Manual should be addressed to the American Iron and Steel Institute, 150 East 42nd St., New York, NY 10017.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from the document may appear in the sample, in which case the document shall govern.

3.2 Materials (see 6.4).

3.2.1 Basic material. The material for the shirt shall be wool flannel cloth, 10-1/2 ounce, Olive Green 108, shrink-resistant, conforming to MIL-C-2184.

3.2.2 Interlining. The material for undercollar interlining shall be buckram cloth, 4.5 ounce, bleached or natural, conforming to type II, class 1, of CCC-C-438.

* 3.2.3 Labels. Each shirt shall have a class 2 size label and either a class 15 combination identification and instruction label or separate class 1 identification and class 3 instruction labels conforming to type VI of DDD-L-20. The labels shall show fastness to laundering. The instruction label or combination label, as applicable, shall include the following information:

Dry Clean; or Launder
by Hand or by Wool
Method Formula II
TM 10-1680A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

3.2.4 Thread. The thread for seaming, stitching the shirt shall be polyester cotton-covered thread, dyed Olive Drab, S-1, CA 66022, ticket No. 50, 2 or 3 ply and ticket No. 70, 2 ply conforming to MIL-T-43548, and shall be utilized as specified in table II.

3.2.5 Buttons. The buttons shall conform to type II, class D, style 20 or 21, 24-line of V-B-871 and shall be Olive Green BP Cable 62016.

3.3 Design. The shirt has a convertible collar with stand, double yoke, two patch pockets with flaps (two horizontal buttonholes in each flap for pencil accommodation), left sleeve pocket with pencil opening, long sleeves with bound opening and straight bottom with side vents.

3.4 Patterns. Standard patterns which provide an allowance of 1/4 inch for joining seams of collar, cuffs, and pocket flaps, and 1/2 inch for all other seams will be furnished by the Government. The standard patterns shall not be altered in any way and are to be used only as a guide for cutting the contractor' working patterns. The working patterns shall be identical to the standard patterns.

3.6.1 Pattern parts. The components parts shall be cut from material specified below in accordance with the pattern parts indicated in table I.

TABLE I. List of pattern parts

Material	Pattern nomenclature	Cut parts
Wool flannel cloth	Front	2
	Back	1
	Yoke	2
	Top collar	1
	Undercollar	1
	Collarstand	2
	Sleeve	2
	Cuff	2
	Pocket	2
	Pocket flap	4
	Sleeve binding 1/	2
	Sleeve pocket	1
Buckram cloth	Undercollar interlining	1

1/ Sleeve binding may be strip cut.

3.5 Construction. The construction shall conform in all respects to the requirements specified in table II and herein. Figure 1 is furnished solely for guidance and information. Should variation from the written document appear in figure 1, the written document shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

3.5.1 Stitches, seams and stitching. All stitches, seams and stitching shall conform to FED-STD-751. The type of seam, stitching and stitches per inch shall be as specified in table II. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, pleats, puckers or open seams occur. When two or more methods of seams or stitches are given for the same operation, any one may be used, Where stitch type 401 is used, the looper (underthread) shall be on the inside of the shirt.

3.5.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched not less than 1/4 inch except where ends are turned under or caught in other stitching. Ends of a continuous line of stitching shall overlap not less than 1/2 inch. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.5.1.1.1 Repairs of type 301 stitching.

a. When thread breaks, skipped stitches, run-offs, or bobbin runouts occur during stitching, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Except for prestitching, thread breaks, or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area and continue a minimum of 1/2 inch beyond the defective area on to the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs the ends of the stitching are not required to be backstitched.

3.5.1.2 Type 401, 101, 502, 503, and 504 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.5.1.1.1a. and b. Thread tension shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the materials sewn. Type 301 stitching may be used to repair 401 stitching.

3.5.2 Bartacking. Bartacking shall be 1/2 $\pm$ 1/16 inch long, 1/8 $\pm$ 1/32 inch wide and shall contain 28 stitches (minimum). Bartacks shall be free from thread breaks and loose stitching.

3.5.3 Buttonholes. The buttonholes shall be the straight cut-after type, clean cut, correctly positioned, with the ends tacked. The buttonholes shall have 5/8 to 3/4 inch cut length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

3.5.4 Automatic stitching. Automatic machines may be used to perform any of the stitch patterns provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met; and at least three tying, overlapping or backstitches are used to secure the ends of the stitching.

3.5.5 Repairs. Repairs such as mends, darns, patches or splices are not permitted on the shirts.

3.6. Manufacturing operations requirements. The shirt shall be made in accordance with operation requirements specified in table II. The contractor is not required to follow exact sequence of operations listed unless otherwise specified. Any additional basting or holding stitches used to facilitate manufacture are permissible provided the thread does not show on the finished shirt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE II.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cut shirt. a. Cut shirt on the face side in strict accordance with patterns furnished which show directional lines, size, shape, placement of pockets, flaps, darts and notches for assembling. The cut parts from the top and bottom ply of the lay shall match the pattern part. b. Cut each shirt from one piece of material except undercollar, under ply of pocket flap, collarstand, sleeve binding and under yoke, which may be cut from ends. Visible parts cut from ends shall approximate the shade of the shirt. c. Cut front with edge of facing on the selvage. d. Cut the interlining for undercollar from cotton buckram cloth.						
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1492 shall be removed from production and replaced with non-defective and properly matched components.						

Source: https://assistdla.mil -- Downloaded: 2020-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Component marking.						
	a. Mark and ticket all components of the shirt except those parts cut from ends to insure correct size, proper assembly and a uniform shade throughout the shirt.						
	b. The use of ink pad numbering machine, rubber stamp or pencil will be acceptable provided the numbers do not show through the outside of the shirt and the numbers are covered by the seam allowance.						
	c. Any method of marking may be used except: 1. Metal fastening devices. 2. Sew on type tickets. 3. Adhesive type tickets which leave traces of adhesive on the material upon removal of the ticket.						
4.	Make collar.						
	Finished appearance. The collar shall finish smooth and flat without puckers, pleats, or raw edges. When closed, both sides and points shall be equal.						
	a. Position interlining to top collar and stitch across top and side edges.	301	SSa-1	10-14	50	50	
	b. Join top stand to top collar and understand to undercollar; spread seams open and top stitch 1/16 to 3/32 inch from each side of joining seams.	301	SSz-3	10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Make collar. (cont'd)						
	c. Join top collar to undercollar across top and side edges; trim points, turn, work out points and raise stitch 3/16 to 1/4 inch from edge.	301	SSe-2	10-14	50	50	
5.	Make pocket flaps.						
	Finished appearance. The pocket flaps shall finish smooth and flat without puckers, pleats or raw edges. The buttonholes shall be clean cut with the stitching securely caught in the fabric and no loose stitching. Raised stitching shall be uniform on sides and bottom.						
	a. Seam bottom and side edges of each flap. Turn, work out points and corners, and raise stitch 3/16 to 1/4 inch along side and bottom edges.	301	SSe-2	10-14	50	50	
	b. Make two horizontal buttonholes in each pocket flap, positioned as indicated on pattern, with the nearest inside edges 2 to 2-1/4 inches apart.	304		50-52 per buttonhole including tacks	50	50	
	c. Make one vertical buttonhole in the center of each pocket flap (1/8 inch off center tolerance permitted) with the nearest inside edge 3/8 to 5/8 inch from pointed end.	304		50-52 per buttonhole including tacks	50	50	
6.	Make cuffs.						
	Finish appearance. The cuffs shall finish smooth and flat without puckers, pleats or raw edges. Cuffs shall measure the same in width on both ends and raised stitching shall be uniform on sides and bottom.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make cuffs. (cont'd)						
	a. Fold cuffs double lengthwise and seam side edges.	301	SSe-2(a)	10-14	50	50	
	b. Turn, work out corners and raise stitch bottom and side edges 1/16 to 3/32 inch from edge with stitching at sides ending 1/2 to 5/8 inch from raw edge of cuff. The stitching may taper off the edges at the ends and need not be backstitched.	301	SSe-2(b) and OSf-1	10-14	50	50	
	- or -						
	c. Raise stitching of cuff may be accomplished when the top position of cuff is joined to the sleeve (see operation 17.b.).	301	SSe-2(b) and OSf-1	10-14	50	50	
7.	Bind sleeve opening.						
	Bind sleeve opening with the raw edges of the binding turned in. Stitch the binding 1/16 to 3/32 inch from edge. Binding shall finish 1/2 ± 1/8 inch wide. The bound edge of the sleeve opening shall be turned to inside at buttonhole end of cuff and caught in the stitching.	301	BSc-1	10-14	50	50	
8.	Make darts.						
	Finished appearance. The darts shall be carefully tapered and finish smooth and flat.						
	Fold and stitch darts at shoulder on front tapering to nothing 1 ± 1/8 inches below drill hole, as indicated on pattern. The inside fold shall finish toward the front.	301	OSf-1	10-14	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Attach pockets.						
	Finished appearance. The pockets shall finish smooth and flat with the front edges parallel with edge of front opening.						
	a. Overedge stitch the top raw edge.	502 or 503	EFd-1	6-10	70	70	
	b. Turn in top edge of pockets as indicated by marks on patterns, turn in side and bottom edges. Position on fronts as indicated by marks on pattern, and single stitch 3/16 to 1/4 inch from edges. The facing shall/ not be caught in the line of stitching.	301	LSd-1	10-14	50	50	
10.	Attach pocket flaps.						
	Position top raw edge of flap 1/2 ± 1/8 inch above pocket opening and single stitch. Turn flap down and raise stitch 3/16 to 1/4 inch from folded edge. The facing shall not be caught in the stitching.	301	LSbk-1	10-14	50	50	
11.	Make and attach sleeve pocket.						
	a. Overedge stitch the top of the pocket.	502 or 503	EFd-1	6-10	7	70	
	b. Turn in top, side and bottom edges, position on left sleeve (as worn), as indicated on pattern, and single stitch 3/16 to 1/4 inch from edges.	301	LSd-1	10-14	50	50	
	c. Place a vertical line of stitching through pocket and sleeve positioned 1 ± 1/8 inches from line of stitching at front edge of pocket.	301	SSv-1	10-14	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Join yoke.						
	a. Form back pleats as indicated on pattern, insert top edge of back between the plies of yoke at bottom (with notches matching) and stitch through all plies. The outside fold of pleats shall face the armhole. The pleats may be stitched into position prior to joining of yoke.	301 or 401	SSq-2(a) SSq-2(a)	10-14 10-14	50 50	50 70	
	b. Turn yoke plies back over their edges and raise stitch 3/16 to 1/4 inch from edge.	301 or	SSq-2(b) SSq-2(b)	10-14 10-14	50 50	50 70	
13.	Join shoulder.						
	Finished appearance. The shoulder seam shall start and finish evenly with the yoke lapped over the front.						
	a. Insert top edge of front between edges of yoke at shoulder and stitch	301 or 401	SSq-2(a) SSq-2(a)	10-14 10-14	50 50	50 70	
	b. Turn yoke plies over their edges and raise stitch 3/16 to 1/4 inch from edge.	301 or 401	SSq-2(b) SSq-2(b)	10-14 10-14	50 50	50 70	
14.	Set in sleeves.						
	Seam sleeves to armholes with double-lapped and double-stitched seams and with the body lapped the sleeves.	301 or 401	LSc-2 LSc-2	10-14 10-14	50 50	50 70	
15.	Hem side vents - fronts and back parts.						
	Finished appearance. The side vents of front and back parts shall be uniform in width and length.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Hem side vents - fronts and back parts. (cont'd)						
	Turn back cut on portion of each side seam and notch the corners diagonally on back part. Turn in side raw edges on the back part and single stitch 1/16 to 1/32 inch from edge through shirt. The hems shall finish 3/8 ± 1/8 inch wide.	301	EFb-1	10-14	50	50	
16.	Join side and sleeve seams.						
	Join side and sleeve seams in one continuous operation with double-lapped and double-stitched seams with fronts lapped on back. Underarm seams shall not be staggered more than 3/8 inch (center to center).	301 or 401	LSc-2 LSc-2	10-14 10-14	50 50	70 70	
17.	Join cuff to sleeve.						
	a. Seam the under part of cuff to sleeve forming pleats, as indicated on pattern. Fold of pleats shall be turned toward opening on inside, and the binding on front edge of opening shall be turned to the inside of the sleeve. The pleats may be stitched into position prior to cuff assembly.	301	SSa-1	10-14	50	50	
	b. Turn in the raw edge of the top part of cuff and stitch 1/16 to 3/32 inch from edge. When alternate operation 6.c. is utilized, the stitching shall continue along side and bottom edge.	301	LSb-1	10-14	50	50	
18.	Set collar and attach size label.						
	Finished appearance. The collar shall be correctly set matching notches. Points of collar shall be even in length.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
18.	Set collar and attach size label. (cont'd)						
	a. Fold facing back at front notch. Insert collar between fronts and facing at collar notch, stitch across step and gorge to a point 3/4 to 1 inch from shoulder seam (notch if necessary). Continue seaming undercollar to shirt.	301	3Sa-1	10-14	50	50	
	b. Turn facing, work out steps. Insert top of facing inside of collar, turn under the unsewn portion of the top collar and stitch to neck 1/16 to 1/8 inch from edge catching the top edge of the size label at center back continue the stitching along the facing folded edge adjacent to or superimposed upon the shoulder seam.	301	LSb-1 and LSD-1	10-14	50	50	
19.	Finish facings and hem bottoms.						
	a. Overedge stitch the selvaged edge of facing, when edge is cut or frayed.	502 or 503	SSa-1	6-8	70	70	
	b. Form a 5/8 ± 1/8 inch bottom hem with raw edge turned in and single stitch 1/16 to 3/32 inch from edge with the stitching continued from bottom edge of hem at front to bottom of hem, and also down the side edges of the vents.	301	EFb-1	10-14	50	50	

Source: https://assist.dla.mil - Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
20.	Attach identification and instruction labels.						
	Center the identification and instruction labels or combination label on left facing (1/4 inch off center tolerance allowed) 2 ± 1/4 inches from bottom hem and stitch along all sides. The stitching shall be through the facing only.	301	LSbj-1	10-14	50	50	
21.	Bartacks.						
	a. Place a vertical bartack at each end of pocket openings. Bartack stitching at front top edges of chest pockets shall not catch the facings.	1/2 inch Bartack		28 per bartack	50	50	
	b. Place a horizontal bartack at the top of each vent opening.	1/2 inch Bartack		28 per bartack	50	50	
	c. Place a diagonal bartack at each top folded end of binding on the inside of sleeves.	1/2 inch Bartack		28 per bartack	50	50	
22.	Buttonholes.						
	Finished appearance. The buttonholes shall be clean cut with the stitching securely caught in the fabric with no loose stitches.						
	a. Make one horizontal buttonhole on right lapel, as indicated on pattern, with the nearest inside edge 3/8 to 1/2 inch from edge of front, and 3/8 to 1/2 inch from edge of lapel step.	304		50-52 per buttonhole including tacks	50	50	
	b. Make four vertical buttonholes on right front of shirt, positioned as indicated on pattern with the inside edges 5/8 to 3/4 inch from front edge.	304		50-52 per buttonhole including tacks	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
22.	Buttonholes. (cont'd)						
	c. Make one horizontal buttonhole in the center (1/4 inch tolerance) of each cuff, with the nearest inside edge 1/2 to 5/8 inch from edge of sleeve opening.	304		50-52 per buttonhole including tacks	50	50	
23.	Sew buttons.						
	a. Sew four buttons on left front through facing to correspond with buttonholes.	301 or		14-16 per button	50	50	
		101 or		14-16 per button	50		
		Hand		4 double thread per button with end tacked	50		
	b. Sew one button on left lapel to correspond with buttonhole. Ends of collar at neck shall not overlap nor be spread more than 3/8 inch (when buttoned).	301 or		14-16 per button	50	50	
		101 or		14-16 per button	50		
		Hand		4 double thread per button with end tacked	50		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
23.	Sew buttons. (cont'd)						
	c. Sew one button on each pocket through hem and one on each cuff to correspond with center buttonhole in pocket flap and cuffs.	301 or		14-16 per button	50	50	
		101 or		14-16 per button	50		
		Hand		4 double thread per button with end tacked	50		
24.	Clean shirt.						
	Trim thread ends to 1/4 inch maximum; remove loose threads, spots, stains, and shade and size markings. Leave unbuttoned for pressing.						
25.	Press shirt.						
	a. Press shirt smooth and flat.						
	b. Button shirt.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished measurements shall conform to table III

TABLE III. Finished measurements (inches)

Size	8	10	12	14	16	18	20	Tolerance
1/2 Bust 1/	18-3/4	19-1/2	20-1/4	21	21-3/4	22-3/4	23-3/4	± 1/2
Sleeve length 2/	23-1/2	23-3/4	24	24-1/4	24-1/2	24-3/4	25	± 1/2
Back length 3/	24-1/2	24-3/4	25	25-1/4	25-1/2	25-3/4	26	± 1/2

1/ The bust shall be measured with shirt buttoned, from folded edge to folded edge at base of armhole.

2/ Sleeve length shall be measured from top edge of shoulder seam to bottom edge of cuff.

3/ The back length shall be measured at center of back from collar seam to bottom edge.

3.8 Workmanship. The finished shirt shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable acceptable quality level.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

4.2.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether construction details which cannot be examined in the finished product are in accordance with specified requirements. This inspection shall include verification that the working patterns conform to the Government pattern in all respects. Whenever nonconformance is noted, corrections shall be made to the items affected and lot in-process. Items which cannot be corrected shall be removed from production.

* 4.2.3 End item visual examination. The end item shall be examined for the defects listed below. The lot size shall be expressed in units of shirts. The sample unit shall be one shirt. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects and 10.0 for major and minor A combined defects, and 25.0 total (major, minor A, and minor B combined) defects.

TABLE IV. End item defects

Defect	Classification Major	Minor A	Minor B
Material defects and damages			
a. Any weakening defect such as a smash, multiple float or loose slub.	X		
b. Cut, tear, mend, burn, needle chew, hole, or exposed drill hole.	X		
c. Ruptured fibers or shade bar.		X	
NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which weakens the fabric or garment or when it is so conspicuously located as to be clearly noticeable. Non-weakening conditions which are inconspicuous shall not be classified as defects.			
Shaded parts			
a. Any shaded part, except undercollar, flap lining, binding for sleeve opening or underply of yoke.		X	
b. Undercollar, flap lining, binding for sleeve opening or underply of yoke badly shaded.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defect	Classification Major	Minor A	Minor B
Cleanness			
a. Any spot or stain on outside.		X	
b. Thread ends not trimmed or loose thread ends not removed from shirt (to be scored only when the condition exists on major portion of shirt).		X	
c. One or more markings not removed.		X	
Component and assembly (unless otherwise specified herein)			
a. Any component part or required operation omitted.	X		
b. Any operation not performed as specified.			X
Cutting			
Any component part not cut in conformance with directional lines indicated on pattern or not in accordance with specified requirements.	X		
Pressing			
a. Burned or scorched.	X		
b. Pressing omitted (entire shirt).		X	
Seams and stitching			
a. Accuracy of seaming:			
1. Seams twisted, puckered, or pleated (unless otherwise classified).		X	
2. Part of garment caught in any unrelated operation or stitching.		X	
3. Ends of stitching not secured as specified.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)			
b. Gage of stitching (on edge or raised stitchings or double rows of stitching on joining seams):			
1. Irregular, i.e., unevenly gaged or corresponding stitchings not uniform (to be scored only when the condition exists on major portion of seam):			
- on collar, flap, and pocket		X	
- on all other parts.			X
2. Beyond range of width specified or varying more than 1/16 inch when no range is specified.			X
c. Any open seam.			
- Up to 1/4 inch, inclusive.			X
- More than 1/4 inch but not more than 1 inch.		X	
- More than 1 inch.	X		
NOTE: One or more broken or two or more continuous skipped or runoff stitches on joining seams constitutes an open seam. On double stitched seams, a seam is considered open when either side is open.			
d. Raw edges:			
1. Any raw edge on the outside (except under pocket flap):			
- 1/8 inch or more but not more than 1/4 inch			X
- more than 1/4 inch but not more than 1 inch		X	
- more than 1 inch.	X		
2. Any raw edge on the inside:			
- more than 1 inch but not more than 2 inches			X
- more than 2 inches.		X	
NOTE: Raw edges are classified as such only when they occur at places where edge is required to be turned under. Raw edges not securely caught in stitching shall be classified as an open seam.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)			
e. Runoffs:			
1. Joining seams - when resulting in an open seam, use "open seam" classification.			
2. Edge or raised stitching (when not resulting in an open seam):			
- up to 1/2 inch			X
- more than 1/2 inch.		X	
f. Seam and stitch type:			
1. Not specified seam or stitch type.		X	
2. Looper thread of 401 stitch type finishing on outside of shirt.	X		
g. Thread tension:			
1. Loose tension on raised or edge stitching, i.e., loosely exposed lower or top thread (to be scored only when the condition exists on major portion of seam).	X		
2. Tight tension (stitches break when normal pull is applied to seam or stitching).	X		
3. Loose tension resulting in a loose seam.		X	
NOTE: Puckering is evidence of tight tension. When puckering is evident, the seam shall be tested by exerting pull in lengthwise direction of seam.			
h. Stitches per inch (to be scored only when the condition exists on the major portion of seam or stitching):			
1. Less then specified:			
- one stitch		X	
- two or more stitches.	X		
2. One or more stitches more than specified.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)			
i. Stitches skipped or broken (on edge or raised stitching when seam is seamed, turned and stitched):			
- up to 1/2 inch			X
- more than 1/2 inch.		X	
Buttonholes (construction)			
a. Buttonhole not securely caught in fabric, causing stitching to pull away from fabric.	X		
b. Cut length less than 5/8 inch or more than 3/4 inch.		X	
c. One or more broken or skipped stitches.			X
d. Not specified type.			X
e. Ragged edges.			X
f. Tacking omitted or loose:			
- one end of one buttonhole			X
- one end of two or more buttonholes		X	
- both ends of one or more buttonholes.	X		
g. One or more omitted or added.	X		
Buttons.			
a. Missing, broken or insecure:			
- one button			X
- two buttons		X	
- three or more buttons.	X		
b. Not specified type, size or color		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defect	Classification Major	Minor A	Minor B
Bartacks			
a. Any bartack omitted.		X	
b. Loose stitching, incomplete or broken.			X
c. Any bartack not in specified location.			X
d. Length or width not as specified.			X
Outside of shirt			
Collar			
a. Collar closure:			
- collar ends at neck edge overlapping or spread more than 1/2 inch when buttoned.		X	
b. Construction:			
Fullness, tightness, twist or pleats on interlining affecting smoothness on outside of top collar.			X
c. Collar attachment:			
Tightness at joining to neckline, causing puckers or pleats on front, back or yoke.		X	
Off center by more than 3/8 inch.		X	
d. Upper collar:			
1. Twisted, i.e., having a diagonal twist.		X	
2. Tight, causing collar to curl.		X	
3. Puckers or fullness		X	
e. Collar edge:			
1. Under-leaf exposed on edge.			X
2. Irregular.		X	
3. Edge not properly forced out, having a fold of 1/8 inch or more.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defect	Classification Major	Minor A	Minor B
Collar (cont'd)			
f. Collar points:			
1. Collar points uneven in length by: - more than 1/4 inch but not more than 1/2 inch		X	
- more than 1/2 inch.	X		
2. Pointed ends bulky, poorly shaped, or not uniform shape or size.		X	
g. Lapel buttonhole and button:			
1. Nearest inside edge of buttonhole less than 3/8 inch or more than 1/2 inch from front edge.			X
2. Nearest inside edge of buttonhole less than 3/8 inch or more than 1/2 inch from lapel step.			X
3. Lapel button misplaced or out of alignment with lapel buttonhole, causing a noticeable bulge or distortion.		X	
Fronts			
a. Construction:			
Fullness or twist on fronts.			X
b. Length of buttoned fronts:			
1. Uneven in length at bottom when buttoned by: - more than 1/4 inch but not more than 1/2 inch			X
- more than 1/2 inch.		X	
2. Uneven in length at neckline when buttoned, by more than 1/4 inch.		X	
c. Alignment of front buttons and buttonholes:			
Out of alignment, causing a noticeable bulge or twist on fronts when buttoned.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defect	Classification Major	Minor A	Minor B
Fronts (cont'd)			
d. Front buttonholes (position):			
1. Inside edges less than 5/8 inch or more than 3/4 inch from front edge.			X
2. Out of vertical alignment by 3/16 inch or more.		X	
3. Unequally spaced by more than 1/4 inch.		X	
e. Front buttons (position):			
1. Out of vertical alignment by 1/4 inch or more.		X	
2. Button stitching not caught through facing.		X	
Pocket and flap			
a. Construction:			
1. Pocket or flap stitched through facing.		X	
2. Side edge of pocket exposed beyond side edge of flap by: - 1/8 inch or more but not more than 1/4 inch - more than 1/4 inch.	X	X	
3. Back corner of flap caught in armhole stitching.	X		
4. Pocket or flap poorly shaped or not uniform shape or size.		X	
5. Fullness or twist on flap.		X	
6. Fullness or tightness at pocket opening.			X
7. Flap underleaf tight or twisted causing edges to curl up.		X	
8. Underply of pocket flaps exposed.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defect	Classification Major	Minor A	Minor B
Pocket and flap (cont'd)			
b. Pencil openings in flaps:			
Nearest inside edges of eyelets less than 2 inches or more than 2-1/4 inches apart.			X
c. Alignment:			
Set on crookedly, i.e., front edge of pocket not parallel with front of shirt by:			
- more than 1/4 inch, but not more than 3/8 inch		X	
- more than 3/8 inch.	X		
d. Flap buttonhole:			
1. More than 1/4 inch off center of flap.			X
2. Inside edge of buttonhole less than 3/8 inch or more than 1/2 inch from pointed end of flap.			X
e. Flap button:			
1. Out of alignment with buttonhole causing pocket to be pulled up, or twisting flap.		X	
2. Not sewn through hem for reinforcement.			X
f. Pockets or flaps out of horizontal alignment by (at any point):			
1. More than 1/2 inch.	X		
2. More than 3/8 inch up to 1/2 inch inclusive.		X	
Yoke (combined			
a. Outside yoke piece twisted.	X		
b. Fullness or puckers on outside yoke piece.		X	
c. Front or backs lapped on yoke.		X	
d. Under-yoke tight, twisted or full, affecting smoothness on outside of shirt.		X	
e. Irregular in width.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defect	Classification Major	Minor A	Minor B
Sleeves			
a. Setting:			
1. Sleeves tight at armhole, causing puckers on front, yoke or back.		X	
2. Sleeves pleated at armhole seam.		X	
3. Sleeves lapped on fronts or back at armhole seam.		X	
b. Construction:			
1. Pleats omitted at bottom edge of sleeve.		X	
2. Fold of pleats not turned toward opening on inside.			X
3. Sleeve opening uneven in length by 1/4 inch or more to top edge of cuffs.		X	
4. Binding on sleeve opening less than 3/8 inch or more than 5/8 inch wide.			X
5. Sleeve puckered or pleated at joining to binding.		X	
6. Ends of armhole seam staggered more than 3/8 inch (center to center).			X
7. Sleeve binding not securely caught in sleeve (opening, i.e., can be easily pulled away.	X		
8. Sleeve binding improperly set, i.e., the bound edge not turned to inside at buttonhole end of cuffs, or the edge at button end of cuff turned to inside.			X
c. Cuffs:			
1. Reversed, i.e., buttonhole on underside and button on top side.	X		
2. End of cuff finished beyond outer edge of sleeve opening by more than 1/8 inch		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defect	Classification Major	Minor A	Minor B
c. Cuffs: (cont'd)			
3. Cuff full or twisted.		X	
4. Cuff lining full or twisted, not affecting smoothness of cuff.			X
d. Cuff buttonhole and button:			
1. Button out of alignment with buttonhole causing a noticeable bulge or twist on either side of sleeve opening when buttoned.		X	
2. Buttonhole off center on cuff by more than 1/4 inch.		X	
3. Inside edge of buttonhole less than 1/2 inch or more than 5/8 inch from front edge of sleeve opening.			X
e. Sleeve pocket:			
Vertical row of stitching that forms pencil opening positioned less than 7/8 inch or more than 1-1/8 inches from the line of stitching at front edge of pocket.			X
Darts			
Ends of darts not properly tapered, causing an unsightly bulge.		X	
Inside of shirt			
Front facing			
a. Fullness, or twisted, not affecting smoothness on outside of shirt.			X
b. Turned-under inner edge not cut with selvage, or selvaged edge not overedge stitched when edge is cut or frayed.		X	
c. Facing not stitched into position at bottom of shirt.			X
d. Facing not caught as specified.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Defect	Classification Major	Minor A	Minor B
Side vents			
Side vents of front and back parts not uniform, in length or width.			X
Bottom hem			
Less than 7/8 inch or more 1-1/8 inches.			X
Labels			
a. Identification and instruction labels or combination label:			
1. Missing, incorrect or illegible.	X		
2. Not sewn on four sides.			X
3. Stitched through front.		X	
4. Off center on left facing by more than 1/4 inch or positioned less than 1-3/4 inches or more than 2-1/4 inches from bottom edge of hem.			X
b. Size label:			
1. Missing, incorrect or illegible.	X		
2. Top edge not completely caught in stitching of collar or off center on back by more than 1 inch.			X

4.2.4 End item dimensional examination. The end item shall be examined for conformance to the dimensions specified in table III. Any dimension deviating from the specified requirement and sleeves uneven in length by 1/2 inch or more shall be classified as defects. The lot size shall be expressed in units of shirts. The sample unit shall be one shirt. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.2.5 Packaging inspection. An inspection shall be made to determine that preservation, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flap, loose strapping, or inadequate stapling. Open and non-continuous heat-sealed seams and closure of polyethylene bag. Omission of vent hole in polyethylene bag. Bulged or distorted container. Alternative closure of polyethylene bag not provided with tuck or reverse flap.
Contents	Number of intermediate packs per shipping container is more or less than required. Number of shirts per intermediate pack is more or less than required. 1/ Size shown on one or more shirts not as specified on shipping container. 1/
Preservation (napthalene flakes)	Improperly applied or missing, when applicable.

1/ For this defect, one intermediate pack from each container in the sample shall be examined.

* 4.4.5 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packing. Each fully buttoned shirt shall be folded to approximate dimensions of 14 by 10 inches, secured with stainless steel (AISI type 304 or 316) pins, tin or nickel plated brass pins, aluminum clips, or plastic fasteners. Each folded shirt shall be uniformly dusted with napthalene flakes (see 6.2.1), and inserted in a snug-fitting flat style clear polyethylene film bag of 0.00125 inch thickness (± 25 percent tolerance). The polyethylene bag shall be formed with heat-sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat-sealed with the heat seal made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap.

* 5.1.1.2 Intermediate packing. Five shirts of one size only, unit packed as specified in 5.1.1.1, shall be packed in an intermediate paperboard box conforming to variety I, group I, style III, type G, class i of PPP-B-566. Inside dimensions shall be 14-1/4 inches in length, 10-1/4 inches in width, and 7 inches in depth.

* 5.1.2 Commercial. Each complete coverall shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2).

* 5.2.1 Level A packing. Thirty shirts of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to grade V2s, style RSC of PPP-B-636. Level A intermediate packs shall be packed flat, two in length, one in width, and three in depth within a shipping container. Inside dimensions of each container shall approximate 21-1/2 inches in length, 14-3/4 inches in width, and 21-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of the container specification except that the inspection shall be in accordance with 4.2.5. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

* 5.2.2 Level B packing. Thirty shirts of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275, of PPP-B-636. Level A intermediate packs shall be packed flat, two in length, one in width, and three in depth within a shipping container. Inside dimensions of each shipping container shall approximate 21-1/2 inches in length, 14-3/4 inches in width, and 21-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification except that the inspection shall be in accordance with 4.2.5. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 Weather-resistant container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636, and closed in accordance with method III as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.2.5.

5.2.3 Commercial packing. Shirts, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), shirts packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means K and L or film bonding means O and P. Pallet patterns shall be #4 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, intermediate packs, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5.4.1 Polyethylene bagged unit packs. Polyethylene bagged unit packs shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

5.4.2 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing and stenciling, a white paper label 5 by 4 inches with the words "MIXED NSN's plainly printed or stamped thereon and under these words shall be legibly printed or stamped the correct quantity and NSN's container therein.

6. NOTES

6.1 Intended use. The shirt is intended for wear as a component for the cold-wet and cold-dry uniform by female military personnel of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

* 6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Size required (see 1.2).
c. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
d. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
e. When palletization is required (see 5.3).

6.2.1 Napthalene flakes. The napthalene flakes requirement is not applicable with Government furnished material of wool or part wool content has bee moth-proof treated.

* 6.3 Samples. For access to samples, address the contracting activity issuing the invitation for bids.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the document (see 3.2).

6.5 Changes from previous issue. The margins of this document are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - NU

Review activities:


Army - MD
DLA - CT

Preparing activity:


Army - GL

Project No. 8410-0598

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

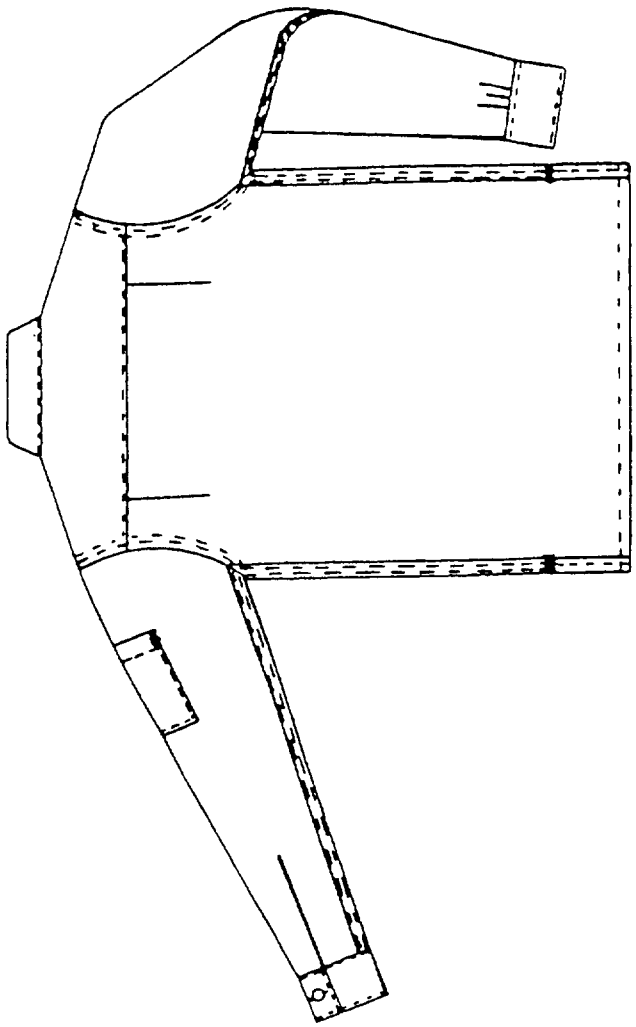

BACK

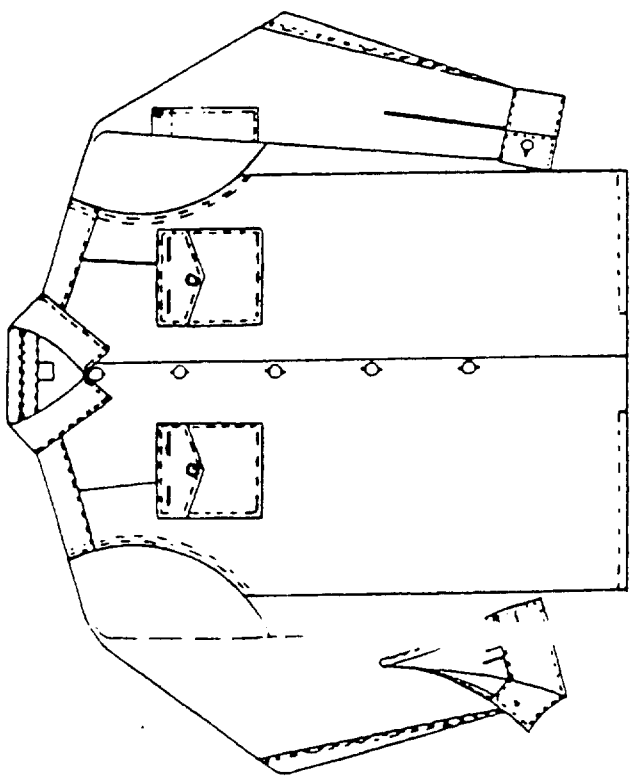

FRONT

FIG. 1 - SHIRT, WOMAN'S, WOOL, FIELD 2-1-7734

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

US ARMY NATICK RESEARCH
and DEVELOPMENT CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research
and Development Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-43502C	Shirt, Woman's, Wool, Field

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OR, 20 Nov 84

Source: https://assist.dla.mil – Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.