MIL-S-43524D(GL)
21 March 1978
SUPERSEDING
MIL-S-43524C(GL)
16 December 1974

MILITARY SPECIFICATION

SLACKS, UTILITY, WOMEN'S, COTTON, OG-107

This specification is approved for use by Natick Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for women's cotton slacks.

1.2 Classification. The slacks shall be one type in the following sizes, as specified (see 6.2).

Schedule of sizes

6 8 10 12 14 16 18 20

2. APPLICABLE DOCUMENTS

* 2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Command, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
V-T-280	-	Thread, Gimp, Cotton, Buttonhole
UU-P-268	-	Paper, Kraft, Wrapping
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-C-342	-	Cloth, Wind Resistant, Poplin, Cotton
MIL-B-17757	-	Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-T-43548	-	Thread, Polyester, Cotton-Covered

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-656	-	Provisions for Evaluating Quality of Slacks, Women's

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for the guidance and information to the contractor (see 6.3). Variations from the specification may appear in the sample, in which case the specification shall govern.

3.2 Material.

3.2.1 Basic material. The basic material shall be cotton poplin cloth, wind-resistant, preshrunk, Olive Green 107 shade, conforming to class A of MIL-C-342.

* 3.2.2 Thread. The thread shall be cotton-covered polyester, ticket Nos. 50 and 70 for seaming, stitching, and buttonholes, and ticket No. 30 for sewing on buttons. The thread shall be Olive Drab S-1, C.A. 66022 and shall conform to MIL-T-43548.

* 3.2.2.1 Colorfastness. The thread shall show colorfastness to laundering, perspiration, and light equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to laundering, perspiration, and light.

3.2.3 Gimp. The cotton gimp for reinforcing buttonholes shall be dyed Olive Drab S-1, C.A. 66022, and shall conform to type I or II, size No. 8 of V-T-280.

3.2.4 Buttons. The buttons shall conform to type II, class D, style 26, 30-line of V-B-871 and shall be Olive Green BP, Cable No. 62016, with a dull finish.

3.2.5 Labels. Each pair of slacks shall have an identification and a size label, or combination size and identification label conforming to type I of DDD-L-20. The fastness to laundering requirements shall apply.

3.2.5.1 Identification label. The identification label shall conform to class 1.

3.2.5.2 Size label. The size label shall conform to class 2.

3.2.5.3 Combination label. The size and identification label may be combined into one label conforming to class 1 and 2 combined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

3.3 Design. Slacks are unhemmed, and have two side patch pockets with bellows and flaps, a waistband with adjustable side button closure and front and back darts at the waistline (see figure 1).

3.4 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.5 Patterns. Standard patterns which provide seam allowances of 1/2 inch (13 mm) for outseams, double needle seams, and pocket turn-in and cut-out; 1/4 inch (6 mm) for pocket flaps; and 3/8 inch (10 mm) for all other seams, shall be furnished by the Government. The standard patterns shall not be altered in any way and are to be used as a guide for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns.

3.5.1 List of pattern parts. The component parts of the slacks shall be cut from the specified material and in accordance with the pattern parts indicated in table I.

TABLE I. List of pattern parts

Material	Pattern nomenclature	Cut parts
Cotton poplin cloth	Front	2
	Back	2
	Pocket	2
	Pocket flap	2
	Placket	1
	Facing	1
	Waistband	1

3.6 Construction.

* 3.6.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types specified in table II shall conform to FED-STD-751. When two or more seam or stitch types are given for the same part of an operation, any one of them may be used. When stitch type 401 is used, the looper (under thread) shall be on the inside of the slacks. The gage of stitching on double lapped and double stitched seams shall be 3/16 to 1/4 inch (5 to 6 mm), but the same gage shall be used on all double stitched seams throughout the slacks. When alternate safety stitch construction is used, the gage of stitching shall be 3/8 inch (10 mm). The guides and knives on the safety stitch machines shall be set to trim only the ravelled ends of the fabric. Seam allowances shall be maintained with seams sewn so that raw edges, run-offs, twists, pleats, or puckers will not result. All seams shall start and finish evenly. Seams required to be worked out, that have a depth between the fold of 1/16 inch (2 mm) or more, shall be considered a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

3.6.2 Stitches per inch (stitches/cm). The minimum and maximum number of stitches per inch (stitches/cm) shall be as specified in table II.

* 3.6.3 Thread breaks and ends of seams. Ends of all seams and stitching produced with 301 stitch type, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch (6 mm). Ends of a continuous line of stitching (except labels) shall overlap not less than 1/2 inch (13 mm). The ends of label stitching shall be overlapped not less than three stitches. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch (13 mm). Skipped stitches or thread breaks on 401 stitch type may be repaired by using 301 stitch type.

3.6.4 Buttonholes. The buttonholes shall be cut after eyelet end, taper bar type, worked over gimp with ends tacked. The purling shall finish on the outside and the cut length shall be 3/4 to 7/8 inch (19 to 22 mm). The bar end of the buttonhole shall have a minimum of four stitches not counting the first crossover stitch, in that it is part of the buttonhole not the bar.

3.6.5 Bartacks. Bartacks shall measure 3/8 to 1/2 inch (10 to 13 mm) long.

3.7 Manufacturing operations requirements. The slacks shall be manufactured in accordance with operation requirements specified in table II. The contractor is not required to follow the exact sequence of the operations as listed. Any additional basting or holding stitches used to facilitate manufacture is permissible providing the thread is removed or does not show on the finished slacks.

3.7.1 Marking. The component parts of the slacks shall be marked to insure a uniform shade and size throughout the slacks. Any method of marking may be used except:

(1) Corrosive metal fastening devices.

(2) Sew-on type tickets.

(3) Adhesive type tickets which discolor the material or leave traces of paper or adhesive on the material after removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

TABLE II
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut the slacks in strict accordance with Government furnished patterns which show directional lines, size and placement of pockets, darts, and notches for proper assembly of all parts. b. Cut all parts out of one piece of material except the placket and facing which may be cut from ends. Parts cut from ends shall closely match the shade of the slacks. c. Place fronts and backs so that the directional line is in the warp direction. Directional lines on the fronts and backs may vary from the warp direction by not more than 1-1/2 inches (38 mm). Measurements shall be taken at the top and bottom edges of the pattern from the directional lines to the selvaged edge (on the even side of lay) of the fabric and the difference between the two measurements shall not exceed the tolerance specified.						
2.	Marking (see 3.7.1). Mark, ticket, or bundle all parts, except those parts cut from ends, to insure a uniform shade and size throughout the slacks.						
3.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-656 shall be removed from production and replaced with non-defective and properly matched components.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUST

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Make darts.						
	Fold and stitch darts on fronts and backs, as indicated by marks on patterns, with the ends tapered to nothing 1 ± 1/8 inches (25 ± 3 mm) below drill holes.	301	OSf-1	10-14	50	50	
5.	Make patch pockets.						
	Finished appearance. The pockets shall be uniformly stitched with the facings lying smooth and flat.						
	a. Fold (face to face) bottom corner of pockets (cut out portion of pattern) at back edge and single stitch.	301	SSa-1	10-14	50	50	
	b. Slash seam to the end of the line of stitching; turn pocket and fold from slash to notch at top of pocket and from slash to notch at side on pocket and stitch 1/32 to 1/16 inch (1 to 2 mm) from folded edges.	301	OSf-1	10-14	50	50	
	c. Overedge stitch top raw edge of pockets; turn top of pocket to inside, as indicated on pattern, forming facing. The facing shall finish 1-1/2 ± 1/8 inches (38 ± 3 mm) in width.	503 or 504	EFd-1	6-10	70	70	
			EFd-1	6-10	70	70	
	d. Fold (face to face) from mitered corner to notch at side of pocket and from mitered corner to top of pocket and stitch 1/32 to 1/16 inch (1 to 2 mm) from folded edge catching the pocket facing in the stitching.	301	OSf-1	10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make pocket flaps.						
	Finished appearance. The flaps shall finish smooth and flat without twists, puckers, or pleats. The gage of edge stitching shall be uniform.						
	a. Fold flap in half and seam sides; turn, work out edges and corners, and edge stitch 1/32 to 1/16 inch (1 to 2 mm) along bottom and side edges.	301 or	SSe-2(a)	10-14	50	50	
		401 and	SSe-2(b)	10-14	50	70	
		301	SSe-2(b) and OSf-1	10-14	50	50	
				10-14	50	50	
	b. Make one vertical buttonhole centered on each pocket flap (1/4 inch (6 mm) off center tolerance permitted) with the inside edge of eyelet 1/2 to 5/8 inch (13 to 16 mm) from bottom edge.	Buttonhole		52-56 per buttonhole including tack	50	70	
7.	Overedge facing and placket.						
	a. Overedge back and bottom edges of facing.	503 or	EFd-1	6-10	70	70	
		504	EFd-1	6-10	70	70	
	b. Fold placket in half lengthwise and overedge stitch bottom edge.	503 or	SSa-1	6-10	70	70	
		504	SSa-1	6-10	70	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUS

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Attach facing to front.						
	Stitch facing to front from top to notch of opening. Slash seam allowance at notch to end of stitching, turn, and edge stitch 1/32 to 1/16 inch (1 to 2 mm) inch from edge.	301	SSe-2(a)	10-14	50	50	
		or 401	SSe-2(a)	10-14	50	70	
		and 301	SSe-2(b)	10-14	50	50	
9.	Make placket opening.						
	Position front, with facing attached, on placket with notches matching and with raw edges of placket and raw edge of seam allowance below notch even. Stitch across width of placket and facing 5/8 to 3/4 inch (16 to 19 mm) from bottom edges.	301	SSa-1	10-14	50	50	
		or 401	SSa-1	10-14	50	70	
10.	Join inseams and outseams.						
	Finished appearance. The joining of the inseams and outseams shall start and finish evenly and be uniformly gaged.						
	a. Join seams with a double lapped, double stitched seam with fronts on top of back at inseams, and backs on top of fronts at outseams.	301	LSc-2	10-14	50	50	
		or 401	LSc-2	10-14	50	70	
	- or -						
	b. The outseams only may be safety stitched catching back edges of the placket in the seaming.	515	SSa-2	10-14	50	70	
		or 516			chain stitching		
		or 519			70 overedge stitching	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Join front seams and seat seams. Join the front seams and the seat seams from the top of waist with a double lapped, double stitched seam in one continuous operation. The inseams shall not be staggered more than 1/4 inch (6 mm), center to center, and the seam may lap in either direction.	301 or 401	LSc-2 LSc-2	10-14 10-14	50 50	50 70	
12.	Attach pockets. Turn under the front edge of the pocket and edge of the under-ply of the bellows pleat along the bottom and back of the pocket, and single stitch the pockets to side, as indicated on pattern, with the stitching 1/32 to 1/16 inch (1 to 2 mm) from edges.	301	LSd-1	10-14	50	50	
13.	Attach pocket flaps. Position flap parallel to pocket opening, as indicated by pattern, and stitch raw edge of flap to slacks; turn flap down and raise stitch 3/16 to 1/4 inch (5 to 6 mm) from edge.	301 or 401 and 301	LSbk-2(a) LSbk-2(a) LSbk-2(b)	10-14 10-14 10-14	50 50 50	50 70 50	
14.	Make and attach waistband; insert labels. Finished appearance. The waistband shall finish smooth and flat. The width shall be uniform with the pointed end evenly worked out and symmetrical. The inside fold of darts shall be toward center front and back respectively. The corner at base of pointed end of waistband shall extend 5/8 to 3/4 inch (16 to 19 mm) beyond front edge of side opening.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUS

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
14.	Make and attach waistband; insert labels. (cont'd)						
	Identification label (when applicable) shall be not more than 1 inch (25 mm) to right of back seam, and size label or combination label (when applicable) similarly attached to left of back seam (as worn).						
	a. Fold waistband in half lengthwise and stitch end. Trim, turn to outside, and work out corner and pointed end.	301	SSe-2(a)	10-14	50	50	
	b. Stitch underside of waistband to top of slacks on inside, catching labels in the stitching.	301 401	SSa-1 SSa-1	10-14 10-14	50 50	50 70	
	c. Turn in bottom edge of outer side of waistband and stitch 1/16 to 3/32 inch (2 to 2.5 mm) from edge through slacks with the line of stitching continued around ends and top folded edge. The waistband shall finish 1-1/2 ± 1/8 inches (38 ± 3 mm) in width.	301	LSd-1 and OSf-1 and SSe-2(b)	10-14	50	50	
15.	Make buttonholes.						
	a. Make a horizontal buttonhole at pointed end of waistband, centered (1/4 inch (6 mm) off center tolerance permitted) and with inside edge of eyelet 3/4 to 7/8 inch (19 to 22 mm) from point.	Buttonhole		52-56 per buttonhole including tack	50	70	
	b. Make two buttonholes on front side opening, as indicated on pattern, through front and facing with inside edge of eyelets 1/2 to 5/8 inch (13 to 16 mm) from edge of opening.	Buttonhole		52-56 per buttonhole including tack	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Sew on buttons.						
	Finished appearance. The center button at end of waistband and buttons on placket shall be aligned with eyelets of respective buttonhole so as to permit a smooth and flat closure. When buttoned on the center button on waistband and with the buttons at side closure secured, the placket shall not be exposed.						
	a. Sew three buttons centered (1/4 inch (6 mm) tolerance) on end of waistband with the first, second, and third buttons positioned 1-3/8 ± 1/8 inches (35 ± 3 mm), 2-3/8 ± 1/8 inches (60 ± 3 mm) and 3-3/8 ± 1/8 inches (86 ± 3 mm) respectively from finished end. Measurements to be taken from center of buttons.	101 or		14-16 per button	50		
		301		14-16 per button	50	50	
	b. Sew buttons on placket to correspond to eyelets of buttonholes on front of slacks.	101 or		14-16 per button	50		
		301		14-16 per button	50	50	
	c. Sew one button on each pocket through facing to correspond with eyelet end of buttonhole in each flap.	101 or		14-16 per button	50		
		301		14-16 per button	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
17.	Bartacks.						
	a. Bartack the tops and bottom back corners of pockets with vertical bartacks superimposed on edge stitching joining pockets to the slacks.	Bartack		28 per bartack	50	50	
	b. Place a horizontal bartack at the bottom of side opening with the bartack catching the front, outseam, and placket.	Bartack		28 per bartack	50	50	
18.	Clean slacks.						
	a. Trim thread ends and remove all loose threads, spots, stains, and shade or size markings.						
	b. Close opening by fastening center button on waistband, and fold slacks.						

1/ Metric equivalents for stitches per inch are as follows:

Stitches per inch	Stitches/cm
6-10	2-1/2 - 4
10-14	4 - 5-1/2

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The finished measurements of the slacks shall conform to the following:

TABLE III. Measurements in inches (mm)

	6	8	10	12	14	16	18	20	Tolerance
1/2 Waist	11 (279)	11-3/4 (298)	12-1/2 (318)	13-1/4 (337)	14 (356)	14-3/4 (375)	15-1/2 (394)	16-1/2 (419)	± 1/2 (13)
1/2 Hip	17-3/4 (451)	18-1/2 (470)	19-1/4 (489)	20 (508)	20-3/4 (527)	21-1/2 (546)	22-1/4 (565)	23-1/4 (591)	± 1/2 (13)
Outseam	45-3/8 (1153)	45-1/2 (1156)	45-5/8 (1159)	45-3/4 (1162)	45-7/8 (1165)	46 (1168)	46-1/8 (1172)	46-1/4 (1175)	± 1/2 (13)

3.8.1 Methods of measuring. The slacks shall be buttoned at waistband (center button) and side closure.

1/2 Waist: With slacks folded at front and seat seams, measure from folded edge to folded edge across center of waistband.

1/2 Hip: Measure from side folded edge to side folded edge at top of pocket flaps.

Outseam: Measure from bottom edge of waistband to bottom edge of leg.

3.9 Workmanship. The finished slacks shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable point values.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

4.2 Quality conformance inspection.

4.2.1 End item examination. Sampling and inspection shall be performed in accordance with the provisions of MIL-STD-656. The slacks shall be classified as utility "U" slacks.

4.2.2 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards, unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. All test reports shall contain the individual values utilized in expressing the final result.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each pair of slacks shall be folded to approximately 23 by 14-1/2 inches (584 by 368 mm). Ten pairs of folded slacks of one size only shall be stacked in a bundle, with the waistbands alternated, and securely tied with cotton tape or twine approximately 4 inches (102 mm) in from each end.

5.1.2 Level C. Slacks shall be preserved-packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A packing. Sixty pairs of slacks of one size only, preserved-packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to class weather-resistant, grade V2s, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Level A bundles shall be packed flat six in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight (49 g/m^2) kraft paper conforming to type I, grade B of UU-P-268. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

5.2.2 Level B packing. Sixty pairs of slacks of one size only, preserved-packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to class domestic, grade 275, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, variety DW, grade 275 of MIL-B-17757. Level A packages shall be packed flat six in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight (49 g/m^2) kraft paper conforming to type I, grade B of UU-P-268. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of MIL-B-17757.

5.2.3 Level C packing. Slacks, preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking. In addition to any special marking required by the contract, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches (127 by 102 mm) with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The slacks are intended for wear by female military personnel of the Department of the Army.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Size required (see 1.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

6.3 Samples. For access to samples address the procuring activity issuing the invitation for bids.

6.4 Metric equivalents. Metric equivalents, indicated in parentheses throughout this document, are based on practices, conversion factors, and symbols specified in ASTM E 380 Standard for Metric Practice, and are for information only. In each instance, the value stated in US customary units shall be controlling. Applications for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activity:


Army - MD

Preparing activity:


Army - GL

Project No. 8410-A393

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

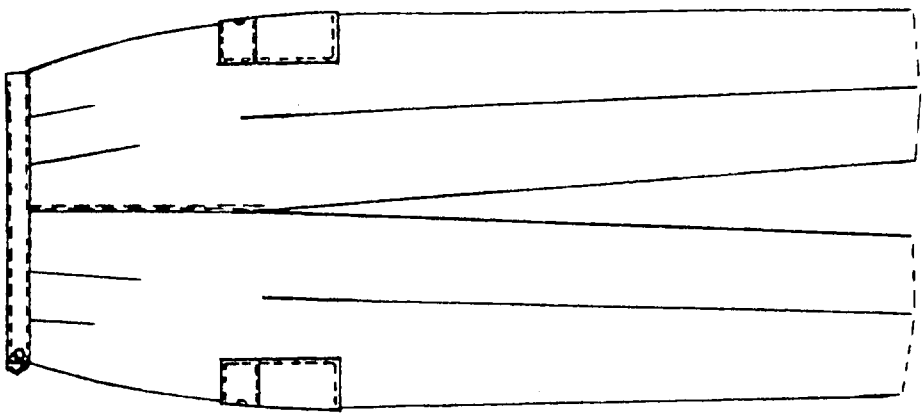

BACK

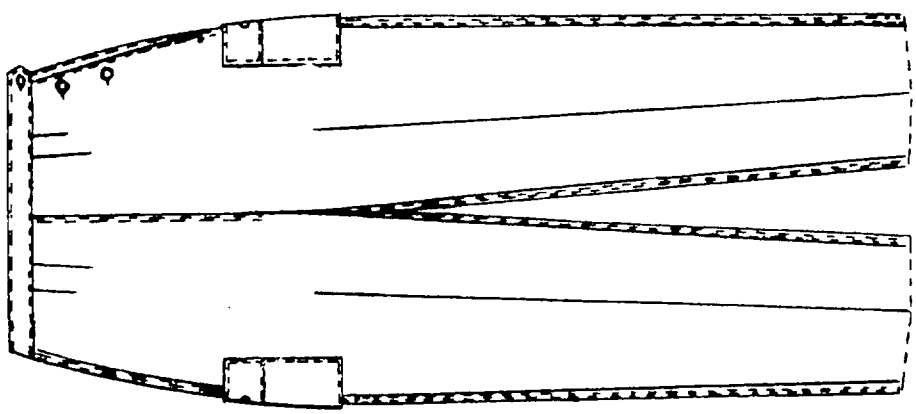

FRONT

FIG 1- SLACKS, UTILITY; WOMEN'S, COTTON, OG-107
2-1-69

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-43524D(GL) SLACKS, UTILITY, WOMEN'S, COTTON, OG-107

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK RESEARCH and DEVELOPMENT COMMAND
NATICK, MASSACHUSETTS 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
DRXNM-TDC

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314

U.S. MAIL

Commander
US Army Natick Research and Development Command
ATTN: DRXNM-TDC
Natick, MA 01760

NATICK OP 1 JUL 77
FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.