INCH-POUND

MIL-S-43526D
30 October 1989
SUPERSEDING
MIL-S-43526C
29 December 1983

MILITARY SPECIFICATION

SLACKS, UTILITY, WOMEN'S, WOOL, FIELD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of women's wool field utility slacks.

1.2 Classification. The slacks shall be in the following sizes (see 6.2).

Schedule of sizes

8, 10, 12, 14, 16, 18, 20

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-203	-	Paper, Kraft, Untreated
V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
V-T-280	-	Thread, Gimp, Cotton, Buttonhole
V-T-295	-	Thread, Nylon
DDD-L-20	-	Label: For Clothing, Equipage and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-C-508	-	Cloth, Oxford, Nylon, 3 Ounce
MIL-C-823	-	Cloth, Serge: Wool, Wool and Nylon, Polyester and Wool
MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-T-43548	-	Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-656	-	Provisions for Evaluating Quality of Slacks, Women's
MIL-STD-731		Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

THE COLOR ASSOCIATION OF THE UNITED STATES

Standard Color Card of America

Department of Defense Standard Color Card for Sewing Threads

Department of Defense Standard Shades for Buttons

(Color cards may be available from the Color Association of the United States, 343 Lexington Avenue, New York, NY 10016-0927. If color cards are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Guide samples. Samples of the end item, when furnished, are solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case this document shall govern.

3.3 Materials. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.3.1 Basic material. The basic material shall be wool serge cloth, 18 ounce, Olive Green 108, type I, class 1 of MIL-C-823.

3.3.2 Top pocket, placket and pocket facing. The nylon oxford cloth for the top pocket, placket and pocket facings shall conform to type I, class 2, Olive Green 106 of MIL-C-508.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

3.3.3 Thread. The thread for seaming and stitching shall be cotton-covered or rayon-covered polyester core conforming to ticket numbers 30, 3 ply, 50, 3 ply and 70 2 ply of MIL-T-43548. The thread shall be dyed to match Olive Drab S-1, C.A. 66022. If an automatic machine, which sews and shanks (wraps) the buttons in one operation is used, the thread shall be waxed nylon monocord, special No. 5, having a minimum breaking strength of 16 pounds and a minimum length per pound of 2,150 yards and shall be tested for these requirements and colorfastness (see 3.3.3.1) in accordance with V-T-295.

3.3.3.1 Colorfastness. The dyed thread shall show fastness to light and wet drycleaning equal to or better than the standard sample (see 6.4). When no standard sample is available, the dyed thread shall show "good" fastness to light and wet drycleaning.

3.3.4 Gimp. The cotton gimp for reinforcing the buttonholes shall be dyed Olive Drab S-1, C.A. 66022 conforming to type I or II, size No. 8 of V-T-280.

3.3.4.1 Colorfastness. The dyed gimp shall show fastness to wet drycleaning equal to or better than the standard sample. When no standard sample is available, the dyed gimp shall show "good" fastness to wet drycleaning.

3.3.5 Buttons. The buttons shall conform to type II, class D, style 20/21, 24-line of V-B-871 and shall be Olive Green BP, Cable No. 62016, with a glossy finish.

3.3.6 Labels. Each pair of slacks shall have a size label (class 2) and either a combination identification and instruction label (class 15) or separate identification (class 1) and instruction (class 3) label conforming to type VI of DDD-L-20. The labels shall show fastness to laundering. The instruction label shall contain the following information:

SLACKS, UTILITY, WOMEN'S, WOOL, FIELD

Dry clean; or Launder by Hand or Wool
Method Formula II, TM 10-280

DO NOT REMOVE THIS LABEL

3.4 Design. Slacks are unhemmed with hanging type front side pockets, adjustable waistband formed by side openings with button closures, and front and back darts at the waistline (see figure 1).

3.5 Figures. Figures are furnished for information only. If there are any inconsistencies between the written specification and the figures, the written specification shall control.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

3.6 Patterns. Standard patterns, which provide a seam allowance of 3/8 inch for all seams, except for pocket openings and edge of front and top pocket which have a 1/4 inch seam allowance, will be supplied by the Government. The standard patterns are provided as a guide for cutting the contractor's working patterns and shall not be altered in any way. The working patterns shall be identical to the standard patterns.

3.6.1 List of pattern parts. The pattern parts of the slacks shall be cut from materials as specified and in accordance with pattern parts indicated below:

List of pattern parts

Material	Nomenclature	Cut parts
Cloth, wool serge	Front	2
	Back	2
	Under pocket	2
	Placket	2
	Front waistband	1
	Back waistband	1
Cloth, nylon, oxford	Top pocket	2
	Placket facing and pocket facing	4
Markers	Buttonhole (sizes 8 and 10)	
	Buttonhole (sizes 12, 14, 16, 18 and 20)	

3.7 Construction.

3.7.1 Stitches, seams and stitchings. All stitches, seams and stitching shall conform to FED-STD-751. When two or more seam or stitch types are given for the same part of an operation, any one of them may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the slacks. The guides and knives on the overedge machines producing stitch types 502, 503 and 504 (or safety-stitch machines producing stitch types 515, 516, 517, 518 and 519) shall be set to trim only the ravelled edges of the fabric and in no case shall the amount trimmed be greater than 1/16 inch. Seam allowances shall be maintained with seams sewn so that raw edges, run-offs, twists, pleats or puckers will not result. All seams shall start and finish evenly.

3.7.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched 1/2 inch minimum except when caught in other seams or stitching. Thread tension shall be maintained so that there will be no loose stitching resulting in puckering of the material sewn. The lock shall be embedded in the materials sewn.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

3.7.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restitching a minimum of 3/4 inch back of the end of the stitching. 1/

b. Thread breaks, two or more consecutive skipped or runoff stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 3/4 inch in back of the defective area, continue over the defective area and continue a minimum of 3/4 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.7.1.2 Types 401, 502, 503, 504, 515, 516, 517, 518, 519 and 801 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.7.1.1.1.a and 3.7.1.1.1.b.

3.7.1.3 Type 101 stitching. Tension of 101 stitch type shall be adjusted and maintained so there will be no loose stitching resulting in either loose underneath or top thread, or sucessively tight stitching puckering outward appearance of slacks. The underneath loop shall be on the inside of the slacks, unless otherwise specified in table I.

3.7.1.3.1 Repairs of type 101 stitching. Repairs shall be accomplished by superimposing new tack or blindstitching in same location after removing threads of first broken tack or blindstitching. When repairing blindstitching, superimpose stitching 1/2 inch over loose ends of broken stitching.

3.7.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table I.

3.7.3 Buttonholes. The buttonholes shall be of the eyelet end, square bar or taper type worked over gimp. The cut lengths shall be 5/8 to 3/4 inch with the ends securely tacked. The purling shall be on the outside of the slacks. The bar end of the eyelet end taper bar type buttonholes shall have a minimum of 4 stitches not counting the first cross-over stitch in that it is part of the buttonhole not the bar.

3.7.4 Bartacks. Bartacks shall measure 3/8 to 1/2 inch long. Bartacking shall be free from thread breaks and loose stitching.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

3.7.5 Use of automated apparel equipment. Automated apparel equipment may be used to perform any of the operations specified in table I, providing that the seam and stitch type are as specified and the finished component conforms to the required configuration. When a government finished shaper pattern is forwarded, the component shall conform to that pattern.

3.8 Manufacturing operation requirements. The slacks shall be manufactured in accordance with operation requirements specified in table I. The contractor is not required to follow the exact sequence of operations. Any additional basting or holding stitching used to facilitate manufacture is permissible, provided the thread is removed or does not show on the finished slacks.

3.8.1 Pressing. All pressing required in table I shall be done with a heated pressing iron or machine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cut slacks. a. Cut the slacks in strict accordance with Government furnished patterns, which show directional lines, size and placement of pockets, darts and notches for proper assembly of all parts. b. Drill holes for darts shall be far enough from ends to allow taper. c. Cut the top pockets and the facings for the plackets and under pockets from the specified material. d. Place fronts and backs so that the directional line is in the warp direction. Directional lines on the fronts and backs may vary from warp direction by not more than 1-1/2 inches. Measurements shall be taken at the top and bottom edges of the pattern from the directional lines to the selvage edge (on the evenside of lay) of the fabric and the difference between the two measurements shall not exceed the tolerance specified.						
2.	Replacement of defective or damaged parts. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in 4.4.2 shall be removed from production and replaced with nondefective and properly matched components.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Marking. a. Mark, ticket or bundle all components to insure a uniform shade and size throughout the slacks. Any method of marking may be used except: (1) Corrosive metal fastening devices. (2) Sew-on type tickets. (3) Adhesive type tickets which leave traces of paper or adhesive on the material upon removal of the tickets. b. The use of ink pad numbering machine, rubber stamp or pencil will be acceptable provided the numbers do not show through the outside of the slacks and the numbers are covered by the seam allowance.						
4.	Overedge stitching. Finished appearance. When a knife is used on serging (overedging) machine, care shall be exercised to insure that the gage is properly set so that seam allowance is not lost but raw edge is trimmed when overedged. Overedge stitch inseams, outseams, center front and seat seams. The overedge stitching of the outseams on front parts shall terminate at the lower end of pocket notch.	502 or 503	EFd-1 EFd-1	6-10 6-10	70-2 70-2	70-2 70-2	
5.	Make darts. a. Fold and stitch darts on fronts and backs, as indicated by marks on patterns, with the ends tapered 1 ± 1/8 inches below drill holes to nothing.	301	OSf-1	10-14	50-3	50-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Make darts. (cont'd)						
	b. Press darts flat with the inside folded edges turned toward the center front and back, respectively.						
6.	Make front and back waistbands.						
	Fold waistbands in half lengthwise and stitch around pointed ends of front waistband and across square ends of back waistband. Turn and work out points, corners and edges.	301 or 401	SSe-2(a)	10-14 10-14	50-3 50-3	50-3 70-2	
7.	Make pockets.						
	Finished appearance. The pocket openings shall be flat against fronts, even in length and the bottom ends in horizontal alignment at the outseams. Hanging pockets shall hang straight and flat and fit the fronts of slacks smoothly.						
	a. Position nylon oxford placket facing on wool under pocket along side edge and stitch. Fold facing over side edge of pocket forming a 1/4 to 5/16 inch binding and raise stitch 1/16 to 3/32 inch from inside edge of binding through placket and pocket facing.	301 or 401 and 301	BSp-2(a) BSp-2(b)	10-14 10-14 10-14	50-3 50-3 50-3	50-3 70-2 50-3	
	b. Position instruction label on the back of the under pocket of left pocket, as worn, centered vertically (1/2 inch tolerance) on the lower half and stitch label on all four sides.	301	LSbj-1	10-14	50-3	50-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Make pockets. (cont'd)						
	c. Join nylon oxford top pocket to front along pocket opening edge. Turn with the seam line 1/8 to 3/16 inch back from edge of pocket opening and top stitch 1/4 to 5/16 inch from folded edge.	301 or 401 and 301	SSbe-2(a) SSbe-2(b)	10-14 10-14 10-14	50-3 50-3 50-3	50-3 70-2 50-3	
	d. Position pocket opening edge of front on under-pocket, in accordance with marks on pattern, and stitch in position from top edge of waist for a distance of 1-3/4 ± 1/8 inches. The stitching shall be superimposed on the top stitching of the pocket opening.	301	LSbj-1	10-14	50-3	50-3	
	e. Position top pocket on under pocket and seam and overedge stitch edges together from top of pocket to notch at side seam.	515 or	SSa-2	6-10	50-3 (chain stitching) 70-2 (all overedge stitching)	70-2 70-2	
		516 or 519	SSa-2	6-10	50-3 (lock stitching) 70-2 (all overedge stitching)	50-3 70-2	
	NOTE: The inner edges of nylon facing may be stitched to the under pocket pieces to hold in position.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make plackets.						
	a. Position nylon oxford facing on placket along side edge and stitch. Fold facing along over side edge of placket forming a 1/4 to 5/16 inch binding and raise stitch 1/16 to 3/32 inch from inside edge of binding through placket and facing.	301 or 401 and 301	BSp-2(a) BSp-2(b)	10-14 10-14 10-14	50-3 50-3 50-3	50-3 70-2 50 3	
	b. Join placket to side back from waist to notch; press seam open, fold placket 1 5/8 to 1-3/4 inches from joining seam line and stitch on the back 1/16 to 3/32 inch from placket joining seam line through all plies of placket.	301 or 401 and 301	SSao-2(a) SSao-2(b)	10-14 10-14 10-14	50-3 50-3 50-3	50-3 70-2 50-3	
	NOTE: The inner edges of nylon oxford facings may be stitched to placket to hold in position.						
9.	Join outseams and inseams.						
	Join inseams and outseams. Press seam allowance open and flat.	301 or 401	SSa-1	10-14 10-14	50-3 50-3	50-3 70-2	
10.	Join seat and front seams.						
	a. Join seat seam and front seam from the front waist to back waist in one continuous operation with two rows of stitching not more than 1/32 inch apart. The ends of inseams at crotch shall not be staggered more than 1/4 inch.	401	SSa-2	10-14	50-3	70-2	
	b. Press seat seam and front seam open and flat.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Attach waistband and insert labels.						
	Finished appearance. The waistband shall finish smooth and flat. The width shall be uniform with the pointed ends evenly worked out and symmetrical. The size label shall be positioned to the right of the seat seam and the identification label to the left of seat seam with the top ends caught in the stitching of the back waistband to slacks. When a combination size and identification label is used, it shall be positioned as the size label. Positioning of the labels to the slacks shall be as the slacks are worn.						
	a. Turn the side opening edge of under pocket to the inside, as indicated by marks on pattern, forming the pocket facing. The top edges of pocket and facing may be stitched to the top edge of waist to hold in position.	301 or 401 and 301	BSg-2(a)	10 14 10-14	50-3 50-3	50-3 70-2	
	b. Position inside edge of front waistband on the inside of the front with edges even and matching notches, as indicated on pattern, and stitch catching the top edge of pockets and the turned under side edge of the underpockets (facings) inserted under the waistband in the line of stitching. Turn waistband to outside and with the raw edge turned in, single stitch with the stitching continued along all sides 1/16 to 1/8 inch from edges.		BSg-2(b) and SSe-2(b) and OSf-1	10-14	50-3	50-3	
	c. Position inside edge of back waistband on the inside edge of back matching notches, as indicated on pattern, and stitch catching the top edges of the	301 or 401 and	BSg-2(a)	10-14 10-14	50-3 50-3	50-3 70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Attach waistband and insert labels. (cont'd)						
	placket in line of stitching. Turn waistband to outside and with the raw edge turned in, single stitch with the stitching continued along all sides 1/16 to 1/8 inch from edges.	301	BSg-2(b) and SSe-2(b) and OSf-1	10-14	50-3	50-3	
	or						
	d. Inner edges of front and back waistbands may be overedged in lieu of being turned in. Overedge inner edges of front and back waistbands before attaching to front and back respectively. Position outside edge of waistband with edges even and notches matching, as indicated on patterns. Stitch, catching top edges of pockets and the turned underside edge of the underpockets (facings) inserted under the waistband in the line of stitching in the front, and catching the top edges of the placket in the line of stitching in the back. Turn waistbands to inside with serged edges lying flat. Single stitch with stitching continued along all sides 1/16 to 1/8 inch from edges.	502 or 503	EFd-1 EFd-1	6-10 6-10	50-3 50-3	50-3 50-3	
	e. The waistband shall finish 1-1/4 to 1-3/8 inches in width.						
12.	Finish side opening.						
	Finished appearance. The side opening shall finish smooth and flat and shall be even in length.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

TABLE I (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Finish side opening. (cont'd)						
	a. Position facing to placket and seam and overedge stitch bottom edges together. The seaming and overedge stitching may be accomplished in one operation.	301 and	SSa-1	10-14	50-3	50-3	
		503 or	SSa-1	6-10	70-2	70-2	
		504 or		6-10	70-2	70-2	
		517 or	SSa-2	10-14	50-3 (lock stitching)	50-3	
					70-2 (all overedge stitching)	70-2	
		518					
	b. Bartack bottom end of pocket and side opening with a horizontal bartack through all plies.	Bartack		28 per bartack	50-3	50-3	
13.	Finish leg bottoms.						
	Pink or overedge stitch leg bottoms. The overedge stitching or pinking operation may be accomplished prior to the joining of the inseams and outseams.	502 or	EFb-1	6-10	70-2	70-2	
		503		6-10	70-2	70-2	
14.	Make buttonholes.						
	Finished appearance. Buttonholes shall be clean cut, and correctly positioned. The stitching shall be securely caught in the fabric.						
	a. Make two horizontal buttonholes with the inside edge of eyelets 3/8 to 1/2 inch from side opening edge of underpocket, as indicated by buttonhole marker.	Buttonhole		52-56 per buttonhole including tack	50-3	70-2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
14.	Make buttonholes. (cont'd)						
	b. Make one horizontal buttonhole centered (1/4 inch tolerance) on each extension end of front waistband with the inside edge of eyelet 3/4 to 1 inch from the pointed end of waistband.	Button-hole		52-56 per button-hole including tack	50-3	70-2	
15.	Attach buttons.						
	Finished appearance. The buttons on the waistband and buttons at side openings shall correspond with buttonholes so as to present a smooth and flat closure. When waistband is buttoned on the center button, the placket shall not be exposed. Hand sewn buttons shall be shank wrapped four times and the ends of the thread shall be securely tacked with not less than two stitches. Machine sewn buttons shall be shanked with a minimum of ten wraps with three locking stitches.						
	a. Sew two buttons on each back of side opening positioned so that when the front waistband button-hole is fastened to the center button on back waist-band with button resting in the eyelet end of the buttonhole, they will correspond to the eyelet ends of buttonholes on right and left fronts of slacks.	101 or		14-16 per button	30-3		
		301 or		14-16 per button	30-3	30-3	
		Hand or		3 double thread per button	30-3		
		801 (see fig. 2)		7 (min) 1 deep set per button	5 nylon		

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Attach buttons. (cont'd)						
	b. Sew three buttons centered (1/4 inch tolerance) on each end of back waistband with the middle button positioned so that when the front waistband buttonhole is fastened with the button resting in the eyelet of the buttonhole, the placket shall not be exposed. Sew the other two buttons 1 ± 1/8 inch on either side of the middle button for size adjustment. Measurement to be taken from center of buttons.	101 or 301 or Hand or 801 (see fig. 2)		14-16 per button 14-16 per button 3 double thread per button 7 (min) 1 deep set per button	30-3 30-3 30-3 5 nylon	30-3	
16.	Clean slacks.						
	Trim thread ends and remove loose threads; remove spots, stains, and shade or size markings.						
17.	Press slacks.						
	a. Press top of slacks smooth and flat.						
	b. Place legs, seam on seam, and press slacks smooth and flat.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

3.9 Measurements. The slacks shall conform to the finished measurements shown in table II.

TABLE II. Finished measurements (inches)

Size	8	10	12	14	16	18	20	Tolerance
1/2 waist 1/	11-3/4	12-1/2	13-1/4	14	14-3/4	15-3/4	16-3/4	± 1/2
1/2 hip 2/	18-1/2	19-1/4	20	20-3/4	21-1/2	22-1/4	23-1/4	± 1/2
Outseam 3/	45	46	46-1/2	47	47-1/4	47-1/2	47-3/4	± 1/2

Slacks shall be buttoned at waistband (center button) and side closure and measured as follows:

1/ With slacks folded in half at front and seat seams, measure from folded edge to folded edge across center of waistband.

2/ From side folded edge to side folded edge through points 8-3/4 inches from bottom edge of waistband on front seam and side edges.

3/ From bottom edge of waistband to bottom of leg.

3.10 Workmanship. The finished slacks shall conform to the quality of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.1.3 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined in accordance with the visual and dimensional examination provisions of MIL-STD-656.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 Point count inspection. Sampling and inspection provisions for end item examination of semi-dress "SD" slacks, dimensional examination and packaging inspection shall be performed in accordance with MIL-STD-656.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

4.4.3 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 (see 6.6).

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A preservation. Each pair of slacks shall be folded to approximately 23 by 14-1/2 inches. Five pair of folded slacks, of one size only, shall be stacked in a bundle with the waistbands alternated and securely tied with a cotton tape or twine approximately 4 inches in from each end.

5.1.2 Commercial preservation. Slacks shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Thirty pairs of slacks of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat six in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to A-A-203. Each fiberboard container shall be closed

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with MIL-STD-656. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2).

5.2.2 Level B packing. Thirty pairs of slacks of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat six in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to A-A-203. Each fiberboard container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with MIL-STD-656.

5.2.2.1 Wether-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in PPP-B-636, except that the inspection shall be in accordance with MIL-STD-656.

5.2.3 Commercial packing. Slacks, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), slacks, packed as specified in 5.2.2 or 5.2.3 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The slacks are intended for special duty services wear by female personnel of the Department of Defense.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. Size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is required (see 3.2, 4.3 and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2).
f. Type and class of unit load required (see 5.2.1).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).
i. Acceptance criteria required (see 6.6).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Sample. For access to samples, address the contracting activity issuing the invitation for bids or request for proposal.

6.5 Subject term (key word) listing.

Pants
Special duty uniform

6.6 Acceptance criteria. The acceptance criteria below are recommended for use. The acceptance criteria, as specified in the contract or purchase order, shall be binding. Unless otherwise specified, the following acceptance criteria are in accordance with MIL-STD-105.

6.6.1 For palletization examination. An acceptable quality level (AQL), expressed in terms of defects per hundred units, of 6.5 is recommended.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Army - GL
Air Force - 11

Review activities:

Army - MD
Air Force - 82, 99
DLA - CT

Preparing activity:

Army - GL

(Project 8410-0697)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.


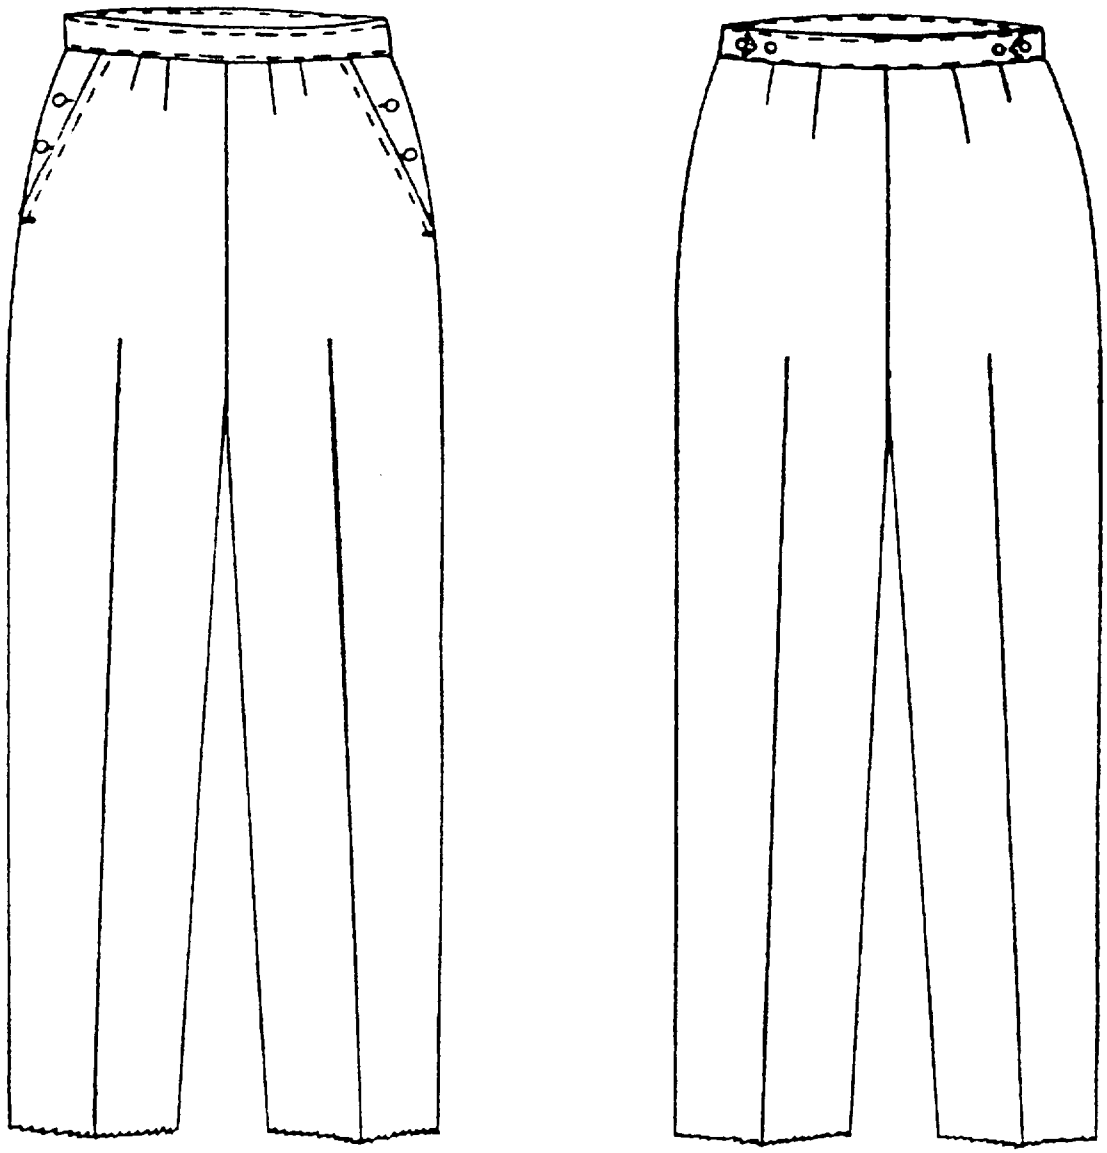


FIGURE 1 SLACKS, UTILITY: WOMEN'S WOOL

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

Stitch Class 800.- This class of stitch shall be formed with one or more needle threads and has for a general characteristic that the thread does not interloop with itself or any other thread or threads. The thread is passed completely through the material by means of a double pointed center eye needle and returned by another path. This class of stitch simulates hand stitching.

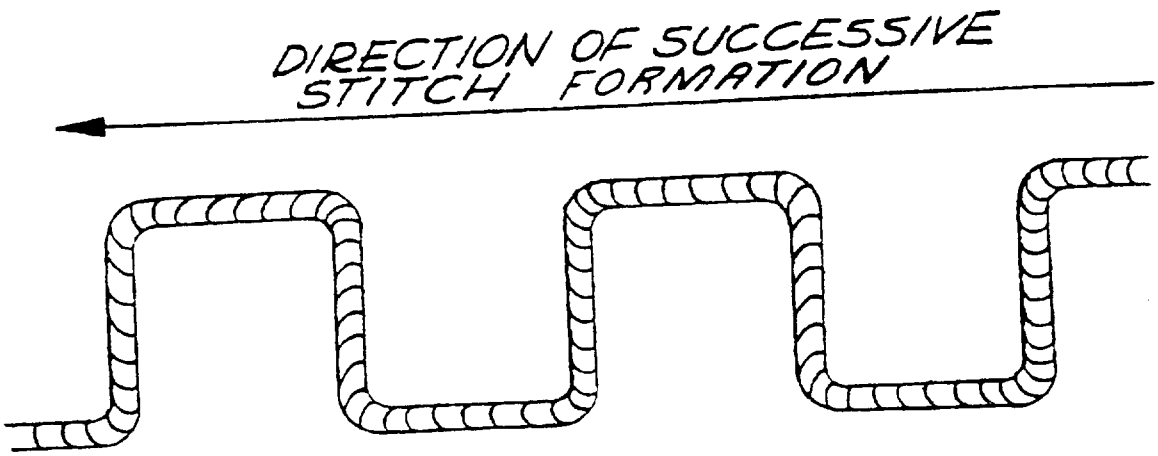

This type of stitch shall be formed with one needle thread which is passed completely through the material and returned by another path after the material has been moved forward one stitch length.

FIGURE-2-STITCH TYPE 801

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-43256D	Slacks, Utility, Women's, Wool, Field

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.

(Fold along this line)

DEPARTMENT OF THE ARMY

U.S. ARMY NATICK RESEARCH, DEVELOPMENT
and ENGINEERING CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATE

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Natick Research, Development
and Engineering Center
ATTN: STRNC-ES
Natick, MA 01760-5014

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:37Z
Check the source to verify that this is the current version before use.