6 January 1976
SUPERSEDING
MIL-S-43543A(GL)
30 December 1971

MILITARY SPECIFICATION

SWEATER, WOMAN'S, ARMY GREEN 329

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for an acrylic, double pique, knit, woman's sweater.

1.2 Classification. The sweater shall be of one type in the following sizes as specified (see 6.2):

Schedule of sizes

6	10	14	18
8	12	16	20

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

* SPECIFICATIONS

FEDERAL

V-T-276	-	Thread, Cotton
DDD-L-20	-	Label; for Clothing, Equipage, and Tentage, (General Use)
DDD-T-86	-	Tape, Textile; Cotton, General Purpose (Unbleached, Bleached, or Dyed)

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

PPP-B-566 - Boxes, Folding, Paperboard
PPP-B-676 - Boxes, Setup
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

MILITARY

MIL-B-17757 - Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-43491 - Cloth, Knitted, Acrylic, Double-Pique

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-1491 - Glossary of Knitting Imperfections

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Samples.

3.1.1 Guide sample. Samples of the sweater when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.1.2 First article. When specified (see 6.2), the supplier shall furnish a sample for first article inspection and approval (see 4.3 and 6.5).

3.2 Material.

3.2.1 Basic material. The material for the sweater shall be an acrylic, double-pique, knitted cloth conforming to MIL-C-43491. The color of the cloth shall be Army Green 329 (see 6.4).

* 3.2.2 Thread. The thread for seaming and stitching shall be cotton conforming to type IA3, ticket No. 60, 3 ply of V-T-276. The color of the thread shall be Green E, C.A. 66034 and shall show colorfastness to laundering (after 3 cycles), light and perspiration equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show good colorfastness to laundering (3 cycles), light and perspiration.

3.2.3 Tape. The cotton tape for reinforcing the neckline shall conform to type I, class 1, 1/4 inch width, of DDD-T-86.

3.2.4 Label. Each sweater shall have a combination identification and size label conforming to type I, classes 1 and 2 of DDD-L-20 except label shall not be so long as to extend below border stitching when attached (see table II, operation 4). The label shall show fastness to laundering.

3.2.5 Instruction tag. An instruction tag measuring not less than 2-1/2 by 3-1/2 inches shall be attached to each sweater by a cord threaded through the seam allowance at shoulder. The printing media shall be black. The legend shall be printed on stiff white paper or cardboard with capitals 1/8 inch in height and shall contain the following information:

WASHING INSTRUCTIONS (DO NOT BLEACH)

Machine

Use wash and wear setting, warm water,
and tumble dry at low temperature.

Hand

DO NOT WRING OR TWIST

Blot dry, spread loosely on flat surface.
When dry, press lightly with
warm iron on wrong side.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

3.3 Design. The sweater is a long cardigan type without buttons, and with a self-border around the neckline and down the front as shown on figure 1. Seams are overedged and sleeves and bottom are finished with blind stitched hems.

3.4 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.5 Patterns. Standard patterns which provide allowances of 1/4 inch for sides, sleeve setting, neck and attaching border to front; and 1/2 inch for shoulders, joining of neck border to the front border and turn under of back edge of border will be furnished by the Government. The Government patterns shall not be altered in any way and are to be used only as a guide for cutting the supplier's working patterns. The working patterns shall be identical to the Government patterns.

3.5.1 List of pattern parts. The components of the sweater shall be cut from the material as specified in table I in accordance with the pattern parts indicated.

TABLE I. Pattern parts

Material	Nomenclature of parts	Cut parts
Knitted cloth	Front	2
	Back	1
	Sleeve	2
	Neck border	1
	Front border	2
	Dart marker	Use for marking fronts

3.6 Construction.

3.6.1 Stitching, seams, and stitchings. Stitch, seam, and stitching types, as specified in table II shall conform to FED-STD-751. Whenever two or more methods of seams or stitches are given for the same part of the operation, any one of them may be used. Where stitch type 401 is used, the looper, that is the underthread, shall be on the inside of the sweater.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

* 3.6.1.1 Overedging and safety stitching. The gage of overedge stitching (stitch type 504) specified for the ends of sleeves and bottom of sweater shall be 1/8 inch. The gage of the safety-stitch for setting of sleeves and closing sides and sleeves shall be 1/4 inch.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.6.3 Thread breaks and ends of seams. Ends of all seams and stitching, produced with 301 stitch type, when not caught in other seams and stitching, shall be backtacked not less than 1/4 inch except that ends of a continuous line of stitching shall overlap and shall not be backtacked. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on the 401 stitch type may be repaired by using 301 stitch type.

3.7 Manufacturing operations requirements. The sweater shall be manufactured in accordance with all operations specified in table II. The supplier is not required to follow the exact sequence of operations. Any additional basting or holding stitching used to facilitate manufacture is permissible, provided the thread is removed or does not show on the finished garment.

3.7.1 Shade marking. The components of the sweater shall be shade marked to insure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.
(b) Sew-on shade tickets.
(c) Adhesive type tickets which leave traces of paper or adhesive on the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN or LOOPER	COVER
1.	Cutting. The face side of the cloth shall be on outside of the sweater. a. Cut the sweater in strict accordance with patterns furnished, which show size, directional lines, and notches for proper assembly of all parts. b. Cut all knitted parts for each sweater out of one piece of material. c. Cut the tape for reinforcing the neckline in the following lengths for the sizes indicated: Size: 6 — 8 — 10 — 12 — 14 — 16 — 18 — 20 Cut length (inches): 25-1/2 — 26 — 26-1/2 — 27 — 27-1/2 — 28 — 28-1/2 — 29 d. Mark darts on fronts in accordance with pattern marker for each size as required.						
2.	Replacement of damaged parts. a. Care shall be exercised during the spreading, cutting and manufacturing operations to assure that material defects and damages as classified in 4.4.2.1 are excluded and replaced with non-defective and properly matched materials. b. Replace any part damaged, during the manufacturing process, by needle chews, cuts, tears, holes, mends or burns.						

STSNL Form 903
27 Jul 73 EDITION OF 16 JUN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN or LOOPER	COVER
3.	Shade markings. (see 3.7.1) Mark ticket, or bundle all parts to insure uniform shade and correct size.						
4.	Attach label. Sew combination label to inside of sweater 1/2 to 3/4 inch below raw edge of center back neck. Label shall be stitched on all four sides. The stitching shall not show on outside of sweater after border is attached.	301		10-14	60-3	60-3	
5.	Make darts. Finished appearance. The darts shall be tapered to nothing at the end. The thread ends at end of dart shall not be trimmed closer than 3/4 inch. Fold darts as indicated by pattern and stitch. The darts shall not extend beyond the point marked on the pattern.	301 or 401		10-14	60-3	60-3	
6.	Join fronts to back. a. Overedge stitch raw edges of fronts and backs at shoulders.	504	EFd-1	10-14	60-3	60-3	
	b. Join fronts to back at shoulders.	401	SSa-1	10-14	60-3	60-3	
7.	Make border. a. Join neck border to front borders.	301	SSa-1	10-14	60-3	60-3	
	b. Press seams open with a moderately heated hand pressing iron. Do not stretch.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE II

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN or LOOPER	COVER
8.	Attach border.						
	Finished appearance. The border shall finish flat and smooth without twisting, stretching, pleats, puckers or raw edges. The width shall be uniform and stitch margin on both sides of border shall be the same.						
	a. Open shoulder seam and position border to inside of sweater with seams superimposed on shoulder seams.						
	b. Stitch border to sweater around neck and front edges catching tape in the stitching, with tape extending around neck from notch to notch.	301	SSe-2(a)	10-14	60-3	60-3	
	c. Turn border to outside of sweater, rolling the outside edge to cover the seam and top stitch 3/16 ± 1/32 inch from edge.	301	SSe-(b)	10-14	60-3	60-3	
	d. Turn under remaining raw edge of border and top stitch to sweater 3/16 ± 1/32 inch from edge. The border shall finish 2 ± 1/8 inches wide but shall not vary more than 1/8 inch on any individual garment.	301	LSd-1	10-14	60-3	60-3	
9.	Sew in sleeves.						
	a. Open shoulder seams and sew in sleeves.	401	SSa-1	10-14	60-3	60-3	
	b. Overedge stitch raw edges of armhole together.	504	SSa-2	10-14	60-3	60-3	
	or						
	c. Operations "a" and "b" may be performed in one simultaneous operation.	516 or 519	SSa-2	10-14	60-3	60-3	

STSNL Form 903
27 Jul 73 EDITION OF 16 JUN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN or LOOPER	COVER
10.	Join sides and undersleeves.						
	a. Join sides and undersleeves by seaming in one continuous operation turning the fold of darts toward bottom of sweater.	401	SSa-1	10-14	60-3	60-3	
	b. Overedge stitch raw edges.	504	SSa-2	10-14	60-3	60-3	
	or						
	c. Operations "a" and "b" may be performed in one simultaneous operation.	516 or 519	SSa-2	10-14	60-3	60-3	
11.	Hem sleeves.						
	a. Overedge stitch the ends of sleeves.	504	EFd-1	10-14	60-3	60-3	
	b. Fold hem to inside of sleeve and blind stitch, overlapping the blindstitching 1/2 to 1 inch at underarm seam. The hem shall finish 1-1/2 ± 1/8 inches wide.	103 or 306	EF1-1	4-5	60-3	60-3	
12.	Hem bottom.						
	a. Overedge stitch the bottom edge.	504	EFd-1	10-14	60-3	60-3	
	b. Fold bottom hem to inside of sweater and blind stitch. The hem shall finished 1-1/2 ± 1/8 inches wide.	103 or 306	EF1-1	4-5	60-3	60-3	
	c. Tack front opening by machine stitching superimposed on border stitching at front edges across width of hem, or close opening by hand stitching.	301 or hand		8-10	60-3	60-3	

STSNL Form 903
27 Jul 73 EDITION OF 16 JUN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN or LOOPER	COVER
13.	Clean sweater. Trim all ends of thread except on darts and remove loose threads. Remove all spots, stains and all visible shade markings.						
14.	Press sweater. Press the border and remainder of sweater lightly with moderately heated hand iron set on a synthetic setting to remove any wrinkles or other marks (Ironing should not exceed 300°F). Do not use a steam iron, pressing machine (steam or otherwise), or steam table. Do not crease sleeves, sides or shoulders in the pressing operation.						

STSNL Form 903
27 Jul 73 EDITION OF 16 JUN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

* 3.8 Finished measurements. The measurements of the finished sweater shall conform to the requirements in table III. All measurements and tolerances are expressed in inches. All measurements shall be taken with the sweater placed smooth and flat.

* TABLE III. Finished measurements

Measure 1/	Size								Tolerances
	6	8	10	12	14	16	18	20	
Bust 2/	35	36-1/2	38	39-1/2	41	42-1/2	44-1/2	46-1/2	± 3/4
Back length	25	26-1/2	27-1/2	27-3/4	28	28-1/4	28-1/2	28-3/4	± 3/8
Back neck	4-3/4	4-7/8	5	5-1/8	5-1/4	5-3/8	5-5/8	5-3/4	± 1/4
Sleeve length	20-1/2	21-1/2	22	22-1/4	22-1/2	22-3/4	23	23-1/4	± 3/8
Sleeve width	14	14-1/2	15	15-1/2	16	16-1/2	17-1/4	18	± 3/8
Sweep 2/	38	39-3/8	40-3/8	42-3/8	43-7/8	45-3/8	47-3/8	49-3/8	± 3/4

1/ Measurements shall be taken as described below and as shown on figure I.

2/ The A and F measurements indicated below shall be taken with the front edges abutted.

A. Bust. Twice the measurement taken across the sweater 1 inch below armholes.
B. Back length. Taken down center back from edge of neck to bottom edge.
C. Back neck. Taken from shoulder seam to shoulder seam at neck edge.
D. Sleeve length. Taken from shoulder seam to bottom of sleeve.
E. Sleeve width. Twice the measurement taken across sleeve at armhole.
F. Sweep. Twice the measurement taken across sweater at bottom edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

3.9 Workmanship. The finished sweater shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

* 4.3 First article. When required (see 6.2), the first article submitted in accordance with 3.1.2 shall be inspected as specified in 4.4.2.1 and 4.4.2.2 for compliance with design, construction, workmanship and dimensional requirements.

* 4.4 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with MIL-STD-105.

* 4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

* 4.4.2 Examination of the end item. Defects found during this examination shall be classified in accordance with the lists shown in 4.4.2.1 and 4.4.2.2. The sample unit for these examinations shall be one finished sweater. The lot size shall be expressed in units of one finished sweater. The inspection levels and acceptable quality levels (AQLs) for these examinations shall be in accordance with 4.4.2.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

* 4.4.2.1 Visual examination. The finished sweater shall be visually examined for defects listed in table IV.

TABLE IV. Visual defects

Defects	Classification Major	Minor
Material defects and damages		
Hole, cut, tear, run or dropped stitch 1/	X	
Slubs (more than twice the size of the normal diameter of the yarn) 1/		X
Snags 1/		X
Barre or cockled fabric 1/		X
Needle chew	X	
Thin place or mend 1/	X	
Permanent crease in fabric 1/	X	
1/ For knitted fabric imperfection definitions, see MIL-STD-1491.		
Shade		
Parts shaded or off shade	X	
Cleanness		
Spots or stains clearly visible	X	
Thread ends not trimmed and removed from sweater (except on darts)		X
One or more shade tickets not removed		X
Visible holding or basting thread on finished garment		X
Cutting		
Any component part not cut in conformance with directional lines indicated on patterns or in accordance with specification requirements		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE IV. Visual defects (cont'd)

Defects	Classification Major	Minor
Component and assembly		
Any component part or required operation omitted (unless otherwise classified herein)	X	
Any operation not performed as specified (unless otherwise classified herein)		X
Face side of cloth not on outside of sweater	X	
Seams and stitching		
Open seam	X	
NOTE: A seam shall be considered as being open when one or more stitches joining a seam are broken, or when two or more successive skipped stitches occur.		
Wrong seam or stitch type	X	
Parts of garment pleated, caught or twisted in any type of stitching and showing on outside	X	
Seam twisted or puckered on inside		X
Gage of overedge stitching less than 1/8 or more than 3/16 inch		X
End of seam or stitching produced with 301 stitch type, when not caught in other seam or stitching, back-tacked less than 1/4 inch		X
Thread break (all stitch types) not backstitched	X	
Thread break (all stitch types) backstitched less than 1/2 inch		X
Pressing		
Burned or scorched	X	
Sleeves, shoulder or sides creased	X	
Overpressed, e.g., seam impressions	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE IV. Visual defects (cont'd)

Defects	Classification Major	Minor
Raw edges		
Any on outside	X	
On inside, 1/8 to 1/2 inch inclusive		X
On inside, over 1/2 inch	X	
Stitch tension		
Loose tension resulting in a loosely secured seam	X	
Tight tension (stitching breaks when normal strain is applied to the seam or stitching)	X	
Stitches per inch		
One stitch per inch less than specified minimum or more than specified maximum		X
Two or more stitches per inch less than specified minimum or more than specified maximum	X	
Border (neck and front)		
Border seams not superimposed on shoulder seams		X
Width less than 1-7/8 but not less than 1-3/4 inches or more than 2-1/8 but not more than 2-1/4 inches		X
Width less than 1-3/4 inches or more than 2-1/4 inches	X	
Width not uniform with variance of more than 1/8 inch on any individual garment	X	
Either edge stitched less than 5/32 inch or more than 7/32 inch		X
Sleeves		
Underarm seam out of line at side seam:		
1/8 inch to 3/16 inch		X
More than 3/16 inch	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE IV. Visual defects (cont'd)

Defects	Classification Major	Minor
Hems		
Not of uniform width, i.e., narrow or wider in places		X
Not blind stitched, i.e., stitching shows on outside of sweater	X	
Width less than 1-3/8 inches or more than 1-5/8 inches		X
Blind stitch on sleeve overlapped less than 1/2 inch		X
Tack stitch at front border missing	X	
Two to four successive skipped stitches		X
Five or more successive skipped stitches	X	
Darts		
Crooked or twisted	X	
Thread ends at bottom of dart trimmed closer than 3/4 inch		X
Finished darts extend beyond the point of dart marked on the pattern	X	
Label or tag		
Missing, incorrect, illegible, misplaced or not properly attached		X

* 4.4.2.2 Examination for measurements.

TABLE V. Classification of measurement defects

Defect
Any measurement exceeding the specified dimensions and tolerances specified in table III.
Front and sleeve lengths uneven by more than 1/2 inch.

* 4.4.2.3 Inspection levels and AQLs. The inspection levels and AQLs expressed in defects per 100 units shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

Examination	Inspection level	AQL Major	AQL Total (Major and Minor)
4.4.2.1 Visual	II	2.5	6.5
4.4.2.2 Measurements	S-3	---	(1 class) 4.0

* 4.4.3 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking comply with the section 5 requirements. Defects shall be scored in accordance with table VI. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed in table VI shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

TABLE VI. Classification of preparation for delivery defects

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged or not as specified
Workmanship	Inadequate application of components, such as fabrication of intermediate boxes not as required, improper taping; incomplete closure of container flap, loose strapping, inadequate stapling Bulged or distorted container Open and non-continuous heat sealed seams of polyethylene bag
Content	Number of intermediate packages per container is more or less than specified Number of unit packages per intermediate package is more or less than required 1/

1/ For this defect, one intermediate package shall be examined from each shipping container in the sample.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Each sweater shall be laid flat with the front edges abutting and the back facing upward. The sides shall be folded in toward the center of the back and the sleeves positioned full length over the folded sides. The sweater shall then be folded in half by bringing the bottom edge up toward the shoulders, so that the folded garment measures approximately 14-1/2 by 11-1/4 inches. Each folded sweater shall be inserted in a snug-fitting flat style clear polyethylene film bag of 0.00125 inch thickness (+ 25 percent tolerance). The bag shall be not less than 1 inch greater in length than the folded garment. The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The bag opening shall not be sealed and shall be at the smaller dimension of the bag.

★ 5.1.1.2 Intermediate packaging. Four sweaters of one size only, unit packaged as specified in 5.1.1.1, shall be packaged in a folding or set-up, paperboard box having outside dimensions (lid included) of 14-3/4 inches in length, 11-1/2 inches in width, and 5 inches in depth. Folding boxes shall be made of 0.045 inch thick Kraft lined (inside and outside) chipboard conforming to variety 1, style III, type G, class j, sub-class 1, group I of PPP-B-566. Set-up boxes shall be made of 0.048 inch thick non-bending paperboard conforming to type II, variety 1, class A, style 4 of PPP-B-676. The lid of the paperboard boxes shall be not less than 1 inch in depth. Closure of boxes shall be effected with 2-inch minimum width gummed paper tape conforming to type III, grade B of PPP-T-45.

5.1.2 Level C. Sweaters shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Twenty-four sweaters of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to class weather-resistant, size 3, grade V2s of MIL-B-17757. Level A packages shall be packed flat, two in length, one in width, and three in depth within a shipping container. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

* 5.2.2 Level B. Twenty-four sweaters of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic variety SW, size 3, grade 275 of MIL-B-17757. Level A packages shall be packed flat two in length, one in width, and three in depth within a shipping container. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

5.2.2.1 When specified (see 6.2), the shipping container shall be grade V3c, V3s or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

5.2.3 Level C. Sweaters, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches, with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The sweaters are intended for use by female personnel.

6.2 Ordering data. Procurement documents should specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

a. Title, number and date of this specification.
b. Sizes required (see 1.2)).
c. When a first article is required (see 3.1.2, 4.3 and 6.5).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples. For access to guide and standard samples, address the procuring office issuing the invitation for bids.

6.4 Dyestuff formulation, Army Green 329. A suggested but not mandatory dyestuff formulation for Army Green 329 is as follows:

Basic Yellow	32
Basic Red	18
Basic Blue	22

* 6.5 First article. When a first article sample is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample. The first article should consist of one finished sweater. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for inspection and approval of the first article.

6.6 The margins of this specification are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no laibility whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activity:


Army - MD

Preparing activity:

Army - GL


Project No. 8410-A248

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

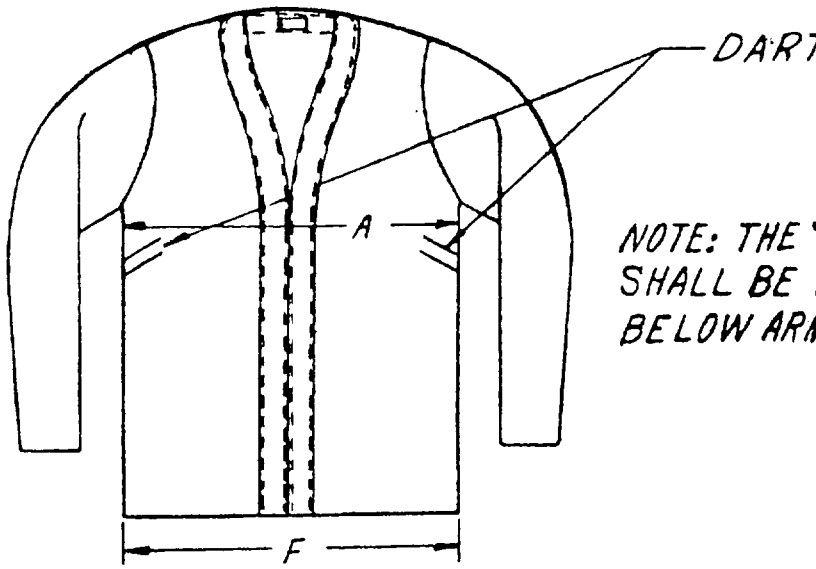

NOTE: THE "A" MEASUREMENT SHALL BE TAKEN ONE INCH BELOW ARMHOLE SEAMS.

FRONT VIEW

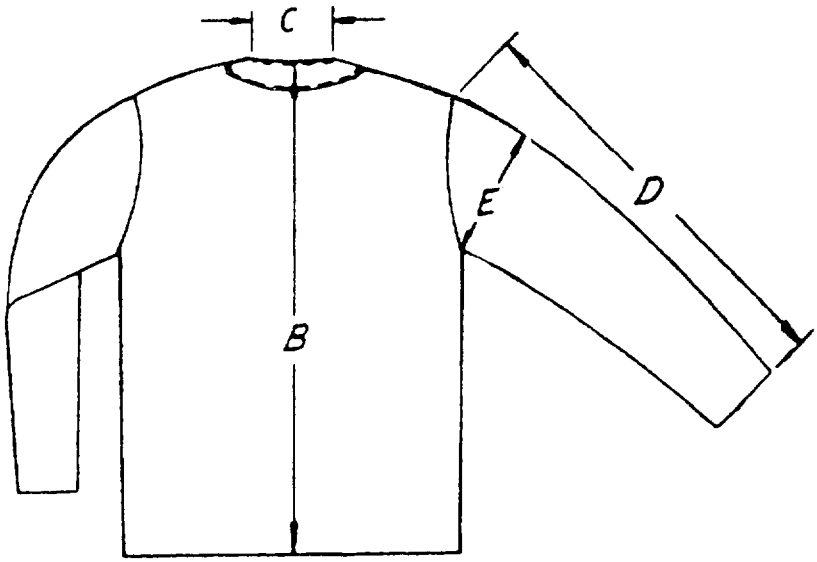

BACK VIEW

FIGURE 1 SWEATER, WOMEN'S, GREEN 329

2-1-746 D

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development
Laboratories
ATTN: DRDNA-ES (Mr. D. Luppino)
Natick, MA 01760

NO POSTAG
NECESSAR
IF MAILED
IN THE
UNITED STAT

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve prompt procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-S-43543B (GL) SWEATER, WOMAN'S, ARMY GREEN 329

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.