MIL-T-43497D
26 July 1988
SUPERSEDING
MIL-T-43497C
23 January 1984

MILITARY SPECIFICATION

TROUSERS, COLD WEATHER, FIELD, NYLON AND COTTON

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers water repellent sateen trousers with leg cargo pockets.

1.2 Classification. The trousers shall be one type in the following classes and sizes (see 6.2).

Class 1 - Olive Green 107
Class 2 - Woodland Camouflage

Schedule of sizes

X-Short	Short	Regular	Long
X-small	X-small	X-small	X-small
Small	Small	Small	Small
Medium	Medium	Medium	Medium
	Large	Large	Large
	X-large	X-large	X-large

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

A-A-203	-	Paper, Kraft, Untreated
V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106	-	Fasteners, Slide, Interlocking
V-L-61	-	Laces, Nylon
V-T-280	-	Thread, Gimp, Cotton, Buttonhole
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-B-371	-	Braid, Textile, Tubular
MIL-B-543	-	Buckles, Tongueless and Web Strap
MIL-T-3530	-	Thread and Twine; Mildew Resistant or Water Repellent Treated
MIL-F-10884	-	Fasteners, Snap
MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-C-43191	-	Cloth, Wind Resistant Sateen, Cotton and Nylon
MIL-T-43548	-	Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-T-43566	-	Tape, Textile, Cotton, General Purpose, Natural or in Colors

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:34Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-731 - Quality of Wood Members for Containers and Pallets
MIL-STD-1488 - Provisions for Evaluating Quality of Trousers

(Copies of specifications, standards, and handbooks required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Copies should be obtained from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

Chromatic Transference Scale

(Copies should be obtained from the American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, NC 27709.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this document may appear in the sample, in which case this document shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3, 6.2 and 6.4).

3.3 Material.

3.3.1 Basic material.

3.3.1.1 Class 1. The basic material for class 1 shall be cotton and nylon, water repellent, sateen, Olive Green 107, conforming to class 2 of MIL-C-43191.

3.3.1.2 Class 2. The basic material for class 2 shall be cotton and nylon, water repellent, sateen, Woodland Camouflage, conforming to class 3 of MIL-C-43191.

3.3.1.3 Cloth for pockets, linings, and facings. The cloth for the side and hip hanging pockets, compass pocket, left fly and right fly lining, waistband lining and cargo pocket facings shall be basic material, ground shade cloth, dyed seconds or printed seconds cloth. The ground shade cloth shall be dyed in conformance with class 3 of MIL-C-43191 for the class 2 trousers, prior to overprinting of the camouflage pattern. The ground shade cloth shall meet the applicable basic material physical, mechanical, and dimensional requirements. Dyed seconds shall be cloth which has been rejected only for defects cited in MIL-C-43191 pertaining to class 2 and the color and shade shall approximate OG-107 for use in the class 1 trousers. Printed seconds shall be cloth which has been rejected only for defects pertaining to color, infrared reflectance, or camouflage printed patterns cited in MIL-C-43191 for class 2 trousers. If printed seconds are used, they must be marked on the face side with stripes, 3 inches apart across the full width running in a warpwise direction for the length of the entire roll. The stripes shall be 1/8 to 1/2 inch wide and shall be applied by the cloth finisher. The color of the stripes shall approximate any one of the camouflage print colors, and shall have an AATCC Chromatic Transference Scale rating for crocking not lower than 1.5.

3.3.2 Braid, textile (tubular). The braid for the leg hem drawcord shall be water repellent treated, 4/32 inch, Olive Green 107, conforming to type IV, class 2 of MIL-B-371.

3.3.3 Tape. The tape shall be Olive Green 107, conforming to type I, class 8 of MIL-T-43566, except that the colorfastness to crocking and accelerated aging shall not apply. The widths of tape shall be as follows:

5/8 inch	-	for waist adjustment straps and for cargo pocket tie tapes
1 inch	-	for waistband button tabs

3.3.4 Laces, nylon. The suspender loops and leg loops shall be made from nylon laces, Olive Green 106, conforming to type I, class 2 or type II, class 2 of V-L-61 except that the requirements pertaining to length and tipping shall not apply.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:34Z
Check the source to verify that this is the current version before use.

3.3.5 Labels. Each of the trousers shall have a size label and a combination identification-instruction label conforming to type VI of DDD-L-20. The color of the label cloth shall be Medium Green (see 6.5). The fastness to laundering requirements of DDD-L-20 shall apply.

3.3.5.1 Size label. The size label shall conform to type I, class 2 and shall contain the information for each size as shown in table I.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:34Z
Check the source to verify that this is the currentversion before use.

TABLE I. Size information

X-small - X-short	X-small - Short	X-small - Regular	X-small - Long
Waist: Below 27 in. Inseam: Up to 26-1/2 in. Stock No.: NATO size: 6067/5869	Waist: Below 27 in. Inseam: 26-1/2 to 29-1/2 in. Stock No.: NATO size: 6775/5869	Waist: Below 27 in. Inseam: 29-1/2 to 32-1/2 in. Stock No.: NATO size: 7583/5869	Waist: Below 27 in. Inseam: Over 32-1/2 in. Stock No.: NATO size: 8390/5869
Small - X-short	**Small - Short**	**Small - Regular**	**Small - Long**
Waist: From 27 to 31 in. Inseam: Up to 26-1/2 in. Stock No.: NATO size: 6067/6979	Waist: From 27 to 31 in. Inseam: 26-1/2 to 29-1/2 in. Stock No.: NATO size: 6775/6979	Waist: From 27 to 31 in. Inseam: 29-1/2 to 32-1/2 in. Stock No.: NATO size: 7583/6979	Waist: From 27 to 31 in. Inseam: Over 32-1/2 in. Stock No.: NATO size: 8390/6979
Medium - X-short	**Medium - Short**	**Medium - Regular**	**Medium - Long**
Waist: From 31 to 35 in. Inseam: Up to 26-1/2 in. Stock No.: NATO size: 6067/7989	Waist: From 31 to 35 in. Inseam: 26-1/2 to 29-1/2 in. Stock No.: NATO size: 6775/7989	Waist: From 31 to 35 in. Inseam: 29-1/2 to 32-1/2 in. Stock No.: NATO size: 7583/7989	Waist: From 31 to 35 in. Inseam: Over 32-1/2 in. Stock No.: NATO size: 8390/7989
	Large - Short	**Large - Regular**	**Large - Long**
	Waist: From 35 to 39 in. Inseam: Up to 29-1/2 in. Stock No.: NATO size: 6775/8999	Waist: From 35 to 39 in. Inseam: 29-1/2 to 32-1/2 in. Stock No.: NATO size: 7583/8999	Waist: From 35 to 39 in. Inseam: Over 32-1/2 in. Stock No.: NATO size: 8390/8999
	X-Large - Short	**X-large - Regular**	**X-large - Long**
	Waist: From 39 to 43 in. Inseam: Up to 29-1/2 in. Stock No.: NATO size: 6775/9909	Waist: From 39 to 43 in. Inseam: 29-1/2 to 32-1/2 in. Stock No.: NATO size: 7583/9909	Waist: From 39 to 43 in. Inseam: Over 32-1/2 in. Stock No.: NATO size: 8390/9909

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

3.3.5.2 Combination identification-instruction label. The identification label (class 1) and instruction label (class 3) shall be combined into one label, conforming to class 3 requirements. The body of the instructions shall be as follows:

1. Wear as outer garment in cold-wet climate or as the inner layer of the cold-dry uniform.
2. Button in liner for extra warmth. Remove it when damp or wet and allow to dry.
3. Attach suspender hooks to waist loops.
4. Adjust waist by buckle straps.
5. Ventilate by loosening drawcords.
6. Wear leg bottoms outside footgear and secure drawcords.
7. Brush off snow and frost before entering heated shelter.
8. Avoid contact with heated stoves, open fires or other high heat source; fabric may fuse.
9. Dry trousers and liner separately.
10. Lubricate slide fasteners with lead pencil, graphite or wax.
11. For cleaning and restoring and water repellency, return to laundry for machine washing in accordance with established procedures for quarpel treated garments.
12. Machine washing: Use Permanent Press Cycle. Wash in warm water using mild detergent.
13. Hand washing: Wash in warm water using mild detergent. DO NOT WRING OR TWIST. Rinse in clean warm water.
14. DO NOT USE CHLORINE BLEACH OR STARCH.
15. Drying: Dry at low heat (do not exceed 130°F). After drying, tumble at room temperature for 10 minutes. Remove immediately from dryer. To drip dry, remove from water and place on a rustproof hanger.

DO NOT REMOVE THIS LABEL

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:34Z
Check the source to verify that this is the current version before use.

3.3.6 Thread. The thread for all seaming and stitching shall be cotton-, rayon-, or polyester-covered polyester core thread, ticket nos. 30, 3 ply, 50, 2 or 3 ply and 70, 2 ply conforming to MIL-T-43548. The color shall be Olive Drab S-1 C.A. 66022. The thread shall be water repellent treated in accordance with type II, class 3 of MIL-T-3530.

3.3.7 Gimp. The gimp for reinforcing buttonholes shall be cotton, Olive Drab S-1 C.A. 66022, conforming to size No. 8, type I or II of V-T-280. The dyed gimp shall show fastness to laundering (after 3 cycles) to or better than the standard sample (see 6.3). When no standard sample is available, the dyed gimp shall show "good" fastness to laundering (after 3 cycles).

3.3.8 Buttons. The buttons shall be type II, class D, style 26, 30-line, Olive Green Shade BP, Cable No. 62016 dull finish, conforming to V-B-871.

3.3.9 Fastener, slide, interlocking. The slide fastener shall be type I, style 3, size MS, short tab pull with thong, brass chain, conforming to V-F-106 except that the tapes shall be 9/16 $\pm$ 1/32 inch wide and the finished length of the thong after assembly shall be 3 $\pm$ 3/4 inches. The slide fasteners for the various sizes shall be of sufficient lengths to comply with operations 11 and 12 of table III. The slide fastener tapes shall be Olive Drab Shade S, Cable No. 66519, and shall show fastness to laundering. When no standard sample (see 6.3) is available, the dyed tapes shall show "good" fastness to laundering.

3.3.10 Fasteners, snap. The snap fastener for pocket flaps shall be brass, style 2A, finish 2, male and female complete, consisting of stud with size 1 or 2 eyelet and socket with size 1 or 2 eyelet (instead of button) conforming to MIL-F-10884.

3.3.11 Buckles. The buckles for waist adjustment straps shall be tongueless 2 bar, style 3, 5/8 inch, conforming to type II, class 3 of MIL-B-543.

3.4 Design. The trousers have hip pockets, side front pocket, leg cargo pockets with tie tapes and pocket flaps having snap fastener closures, compass pocket, waist adjustment straps, suspender loops, inside button tabs and leg hem drawcords (see figure 1).

3.5 Figure. Figure 1 is furnished for information purposes only. If there are any inconsistencies between the document and the figure, the document shall control.

3.6 Patterns. Standard patterns, which provide an allowance of 1/2 inch for double-needle or safety-stitch joining seams, 1/4 inch for pocket flaps and 3/8 inch for other seams will be furnished by the Government to the contractor for cutting working patterns. The working patterns shall be duplicates of the Government patterns which show size, placement of pockets, and notches for proper assembly of all parts. The Government patterns and working patterns shall not be altered in any way.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:34Z
Check the source to verify that this is the current version before use.

3.6.1 List of pattern parts. The pattern components for the trousers shall be cut from materials as specified and according to the number of parts listed in table II.

TABLE II. List of pattern parts

Component	Nomenclature	Cut parts
Cotton/nylon sateen cloth	Front	2
	Back	2
	Side pocket bearer	2
	Side pocket facing 1/	2
	Side pocket flap lining	2
	Side pocket flap	2
	Cargo pocket	2
	Cargo pocket flap	2
	Cargo pocket facing 1/ 2/	2
	Fly (one right and one left) 1/	2
	Hip pocket bearer	2
	Hip pocket cord (facing)	2
	Hip pocket flap	4
	Right fly lining 1/	1
	Compass pocket 1/	1
	Compass pocket (overedge construction - optional)	1
	Hip pocket 1/	2
	Side front pocket 1/	2

1/ May be cut from printed seconds or ground shade material.

2/ The cargo pocket facing, belt loops, and waistband lining may be roll-cut.

3.7 Construction.

3.7.1 Stitches, seams, and stitching. Stitch, seam, and stitching types specified in table III are those covered by FED-STD-751. Whenever two or more seam or stitch types are given for the same part of the operation, any one of them may be used. When stitch type 401 is used, the looper thread shall be on the inside of the trousers. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. The gage of stitching for the double lapped, double-stitched seams shall be 3/16 to 5/16 inch. The edge of the overedge machines shall be set to trim off only the ravelled yarns at the edge of the material; the specific seam allowances shall be maintained. Unless otherwise indicated in table III, bartacks shall be not less than 1/2 inch long and the throw for all bartacks shall be not more than 1/8 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

3.7.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table III.

3.7.3 Thread breaks and ends of seams. Ends of all seams and stitchings, when not caught in other seams or stitching (exception - operation 14.i), shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching (except labels) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than three stitches. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type may be repaired using 301 stitch type.

3.7.4 Buttonholes and eyelets. The buttonholes shall be eyelet-end-taper-bar-cut-after type, worked over gimp, with the purling on the outside and the end of the buttonhole stitching and gimp securely tucked, except that trouser hems may have eyelets or straight-cut type buttonholes, with ends securely tacked. The bar at the end of the taper-bar buttonholes shall have a minimum of four tacks not including the first cross-over stitch. Eyelets for alternate leg bottom drawcord shall be sewn with the purling on the outside with a 3/16 to 1/4 inch diameter finished opening. The width or bight of stitching around the eyelet shall be not less than 1/16 inch. The eyelet stitching shall have at least four overlapping stitches.

3.7.5 Automatic stitching. Automatic machines may be used to perform any of the requirements for the stitch pattern, stitches per inch, size, and type of thread are met, and at least three or more tying, overlapping, or back stitches are used to secure the ends of the stitching.

3.7.6 Thread ends. All thread ends shall be trimmed to a length of not more than 1/4 inch.

3.8 Manufacturing operations requirements. The trousers shall be manufactured in accordance with operation requirements specified in table III. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching to facilitate manufacture is permissible, provided the thread is removed or does not show on the finished trousers.

3.8.1 Marking. The cut parts shall be marked to insure a uniform shade and size throughout the trousers. Any method of marking may be used except:

(1) Metal fastening devices.
(2) Sew-on shade tickets.
(3) Adhesive type tickets which leave traces of adhesive on the material after removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE III.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut the basic material so that the face (filling effect side) will finish on the outside of the trousers. The flies may finish with the face in or the face out. b. Cut the material in strict accordance with patterns furnished, which show directional lines and marks and notches for proper assembly. Directional lines indicate warp direction. The directional lines on the fronts and backs may vary from the warp direction by not more than 2-1/2 inches. Measurement shall be taken from the top and bottom of the directional line on pattern to the selvage edge of the fabric (even side of lay) and the difference between the two measurements shall not exceed 2-1/2 inches. c. Cut the basic material parts from the same piece of material except hip pocket cords, belt loops, under ply of flaps, pockets, and flies, which may be cut from ends. Parts cut from ends shall approximate the shade of the garment. d. Cut reinforcement pieces for flap, snap fasteners and leg drawcord outlets from the basic material, and sufficiently long and wide to reinforce the snap fasteners and buttonholes. e. Cut the stripping for belt loops of sufficient width to finish 3/8 to 9/16 inch wide (see operation 6).						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd) f. Cut waistband lining on the straight in the warp direction sufficiently wide to measure 1-3/4 ± 1/8 inches wide in the finished trousers and sufficiently long to comply with operation 23. g. Cut the right fly lining on the straight in either the warp or filling direction, or on the bias. h. Cut the hanging pockets in the warp direction. A minimum number may be cut in the filling direction when necessary for most economical utilization of material. i. Cut leg drawcords of sufficient length to allow for an extension of not less than 3 inches (unknotted) from each buttonhole. Dip or impregnate the ends of drawcords with cellulose acetate or cellulose butyrate. j. Cut the waist adjustment straps (two each) from the 5/8 inch tape, 6-1/2 to 7 inches long (see operations 4 and 26). k. Cut the buckle straps (two each) from the 5/8 inch tape, 2-1/2 to 2-3/4 inches long (see operations 4 and 26). l. Cut the cargo pocket tie tapes from the 5/8 inch tape, 40 ± 1 inches long with the ends straight or diagonally cut. Dip the ends in cellulose acetate or cellulose butyrate solution to impregnate them.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd) m. Cut the waistband button tabs (six each) from the 1 inch tape of sufficient length to finish 1-1/4 to 1-1/2 inches in the finished trousers (see operations 7 and 22). n. Cut the suspender loops (two each) 5-1/2 ± 1/4 inches long for all X-small sizes and 6-1/2 ± 1/4 inches long for all other sizes. o. Cut the leg loop of sufficient length to comply with operation 34.a.						
2.	Marking. Mark, ticket, or bundle cut parts to insure uniform shade and size throughout the garment.						
3.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1488 shall be removed from production and replaced with non-defective and properly match components.						
4.	Make waistband adjustment straps. a. Thread buckle strap tape through first and second slot at straight end of buckle; fold tape over bar; pull top ply 3/8 to 1/2 inch longer than bottom ply and fold over end of bottom ply. A tack or a line of stitching through all plies to hold in position may be applied.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Make waistband adjustment straps. (cont'd)						
	b. Turn back one end of adjustment strap 3/4 to 1 inch; turn in raw edge 1/4 inch and box stitch or bartack 1/16 to 1/8 inch from fold.	301 or bartack		10-14 28 per bartack	50 30	50 30	
	c. Thread unfinished end of strap over the first bar from lip end and pull turned-under end of tape toward lip.						
5.	Make cargo pocket tie tapes.						
	Fold tie tape 12 ± 1/2 inches from end and bartack across the width of tape 3/4 to 1 inch from fold.	Bartack		28 per bartack	30	30	
6.	Make belt loops.						
	a. Turn the edges of the belt loop stripping (see operation 1.e) to the center and stitch the abutted edges with a row of stitching (3/16 to 5/16 inch gage) extending across and covering the edges of the material.	406	EFh-1	10-14	50	50	
	- or -						
	b. Fold loops with the raw edges turned in and stitch 1/16 to 1/8 inch from each edge.	301	EFp-2	10-14	30	30	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN/ LOOPER	THREAD COVER
7.	Make waistband button tabs.						
	a. Turn up one end of tape 1/2 to 5/8 inch and stitch or bartack across tape, not less than 1/8 inch from raw edge. The bartack shall be not less than 3/4 inch long.	301 or 304 or Bartack	EFa-1 EFa-1	10-14 10-14 28 per bartack	30 30 30	30 30 30	
	b. Sew a 30-line button on center of tab through hem with center of button 3/8 to 1/2 inch from the folded edge.	301 or 101		14-16 per button 14-16 per button	30 30	30 30	
	- or -						
	c. Fold tape in half widthwise and sew a 30-line button on center of tab through both plies of tape with the center of button 3/8 to 1/2 inch from folded edge.	301 or 101		14-16 per button 14-16 per button	30 30	30 30	
8.	Make hip, side, and cargo pocket flaps.						
	Finished appearance. The flaps for hip, side, and cargo pockets shall be uniform in shape and stitching. The socket part of the snap fasteners shall be attached to flap through the lining and reinforcement piece only.						
	a. Attach the socket part of the snap fastener to flap linings through reinforcement pieces, as indicated by marks on pattern. Each flap shall have one each except cargo flaps which shall have two each.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make hip, side and cargo pocket flaps. (cont'd)						
	b. Hip flaps and side flaps only. Stitch flap lining to flap. Trim point if necessary, turn, work out points and edges and edge stitch 1/8 to 3/16 inch from edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	30 30 30	30 50 30	
	c. Cargo flaps only. Fold cargo flaps in half and stitch sides. Trim corners, if necessary, turn, work out corners and edges and edge stitch 1/8 to 3/16 inch from edge.	301 or 401 and 301 301	SSe-2(a) SSe-2(a) SSe-2(b) and OSf-1 OSf-1	10-14 10-14 10-14 10-14	30 30 30 30	30 50 30 30	
	- or -						
	d. Fold cargo flaps in half; turn in side edges and edge stitch 1/16 to 1/8 inch from sides and bottom folded edge.	301 301	SSc-1 and OSf-1 OSf-1	12-14 12-14	30 30	30 30	
	- or -						
	e. Turn in all raw edges; fold cargo flap in half and edge stitch 1/16 to 1/8 inch from side and turned-in bottom edge.	301	SSc-1	12-14	30	30	
9.	Make compass pocket.						
	a. Make hem 1-1/4 ± 1/4 inches wide on top of pocket with raw edges turned in.	301	EFb-1	10-14	30	30	
	b. Make a 3/4 to 7/8 inch cut length buttonhole in the center of hem (1/4 inch off center tolerance) with the inside edge of eyelet 3/8 to 1/2 inch from top of pocket.	Button-hole		46-52 per button-hole	30	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Make compass pocket. (cont'd)						
	c. Fold pocket as indicated by notches, seam side edges, turn and edge stitch 3/16 to 1/4 inch from edge. Stitching may extend along bottom folded edge of pocket.	301	SSe-2 and	10-14	30	30	
		301	OSf-1	10-14	30	30	
	- or -						
	d. Fold pocket as indicated by notches, seam and overedge the sides.	515 or 516 or 519	SSa-2	10-14	30 (chain) and 70 (overedge)	50 70	
10.	Make cargo pockets						
	a. Make a 3/4 to 7/8 inch length buttonhole on each pocket at marks indicated on pattern with the eyelet end toward top of pocket.	Buttonhole		46-52 per buttonhole	30	50	
	b. Fold the two front pleats at marks indicated on pattern and stitch along the fold, 1/8 to 3/16 inch from edge.	301	OSf-1	10-14	50	50	
	c. Fold pleats, as indicated by marks on pattern, toward back of pocket and stitch across top and bottom of pleats to hold in position.	301 or		6-14	30	30	
		101 or		6-14	30		
		401		6-14	30	50	
	d. Stitch facing to top of the inside of pocket with the raw edges turned in and with the stitching 3/32 to 1/8 inch from edges.	301 or	LSk-2	10-14	30	30	
		401	LSk-2	10-14	30	50	
	- or -						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Make cargo pockets. (cont'd)						
	e. Stitch the facing to the top of pocket, turn and edge stitch 3/32 to 1/8 inch from edge.	301 or 401 and 301	SSc-2(a) SSc-2(a) SSe-2(b)	10-14 10-14 10-14	30 30 30	30 50 30	
	- and -						
	f. Turn in the raw edge of the facing and stitch to pocket.	301	LSd-1	10-14	30	30	
	g. Bartack horizontally across fold of pleats with 1/2 to 3/4 inch bartacks. The bartacks shall be not more than 1/8 inch from the lower row of facing stitching.	Bartack		28 per bartack	30	30	
	h. Fold outside edge of bellows and stitch along folded edge (through facing) 1/8 to 3/16 inch from edge.	301	OSf-1	10-14	30	30	
	i. Fold bellows pleat at bottom of pocket; fold back side seam allowance in line with folded edge of pleat. Stitch across bottom of pleat catching side seam allowance in the stitching.	301	--	6-14	30	30	
	j. Position the tie tape to the inside of pocket, aligned with the buttonhole and with the folded edge toward the back of pocket 3/4 $\pm$ 1/4 inch from buttonhole. The short end of the tie tape shall be against the inside of the pocket. Bartack the tie tape to the pocket with a 1/2 to 3/4 inch bartack 1/8 to 1/4 inch from the folded edge.	Bartack	--	28 per bartack	30	30	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUST

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Make left fly.						
	a. Overedge back edge of left fly.	502 or	EFd-1	6-14	70	70	
		503 or	EFd-1	6-14	70	70	
		504	EFd-1	6-14	70	70	
	b. Position the left half of the slide fastener with the bottom of the chain 1/2 to 3/4 inch above the fly notch and so that in the finished trousers the edge of the chain is 5/8 to 7/8 inch from the front edge of fly and the top end of the chain is 2 to 2-1/4 inches from the top of trousers. Stitch the tape, with the top of the tape extension turned under, through the fly with two rows of stitching the first row 1/8 to 3/16 inch back of chain and the second row 1/16 to 1/8 inch from back edge of tape. Bartack across top of tape extension with a horizontal bartack.	301	SSa-2 and	10-14	30	30	
		301	LSd-1	10-14	30	30	
		Bartack	--	28 per bartack	30	30	
12.	Make right fly.						
	a. Stitch fly lining to fly, turn and edge stitch 1/16 to 1/8 inch from edge. The lining shall not be exposed along the front edge.	301 or	SSe-2(a)	10-14	30	30	
		401 and	SSe-2(a)	10-14	30	50	
		301	SSe-2(b)	10-14	30	30	
	b. Overedge back edge of fly lining and fly together.	502 or	SSa-1	6-14	70	70	
		503 or	SSa-1	6-14	70	70	
		504	SSa-1	6-14	70	70	
	c. Position the right half of the slide fastener 1/8 inch in from the back edge of the right fly with the button end of chain 1/2 to 3/4 inch above the fly notch. With the top end of the tape extension turned to one side (for catching in seam at a subsequent operation), stitch fastener tape to fly.	301	SSa-1	10-14	30	30	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Attach flies to fronts.						
	a. Stitch left fly to left front across top and down front to notch with notches matching; trim corner, turn and stitch 1/16 to 1/8 inch from edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	30 30 30	30 50 30	
	b. Stitch right fly to right front matching notches and catching fastener tape in the seam; turn seam toward side of trousers and raise stitch through all plies from top of trousers to base of fly, 1/16 to 1/8 inch from edge.	301 or 401 and 301	LSq-2(a) LSq-2(a) LSq-2(b)	10-14 10-14 10-14	30 30 30	30 50 30	
14.	Make side pockets.						
	Finished appearance. The pocket openings shall finish not less than 6-1/4 inches.						
	a. Overedge the bottom edge of side pocket facings and around curved edge of side pocket bearers (optional; see operation 14.d).	502 or 503 or 504	EFd-1 EFd-1 EFd-1	6-14 6-14 6-14	70 70 70	70 70 70	
	b. Place side pocket bearers on side pocketing at marks indicated on pattern and stitch to pocket around curved edge 1/16 to 1/8 inch from edge.	301 or 401	LSbj-1 LSbj-1	10-14 10-14	30 30	30 50	
	c. Place side pocket facings on side pocketing and stitch to pocket along bottom edge 1/16 to 1/8 inch from edge.	301 or 401	LSbj-1 LSbj-1	10-14 10-14	30 30	30 50	
	- or -						
	d. Stitch bearers and facings to pocketing with the raw edge turned in.	301 or 401	LSd-1 LSd-1	10-14 10-14	30 30	30 50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
14.	Make side pockets. (cont'd)						
	NOTE: When facing is cut on selvage, the edge need not be overedged nor turned in.						
	e. Stitch facing end of pocketing to outside of trouser fronts from top of trousers to side edge; slash corner, turn to inside, force out edges and top stitch with two rows of stitching 1/4 to 5/16 inch apart, with the outside row 1/16 to 1/8 inch from edge.	301 or 401 and 301	SSe-3(a) SSe-3(a) SSe-3(b)	10-14 10-14 10-14	30 30 30	30 50 30	
	f. Fold pocketing; stitch across bottom and up side to notch; turn and edge stitch 1/4 to 5/16 inch from edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	30 30 30	30 50 30	
	- or -						
	g. Fold pocketing; stitch across bottom and up side to notch.	301	SSa-1	10-14	30	30	
	- and -						
	h. Overedge the raw edges together.	502 or 503 or 504	SSa-1 SSa-1 SSa-1	6-14 6-14 6-14	70 70 70	70 70 70	
	- or -						
	i. Fold pocketing; stitch and overedge in one operation across bottom and up side to notch, leaving a chain 3/8 to 3/4 inch long at the end of the seam (end at folded edge of pocketing).	515 or 516 or 519	SSa-2	10-14	30 (chain) and 70 (overedge)	50 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
14.	Make side pockets. (cont'd)						
	j. Position trouser front on bearer. Stitch trouser to bearer above and below the pocket opening with two rows of stitching securely tacking the end of stitching. The stitching shall be adjacent to or superimposed on the edge stitching on trouser fronts.	301	LSb-2	10-14	30	30	
15.	Make hip pockets and attach combination label.						
	a. Overedge the bottom edge of pocket bearer (optional; see operation 15.c).	502 or 503 or 504	EFd-1 EFd-1 EFd-1	6-14 6-14 6-14	50 50 50	50 50 50	
	b. Stitch pocket bearer to pocketing as indicated by marks on pattern along the bottom edge, 1/16 to 1/8 inch from edge.	301 or 401	LSbj-1 LSbj-1	10-14 10-14	30 30	30 50	
	- or -						
	c. Turn in the bottom raw edge of the bearer and stitch to pocketing 1/16 to 1/8 inch from edge.	301 or 401	LSd-1 LSd-1	10-14 10-14	30 30	30 50	
	NOTE: When bearer is cut on selvage, the edge need not be overedged nor turned under.						
	d. Center the label on the right pocket so that on the finished trousers the label will face the wearer. The label shall be below the pocket opening. Stitch on all four sides. The stitching shall not be through the printing.	301	LSbj-1	10-14	30	30	
	e. Position flaps as indicated by patterns and stitch to trousers through pocketing.	301	LSq-2(a)	10-14	30	30	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 74 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Make hip pockets and attach combination label. (cont'd)						
	f. Position cord facing piece as indicated by pattern and stitch to trousers through pocket on underside.	301	BSm-3(a)	10-14	30	30	
	g. Cut opening through trousers and pocketing; turn facing through cut opening and raise stitch forming a 1/8 to 1/4 inch cord edge.	301	BSm-3(b)	10-14	30	30	
	h. Turn in raw edge of cord facing piece and stitch to pocketing. When cord facing piece is cut with selvage or has been overedged, the edge need not be turned in.	301	LSd-1	10-14	30	30	
	i. Seam side raw edges of pocket; turn and edge stitch. Edge stitching may extend across the bottom folded edge.	301 or 401 and 301 301	SSe-2(a) SSe-2(a) SSe-2(b) and OSf-1	10-14 10-14 10-14 10-14	30 30 30 30	30 50 30 30	
	j. Turn down flap and raise stitch 1/16 to 1/8 inch through trouser flap, pocket bearer and pocket, closing top of pocket.	301	LSq-2(b)	10-14	30	30	
	- or -						
	Alternate method						
	k. Stitch hip pocket bearer to pocketing with raw edge turned in and single stitch 1/16 to 1/8 inch from edge.	301	LSd-1	10-14	30	30	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN/ LOOPER	THREAD COVER
15.	Make hip pockets and attach combination label. (cont'd)						
	l. Fold cord facing piece in half lengthwise, place on lower end of pocketing with raw edges together, and seam and overedge.	515 or 516 or 519	SSj-2	10-14	30 (chain) and 70 (overedge)	50 70	
	m. Cut pocket openings on trouser backs.						
	n. Turn under the lower edge of pocket opening and single stitch 1/16 to 1/8 inch from folded edge through welt piece; the welt shall finish 3/16 to 1/4 inch wide. The raw edges of seams joining welt to pocket, shall finish inclosed between the trousers and pocketing.	301	LSd-1	10-14	30	30	
	o. Fold pocketing to form pocket; seam and overedge the side in one operation, catching the edges of the bearer and cord facing. Bearer and cord facing width may be extended 1/2 inch to assure compliance with this requirement.	515 or 516 or 519	SSa-2	10-14	30 (chain) and 70 (overedge)	50 70	
	p. Position the pocketing under pocket opening.						
	q. Turn under the top edge and ends of pocket opening, insert top of flap 1/4 to 3/8 inch and single stitch through trousers catching the end of the flap, the facing, and the pocketing with ends of stitching securely backstitched.	301	LSd-1	10-14	30	30	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Make hip pockets and attach combination label. (cont'd) r. Operations e. through q. may be performed by an automatic machine which sets the flap, stitches, cuts, and turns piped edges in one operation. Facing edge shall be turned under and stitched to pocket as in operation 11.h. When this method is used, the ends of the pocket opening shall be securely tacked. Raise stitching of lower edge shall be through the trouser back and piping piece only, 1/16 to 1/8 inch from seam. The raw edges of seams joining facing cord to pocket shall finish inclosed between outside of the pocket and trousers.						
16.	Join outseams. Join outseams with a double-lapped, double-stitched seam, forming knee pleats as indicated on patterns (two each leg) and with the fronts of trousers over the backs. The outside folded edge of the pleats shall face toward bottom. The pleats may be stitched down prior to seaming.	401	LSc-2	10-14	50	70	
17.	Attach side pocket flaps. Position flaps parallel to and 1/8 to 1/4 inch from the pocket openings and stitch to trousers 1/8 to 3/16 inch from flap raw edge through pocketing, turn flap down over pocketing and raise stitch 1/4 to 5/16 inch from edge. Bartack the ends of flaps with bartacks positioned on raise stitching.	301 Bartack	LSs-2 --	10-14 28 per bartack	30	30	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 74 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
18.	Attach cargo pockets and flaps.						
	Finished appearance. The pockets shall be positioned with the side having the bellows pleat toward the back of trousers. All pleats shall be turned toward the back. The flaps shall cover the sides of the pockets.						
	a. Mark position for the cargo pockets and flaps as indicated by marks on pattern.						
	b. Turn in the seam allowance on the bellows side of pocket. Stitch bellows side of pocket to trousers, positioned as marked, with two rows of stitching 3/16 to 5/16 inch apart, with the outside row 1/16 to 1/8 inch from edge. The end of the seam shall catch the turned-under seam allowance at bottom of pocket.	301 or 401	LSd-2 LSd-2	10-14 10-14	30 30	30 50	
	c. Turn in other side and bottom seam allowance of pocket and stitch to trousers with two rows of stitching 3/16 to 5/16 inch apart, with the outside row 1/16 to 1/8 inch from edge.	301 or 401	LSd-1 LSd-1	10-14 10-14	30 30	30 50	
	d. Position flap on marks parallel to pocket opening; stitch to trousers, turn and raise stitch 1/4 to 5/16 inch from edge.	301	LSs-2	10-14	30	30	
	- or -						
	e. If alternate operation 8.e is used, position folded edge of flap on marks parallel to pocket opening and stitch to trousers with two rows of stitching, 3/16 to 1/4 inch gage, 1/16 to 1/8 inch from edge.	301	LSbj-1	10-14	30	30	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
18.	Attach cargo pockets and flaps. (cont'd)						
	f. Stitch flap to pocket through trousers along front edge, 3/16 to 5/16 inch from edge with the end of the stitching extended beyond the flap onto the pocket for not less than 1/2 inch.	301		10-14	30	30	
19.	Join seat seam.						
	Join seat seam with a double-lapped, double-stitched seam, with the right back over the left.	401	LSc-2	10-14	30	50	
20.	Join crotch seam.						
	a. Turn crotch seam of right front to the outside and stitch along edge, catching the end of right fly.	301 or 401	LSdc-3(a) LSdc-3(a)	10-14 10-14	30 30	30 50	
	b. Turn edge of left front crotch seam to the inside and stitch with two rows of stitching 3/16 to 5/16 inch apart, catching the front crotch seam with both rows of stitching through the right fly lining.	301 or 401	LSdc-3(b) LSdc-3(b)	10-14 10-14	30 30	30 50	
21.	Join inseams.						
	Join inseams with a double-lapped, double-stitched seam, forming knee pleats as indicated on patterns (two each leg) and with the fronts over the backs. The outside folded edge of the pleats shall face toward the bottom. The pleats may be stitched down prior to seaming.	401	LSc-2	10-14	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
22.	Attach button tabs. a. Position six button tabs on inside of trousers at waist with raw end(s) of tab 1-3/8 ± 1/8 inches from top raw edge of trousers. b. Bartack tabs to trousers with a horizontal bartack, centered on tab not less than 3/16 inch down from raw end of tab. c. Position tabs for each size, with measurements taken to center of tab, as follows: One tab 2-3/4 ± 1/4 inches each side of the seat seam. One tab 2 ± 1/4 inches back of each outseam. One tab 3 ± 1/4 inches from front finished edge of left fly. One tab 4 ± 1/4 inches from front finished edge of right fly.	Bartack		28 per bartack	30	30	
23.	Attach waistband lining and belt loops. a. Position the belt loops as follows: (1) One on right and one on left front 1/2 to 3/4 inch in front of seam joining bearer to front except for X-small sizes which shall be positioned 1 to 1-1/4 inches in back of each seam joining bearer to front. (2) One adjacent to each outseam on backs. (3) One to left of and adjacent to seat seam. (4) One each midway between outseam and seat seam.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
23.	Attach waistband lining and belt loops. (cont'd)						
	b. Stitch the waistband lining to trousers with two rows of stitching 1-1/2 ± 1/8 inches apart, with belt loops caught in the top row of stitching and the tops of pockets inserted between the trousers and waistband, and with the raw edges on right end of waistband measure 1-3/4 ± 1/8 inches wide.	301 or 401	LSk-2 LSk-2	10-14 10-14	30 30	30 50	
	- or -						
	c. Stitch waistband lining to the outside top edge of trousers with the belt loops caught in the stitching. Turn lining to inside and edge stitch 1/16 to 1/8 inch from edge.	301 or 401	SSe-2 SSe-2	10-14 10-14	30 30	30 50	
	- and -						
	d. Turn in raw edge on bottom edge and right end and stitch to trousers with the tops of pockets inserted between the waistband lining and trousers. The finished waistband lining shall measure 1-3/4 ± 1/8 inches wide.	301 or 401	LSd-1 LSd-1	10-14 10-14	30 30	30 50	
	NOTE: When optional operation 16.b is exercised, the outseams shall be turned toward back when attaching waistband lining.						
	e. Stitch the turned in right end of waistband lining to the edge of fly.	301	SSb-1	10-14	30	30	
	f. Bartack top and bottom ends of belt loops to trousers with the bottom end turned in.	Bartack		28 per bartack	30	30	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
23.	Attach waistband lining and belt loops. (cont'd)						
	g. As an alternate, loops may be attached after waistband has been completed. Position the belt loops as indicated and with the ends turned in, bartack to trousers at top and bottom. The belt loops, in either case shall measure 2 ± 1/4 inches between bartacks.	Bartack		28 per bartack	30	30	
24.	Finish left fly.						
	Stitch back edge of left fly to trousers from top to base, with the waistband inserted between the plies and with the stitching continued across top of fly to front edge of fly. The width of the fly from stitching to front edge shall be 1-5/8 to 1-3/4 inches.	301		10-14	30	30	
25.	Set compass pocket.						
	a. Position compass pocket on inside of trousers with the back edge of pocket 1 to 1-1/2 inches in front of right side seam, for all sizes except X-small which shall be positioned 3/4 to 1 inch from right side seam. Seam top of pocket to trousers along the top row of stitching. Top of pocket shall not extend above top of waistband.	301	LSa-1	10-14	30	30	
	b. Turn down pocket and with raw edges turned in, stitch sides of pocket to trousers-3/16 to 1/4 inch from edge, from top of pocket to bottom of waistband, through pocket, waistband lining and trousers.	301		10-14	30	30	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
25	Set compass pocket. (cont'd)						
	- or -						
	c. Turn down pocket and stitch four vertical bartacks, through pockets, waistband lining and trouser, positioned as follows: - one on each side of pocket opening 3/16 to 1/4 inch in from sides with top of bartacks at top of pocket. - one on each side of pocket 3/16 to 1/4 inch from sides, with bottom of bartacks at bottom of waistband lining.	Bartack		28 per bartack	30	30	
26	Attach two waistband adjustment straps.						
	a. Position buckle attachment strap adjacent to or on each side seam at center of waistband (1/4 inch tolerance off center permitted). Box stitch or bartack with two bartacks 1/8 to 3/16 inch apart, 1/16 to 1/8 inch from folded edge.	301 or bartack		10-14 28 per bartack	30	30	
	b. Thread free end under back belt loops; extend full available length; turn under raw edge and box stitch or bartack with two bartacks 1/8 to 3/16 inch apart, 1/16 to 1/8 inch from folded edge (see figure 1).	301 or bartack		10-14 28 per bartack	30	30	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
27.	Attach suspender loops.						
	a. Position both ends of each front suspender loop at a 45 degree (± 10 degrees) angle on inside of trousers in the center of waistband (1/4 inch tolerance off center permitted) on right and left front, 1/4 to 1/2 inch in front of side seam with the end extending 4 to 4-1/2 inches for all X-small sizes and 5 to 5-1/2 inches for all other sizes, toward front of trousers, turn under raw ends 3/8 to 1/2 inch and bartack with two bartacks at each end 1/8 to 1/4 inch apart.	Bartack		28 per bartack	30	30	
	b. The ends of front suspender loops may be inserted and caught in the top row of stitching of waistband lining (operation 23.b) and then bartacked through top of trousers.	Bartack		28 per bartack	30	30	
28.	Attach size label.						
	Position size label to the center back not more than 1 inch below waistband, and stitch on all four sides not more than 3/16 inch from edge. The top of the size label may be caught in the lower row of waistband stitching (operations 23.b and d) providing the other three sides are stitched to the trousers.	301	LSbj-1	10-14	30	30	
29.	Make waistband buttonhole.						
	Make a 7/8 inch cut length buttonhole in center of the waistband with the inside edge of eyelets 1/2 ± 1/8 inch from edge of fly.	Buttonhole		46-50 per buttonhole	30	30	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
30.	Mark or gage and sew on buttons.						
	a. Sew a 30-line button on the right fly to correspond with buttonhole in left fly.	301 or		14-16 per button	30	30	
		101		14-16 per button	30		
	b. Sew a 30-line button on watch pocket through trousers to correspond with buttonhole.	301 or		14-16 per button	30	30	
		101		14-16 per button	30		
31.	Make buttonhole in trouser hem.						
	a. Make two 1/2 to 5/8 inch eyelet-end taper-bar buttonholes on the front of each leg positioned at bottom as indicated on pattern. The buttonholes shall be reinforced with a piece of basic fabric (see operation 1.d). The eyelet end of each buttonhole shall be toward center front of trousers.	Buttonhole		42-46 per buttonhole	30	30	
	- or -						
	b. Make two 1/2 to 5/8 inch straight cut buttonholes through reinforcements (see operation 1.d), positioned as indicated on pattern.	304		52-56 per buttonhole including tack	30	30	
	c. Make two sewn eyelets, through reinforcements, positioned as indicated for the eyelet end of the buttonhole.	Eyelet		38-42 per eyelet	30	30	
	d. Thread drawcord braid through buttonholes or eyelets, with the drawcord extending around the bottom of each leg and criss-crossed between buttonholes. Knot each end of drawcord.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
31	Make buttonhole in trouser hem. (cont'd)						
	NOTE: The reinforcements may be stitched into position.						
32	Hem bottom.						
	a. Turn up leg bottom as indicated by marks on pattern; turn in raw edge 1/4 to 3/8 inch; inclose drawcord and single stitch 1/16 to 1/8 inch from edge. The drawcord shall not be caught in the stitching. When optional operations 16.b and 21.b are exercised, the outseams and inseams shall be turned toward the back.	301	EFb-1	10-14	30	30	
	b. Anchor the drawcord to trousers at center back of leg through the finished hem; or the drawcord may be bartacked through one ply of hem prior to hemming leg bottom.	Bartack		28 per bartack	30	30	
33	Bartack fly and ends of pockets.						
	a. Bartack the fly diagonally or horizontally at base of fly stitching at the junction of the crotch seam and fly.	Bartack		28 per bartack	30	30	
	b. Place a vertical bartack on left fly stitching 1 to 1-1/2 inches above first bartack catching the right fly in the stitching.	Bartack		28 per bartack	30	30	
	c. Secure the ends of the side pocket openings with bartacks positioned at right angle to opening.	Bartack		28 per bartack	30	30	
	d. Bartack ends of the hip pocket openings with vertical bartacks.	Bartack		28 per bartack	30	30	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
33.	Bartack fly and ends of pockets. (cont'd)						
	e. Bartack the front and back lower corners and the back end of opening of each cargo pocket with a vertical bartack.	Bartack		28 per bartack	30	30	
	f. Bartack the back upper corner of flaps with a horizontal bartack.	Bartack		28 per bartack	30	30	
	g. Bartack the front lower corner of flaps with a vertical bartack through the row of stitching.	Bartack		28 per bartack	30	30	
34.	Attach leg loop.						
	a. Position leg loop on the inseam with length of loop centered over crotch seam. Turn in raw edge at each end and bartack to inseams. The length of loop from end to end shall measure 3-3/4 to 4 inches.	Bartack		28 per bartack	30	30	
	b. Place an additional bartack through loop and inseam adjacent to either side of crotch seam.	Bartack		28 per bartack	30	30	
35.	Attach snap fastener studs to pockets.						
	Securely attach stud part of snap fastener to all pockets to correspond with socket parts on pocket flaps. Neither the pocket nor flap shall be twisted or puckered when snapped.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
36.	Prepare for packing. a. Trim all thread ends and remove loose threads. b. Remove all spots, stains and shade tickets. c. Knot ends of drawcords. d. Close slide fastener.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

3.9 Measurements. The finished trousers shall conform to measurements shown in table IV. The tolerance for waist measurements shall be + 3/4, - 1/2 inch and for inseams and outseams shall be ± 3/4 inch. The tolerance for knee and bottom measurements shall be ± 1/2 inch.

TABLE IV. Table of measurements (in inches)

	Size				
	X-small	Small	Medium	Large	X-large
1/2 waist 1/	14-1/2	16-1/2	18-1/2	20-1/2	22-1/2
Inseams 2/					
-X-short	23-1/2	23-5/8	23-3/4	---	---
-Short	26-1/2	26-5/8	26-3/4	26-7/8	27
-Regular	29-1/2	29-5/8	29-3/4	29-7/8	30
-Long	32-1/2	32-5/8	32-3/4	32-7/8	33
Outseams 3/					
-X-short	34	34-1/2	35	---	---
-Short	37-1/2	38	38-1/2	39	39-1/2
-Regular	41	41-1/2	42	42-1/2	43
-Long	44-1/2	45	45-1/2	46	46-1/2
1/2 knee 4/ -(all lengths)	11-3/4	12-1/4	12-3/4	13-1/4	13-7/8
1/2 bottom 5/ -(all lengths)	10-3/8	10-5/8	10-7/8	11-1/8	11-3/8

1/ Half waist measurement taken along top of waistband, with waistband buttoned, from folded edge to folded edge.

2/ Inseam taken from center of crotch seam to bottom edge of leg.

3/ Outseam measurement taken from top of waistband to bottom of leg along seam.

4/ Location of knee measurement shall be 13 inches from bottom of trousers for X-short, 16 inches for short, 17-1/2 inches for regular, and 19 inches for long. The measurement shall be taken from folded edge to folded edge.

5/ Half bottom measurement shall be taken at bottom edge of trouser from folded edge to folded edge.

3.10 Workmanship. The finished trousers shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable acceptable point values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for assuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.2), it shall be examined in accordance with the provisions of MIL-STD-1488 for end item visual defects for utility trousers and dimensional defects.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be tested in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase documents.

4.4.2 Point count inspection. Sampling and inspection provisions for end item examination of utility "U" trousers, dimensional examination, and packaging inspection shall be performed in accordance with MIL-STD-1488.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:34Z
Check the source to verify that this is the current version before use.

4.4.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each of the trousers, with the inseams meeting, shall be folded from the leg bottom up toward the waistband to an overall length of approximately 21 inches. For larger sizes, it may be necessary to adjust the seat area with a tuck to achieve the desired width of approximately 13-1/2 inches.

5.1.2 Commercial. The trousers shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2).

5.2.1 Level A packing. Twenty trousers of one class and one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container, conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat, 20 in depth within a shipping container. Inside dimensions of each shipping container shall approximate 21 inches in length, 13-1/2 inches in width and 23 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V,

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:34Z
Check the source to verify that this is the current version before use.

and reinforced as specified in the appendix of PPP-B-636. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Twenty pairs of trousers of one class and size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, 20 in depth within a shipping container. Inside dimensions of each container shall approximate 21 inches in length, 13-1/2 inches in width, and 23 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.2.

5.2.3 Commercial packing. Trousers of one class and one size only, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), trousers, packed as specified in 5.2.2 and 5.2.3, shall be palletized on a 4-way entry pallet in accordance load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951.

6. NOTES

6.1 Intended use. The trousers are intended for wear by military personnel of the Department of Defense as a part of the field combat and field training clothing in cold weather.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Class and size required (see 1.2).
c. When a first article sample is required (see 3.2, 4.3 and 6.4).
d. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
e. Type and class of unit load required (see 5.2.1).
f. When weather-resistant fiberboard shipping containers are required for level B packing (see 5.2.2.1).
g. When palletization is required (see 5.3).

6.3 Sample and shade samples. For access to sample of the end item and shade samples, address the contracting activity issuing the invitation for bids.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.5 Color of label. The following cable numbers of the Standard Color Card of America are furnished for information and guidance as to the intensity of the shade of "Medium Green" desired for the labels specified:

Cable No. 70034
Cable No. 70130
Cable No. 70131

6.6 Subject term (key word) listing.

Combat clothing
Training clothing
Trousers, cold weather

6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Review activities:

Army - MD
Navy - MC
Air Force - 82
DLA - CT

User activity:

Air Force - 45

Preparing activity:

Army - GL

Project No. 8415-0599

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

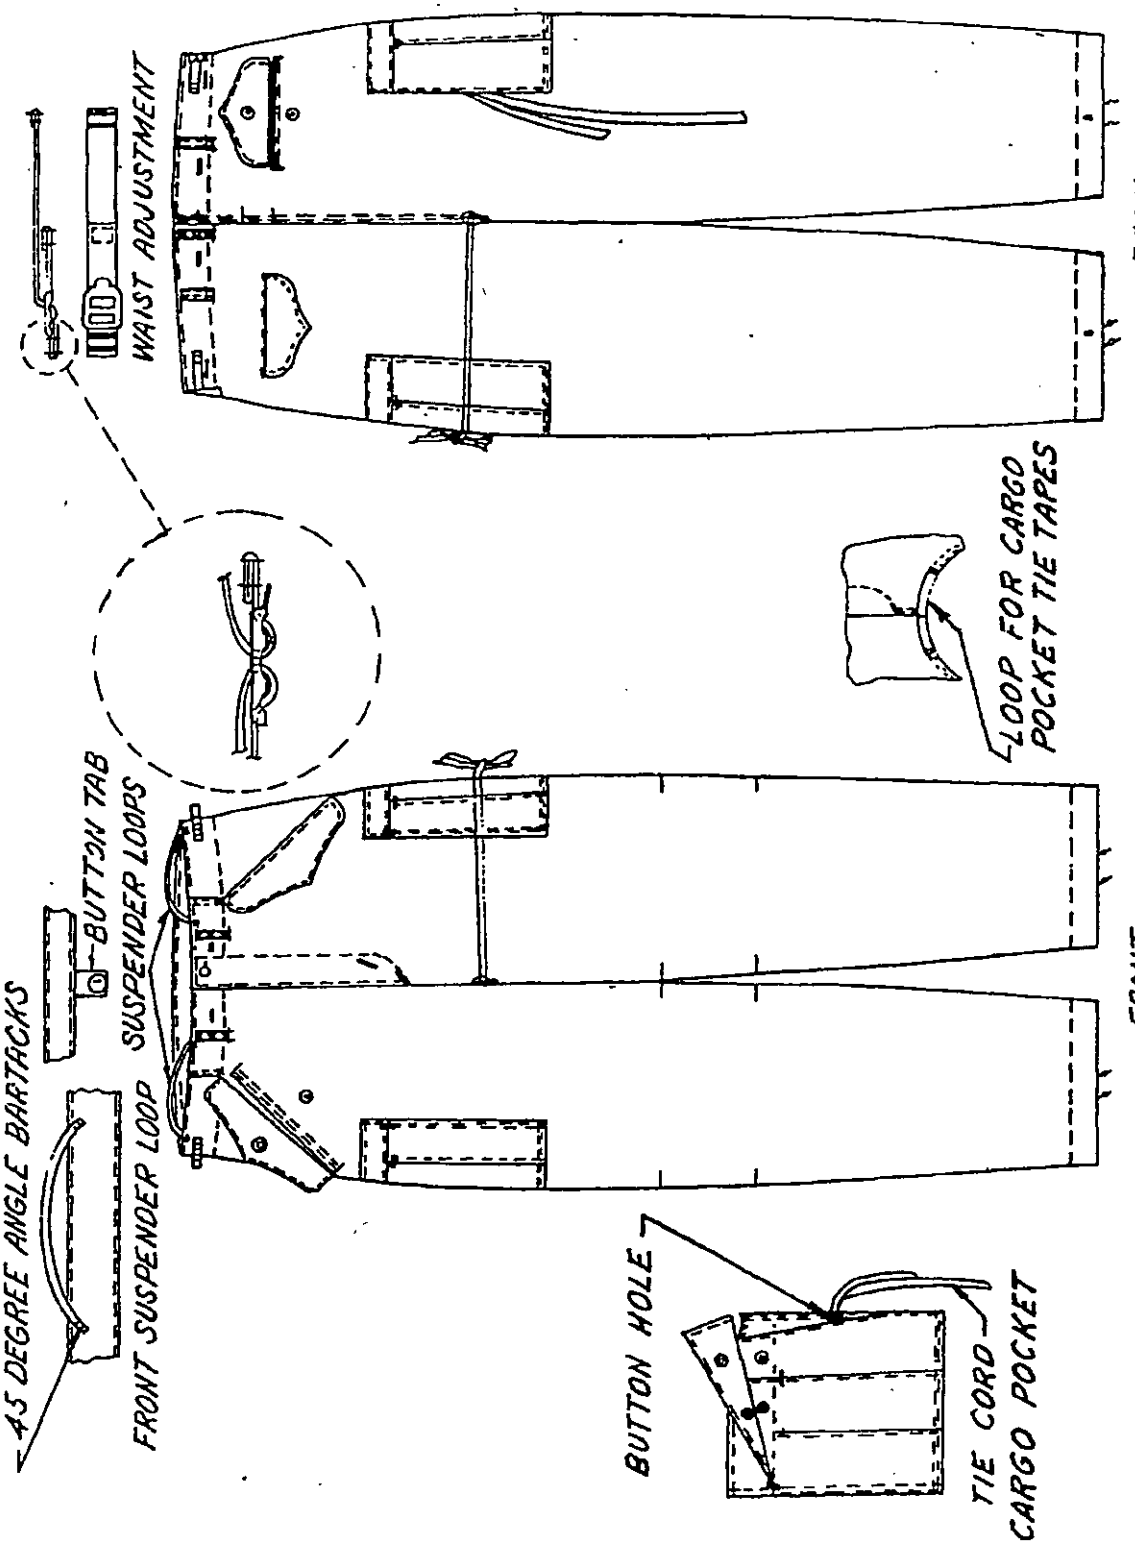


FIGURE 1 TROUSERS, COLD WEATHER, FIELD, NYLON AND COTTON 2-1-736A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

U.S. ARMY NATICK RESEARCH, DEVELOPMENT
and ENGINEERING CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Natick Research, Development
and Engineering Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-43497D	Trousers, Cold Weather, Field, Nylon and Cotton

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP-1, Feb 86

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:34Z
Check the source to verify that this is the current version before use.