INCH-POUND

MIL-PRF-81757/2C
w/AMENDMENT 1
13 May 2026
SUPERSEDING
MIL-PRF-81757/2C
1 March 1999

PERFORMANCE SPECIFICATION SHEET

BATTERY, STORAGE, AIRCRAFT, NICKEL-CADMIUM, VENTED FILLER CAP

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-81757.


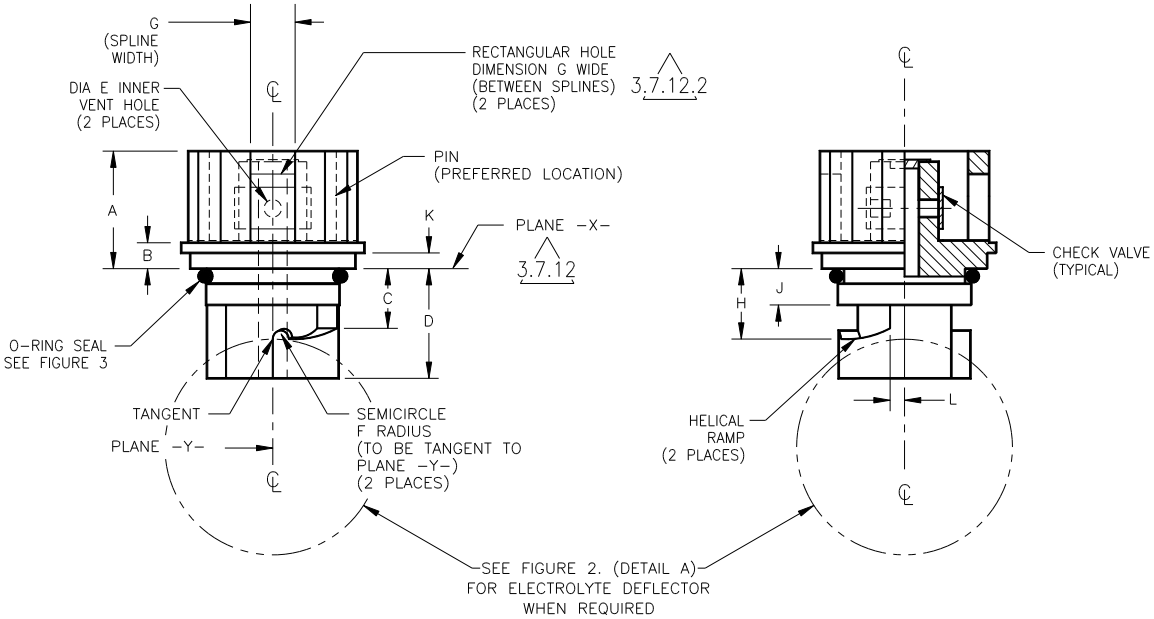


FIGURE 1. Dimensions and configuration for PIN M81757/2-X.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:04Z
Check the source to verify that this is the current version before use.

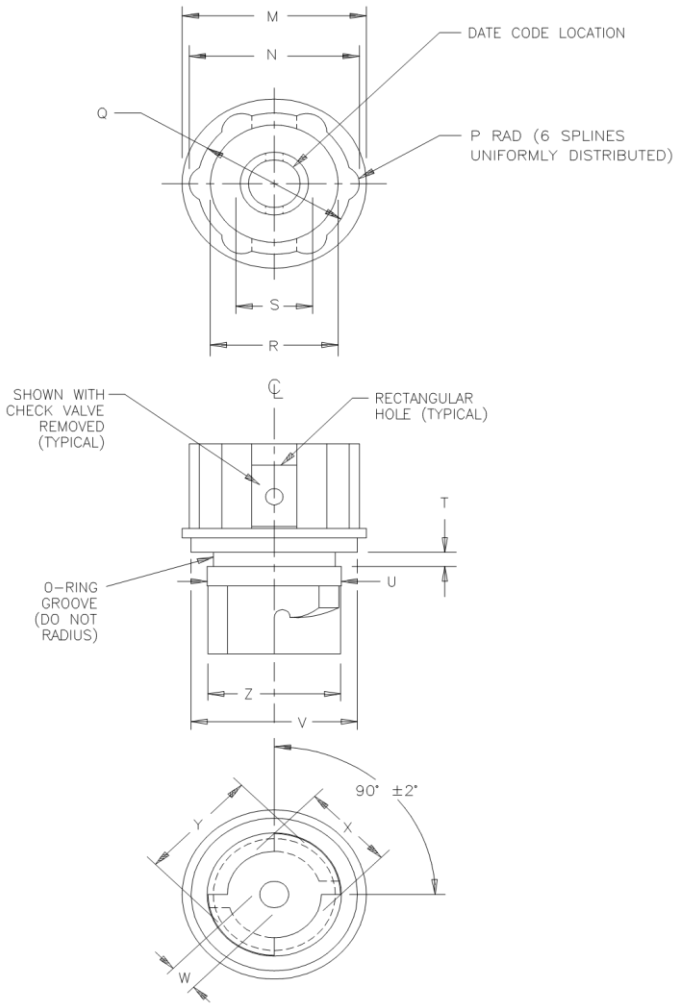

BODY SIZE	LIMITS	PARAMETER DIMENSIONS IN INCHES											
		A	B	C	D	E	F	G	H	J	K	L	M
LARGE	MAX.	.562	.127	.282	.535	.090	.040	.200	.334	.192	.085	.070	.885
	MIN.	.532	.107	.276	.505	.060	.030	.180	.324	.166	.065	.060	.855
SMALL	MAX.	.428	.100	.221	.395	.090	.037	.175	.253	.145	–	.060	.690
	MIN.	.408	.080	.215	.365	.062	.027	.155	.247	.135	–	.050	.670

FIGURE 1. Dimensions and configuration for PIN M81757/2-X - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:04Z
Check the source to verify that this is the current version before use.

BODY SIZE	LIMITS	PARAMETER DIMENSIONS IN INCHES											
		N	P	Q	R	S	T	U	V	W	X	Y	Z
LARGE	MAX.	.817	.108	.735	.610	.353	.100	.637	.795	–	.470	.610	.637
	MIN.	.787	.078	.705	.580	–	.090	.607	.765	.140	.450	.580	.597
SMALL	MAX.	.617	.077	.576	.474	.343	.090	.505	–	–	.367	.430	.505
	MIN.	.597	.047	.556	.454	–	.080	.485	–	.140	.353	.410	.480

FIGURE 1. Dimensions and configuration for PIN M81757/2-X - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:04Z
Check the source to verify that this is the current version before use.


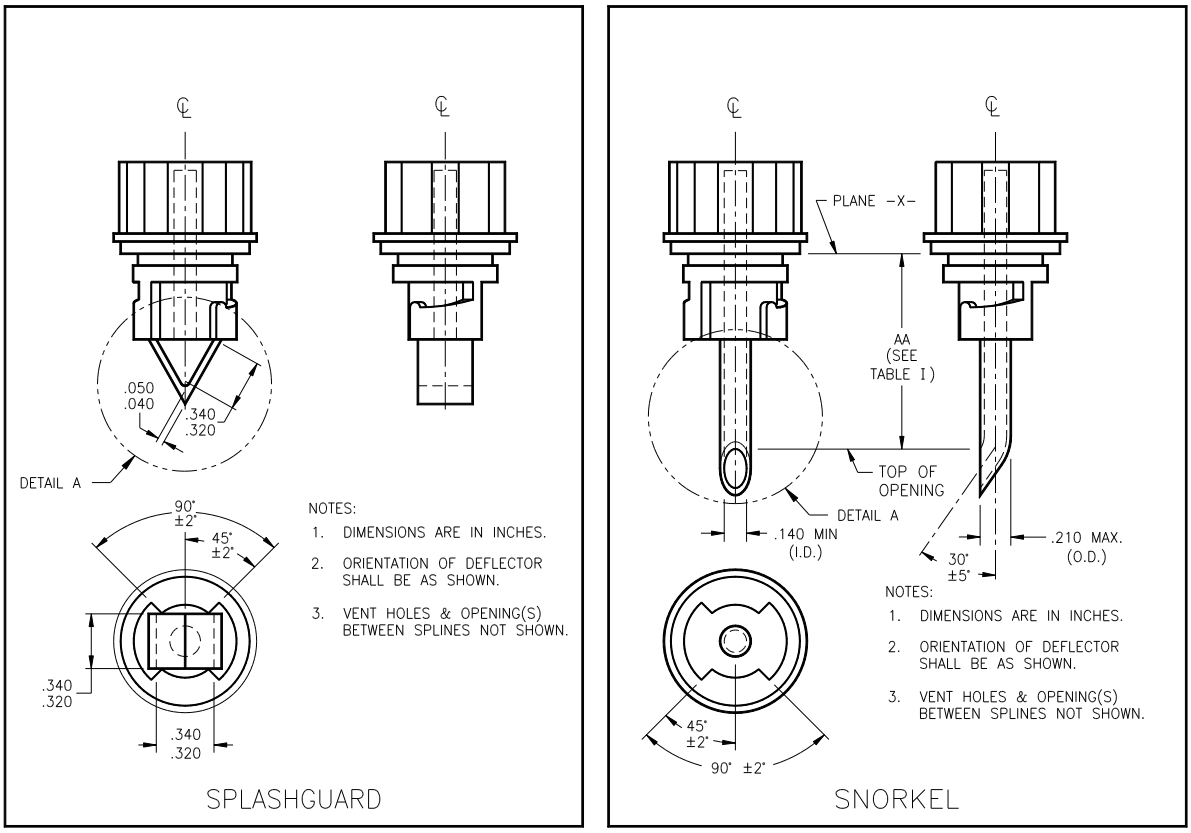


FIGURE 2. Electrolyte deflectors.

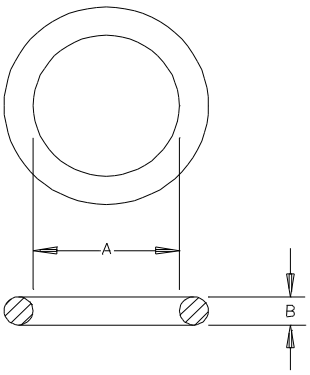

USER IDENTIFIER (SEE TABLE I)	DIMENSIONS IN INCHES	
	A ±.005	B ±.003
∇	.424	.103
‡	.592	.115

FIGURE 3. O-ring seal dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Part or identifying number. Table I is a list of the part or identifying numbers (PINs) for the vented filler caps to be purchased under this specification sheet. The table also identifies the body size, style of electrolyte deflector, color, and other construction characteristics for each PIN. Each vented filler cap supplied shall display the PIN specified in the contract, and the item shall comply with the unique requirements specified.

2. Dimensions. The dimensions of the vented filler caps shall be as specified on figure 1. The dimensions for any attached electrolyte deflector shall be as shown on figure 2 and in table I. The dimensions of the specified O-ring shall be as indicated on figure 3.

3. MIL-PRF-81757 variance. The vented filler cap shall comply with MIL-PRF-81757 except as follows.

3.1 Add the following paragraphs:

"3.7.12.1 Vents. The body of each vented filler cap shall have a vertical axis channel with two side holes to allow venting of gasses. Gasses generated within the cell shall flow upward through the channel and vent through the two side holes. Venting shall be controlled by a pressure-actuated check valve. The valve shall actuate (open) at a pressure differential not greater than 10.0 pounds per square inch (psi) and permit a continuous flow of air. The valve shall close within the 10.0 to 2.0 psi range."

"3.7.12.2 Drains. The outer perimeter of the upper body shall contain not less than two holes to drain liquids. The holes shall be centered between two splines, and their sidewalls shall not penetrate the curvature of the splines. The drain holes shall conform to that shown on figure 1 of the specification sheet."

"3.7.12.3 Check valve. The check valve shall prevent gas flow when tested in accordance with 4.5.5.4."

"3.7.12.4 Seal. Each vented filler cap assembly shall contain an O-ring that conforms to table I of the specification sheet. The O-ring seal shall not leak when tested in accordance with 4.5.5.5."

"3.7.12.5 Electrolyte deflector. When an electrolyte deflector is required, the design shall be as specified in table I and shown on figure 2, both of the specification sheet."

3.2 Modify the following paragraphs:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:04Z
Check the source to verify that this is the current version before use.

3.10.6 Visual and mechanical. Add after the first sentence: "The vented filler cap shall also be in accordance with all the requirements of 3.7.12."

4.2.2 Inspection of cells, components, and materials. Add a new last sentence, “Twenty samples each of applicable components and materials, treated and processed as they would be for fabrication of finished batteries or cells, shall be furnished for inspection in accordance with table IV herein.”

4.3.1 Inspection of product. In the first sentence, change "groups B and C" to "group C" (two places). In the second sentence, change "groups A, B, and C inspection" to "groups A and C inspection".

4.3.3 Sample size and selection for groups A, B, and C inspection. Delete the title and text and substitute: "Sample size and selection for groups A and C inspection. Each unit shall undergo group A inspection. The sample size for group C inspection is shown in table V."

4.3.5 Group B inspection. Delete the paragraph.

4.5.3 Electrolyte soak of components and elastomeric materials. Delete the entire text and substitute: "Force an aqueous solution of potassium hydroxide of 1.30 ± 0.04 specific gravity through the internal parts of the vented filler cap, including the check valve mechanism. Within 0.50 ± 0.25 hours after this, immerse the entire vented filler cap in an aqueous solution of potassium hydroxide of 1.30 ± 0.04 specific gravity in a temperature chamber at 65.5° ± 1.1°C (150° ± 2°F) for 168 ± 2 hours. Rinse with water and wipe dry. Examine the vented filler cap for the requirements of 3.10.3. Subject the vented filler cap to 4.5.6, 4.5.5.1, 4.5.5.4, and 4.5.5.5. Examine the vented filler cap for the requirements of 3.7.12, 3.8.6, 3.10.5, and 3.10.6."

3.3 Add the following paragraphs:

"4.5.5.4 Check valve seal. Slowly raise the differential pressure to 12.0 psi to the check valve over a period of not less than 1 minute. Examine the seal for bubbles or leaks. Examine the vented filler cap for the requirements of 3.7.12.3."

"4.5.5.5 O-ring seal. Remove the check valve from a vented filler cap. Attach the vented filler cap to a cell. Apply a 15 psig internal cell pressure differential to the top of the vented filler cap and immerse the cell in water. Examine the seal for bubbles or leaks. Examine the vented filler cap for the requirements of 3.7.12.4."

3.4 Modify the following paragraphs and tables:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:04Z
Check the source to verify that this is the current version before use.

4.5.6 Visual and mechanical examination. Add a new second sentence: "Examine each vented filler cap to determine whether any flash and sprue molding remnants exist, all components are correctly positioned, and the color conforms to tables I and II of the specification sheet."

4.5.8 Dimensions and weight. Delete the title and text and substitute: "Dimensions. Examine the vented filler cap to verify whether the dimensions conform to requirement 2 of the specification sheet."

6.8 Responsibility for inspection and sample selection. In the third sentence, change "groups B and" to "group." Delete the fourth sentence.

6.13.11 Inspection lot. Delete the text and substitute: "An inspection lot of vented filler caps will contain the same PIN, are produced at the same manufacturing facility, and are submitted for conformance inspection under the same contract."

6.15 PIN supersession data. Add a new second sentence: “PIN M81757/2-2 supersedes all MS3510 vented filler caps, including PIN MS3510B.”

TABLE IV. Qualification inspection of components and materials. Delete the title and contents and substitute table III contained herein.

TABLE V. Sample sizes for groups B and C testing. Delete the title and contents and substitute table IV contained herein.

TABLE VI. Group A inspection. Delete the contents and substitute table V contained herein.

TABLE VII. Group B inspection. Delete.

TABLE VIII. Group C inspection. Delete the contents and substitute table VI contained herein.

4. Referenced documents: In addition to MIL-PRF-81757, this document references: FED-STD-595.

5. Amendment notations. The margins of this specification sheet are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:04Z
Check the source to verify that this is the current version before use.

TABLE I. Part or identifying numbers and construction characteristics.

PART OR IDENTIFYING NUMBER (PIN)	LIMITS	AA DIMENSION (IN INCHES)	BODY SIZE (SEE FIGURE 1)	ELECTROLYTE DEFLECTOR (SEE FIGURE 2)	COLOR (SEE TABLE II)	O-RING (SEE FIGURE 3)
M81757/2-1	MAX.	---	LARGE	NONE	NATURAL	‡
	MIN.	---				
M81757/2-2	MAX.	---	LARGE	SPLASHGUARD	BLUE	‡
	MIN.	---				
M81757/2-3	MAX.	---	SMALL	NONE	NATURAL	∇
	MIN.	---				
M81757/2-4	MAX.	1.230	LARGE	SNORKEL 1/	GREY	‡
	MIN.	1.180				
M81757/2-5	MAX.	.925	LARGE	SNORKEL 1/	BLACK	‡
	MIN.	.875				
M81757/2-6	MAX.	1.090	SMALL	SNORKEL 1/	BLACK	∇
	MIN.	1.040				
M81757/2-7	MAX.	1.800	LARGE	SNORKEL 1/	WHITE	‡
	MIN.	1.750				
M81757/2-8	MAX.	1.600	LARGE	SNORKEL 1/	GREEN	‡
	MIN.	1.500				

1/ Use snorkel-type electrolyte deflectors for aerobatic applications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:04Z
Check the source to verify that this is the current version before use.

TABLE II. Color requirements.

SAE-AMS-STD-595 COLOR NUMBER FOR SPECIFIED COLOR				
NATURAL NYLON	BLUE	BLACK	GREEN	GREY
NONE	15180, 15182, OR 25183	17038 OR 27040	14090, 14109, 14110, OR 14115	16251

TABLE III. Qualification inspection of vented filler caps.

Test number	Examinations and tests	Requirement paragraph	Test paragraph
1	Visual and mechanical	3.10.6	4.5.6
2	Dimensions	Paragraph 2 contained herein	4.5.8
3	Room temperature	3.10.5, 3.10.6	4.5.5.1, 4.5.6
4	Check valve seal	3.7.12.3	4.5.5.4
5	O-ring seal	3.7.12.4	4.5.5.5
6	Potassium hydroxide soak of components and elastomeric materials	3.4, 3.6, 3.7.12, 3.8.6, 3.10.3, 3.10.5, 3.10.6, and table II	4.5.3, 4.5.5.1, 4.5.5.4, 4.5.5.5, 4.5.6
7	Low temperature	3.10.5, 3.10.6	4.5.5.2, 4.5.6
8	High temperature	3.10.5, 3.10.6	4.5.5.3, 4.5.6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:04Z
Check the source to verify that this is the current version before use.

TABLE IV. Sample sizes for group C testing.

Inspection lot size	Quantity of vented filler caps to be provided for testing
1 through 1000	3
1001 through 3000	6
3001 through 10,000	9
10,001 through 30,000	12
30,001 through 90,000	16

TABLE V. Group A inspection.

Test number	Examinations and tests	Requirement paragraph	Test paragraph
1	Visual and mechanical	3.10.6	4.5.6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:04Z
Check the source to verify that this is the current version before use.

TABLE VI. Group C inspection.

Test number	Examinations and tests	Requirement paragraph	Test paragraph
1	Visual and mechanical	3.10.6	4.5.6
2	Dimensions	Requirement 2	4.5.8
3	Room temperature	3.10.5, 3.10.6	4.5.5.1, 4.5.6
4	Check valve seal	3.7.12.3	4.5.5.4
5	O-ring seal	3.7.12.4	4.5.5.5
6	Potassium hydroxide soak of components and elastomeric materials	3.4, 3.6, 3.7.12, 3.8.6, 3.10.3, 3.10.5, 3.10.6, and table II	4.5.3, 4.5.5.1, 4.5.5.4, 4.5.5.5, 4.5.6
7	Low temperature	3.10.5, 3.10.6	4.5.5.2, 4.5.6
8	High temperature	3.10.5, 3.10.6	4.5.5.3, 4.5.6

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 20
DLA - CC

Preparing activity:
Navy - AS

(Project 6140-2026-002)

Review activities:
Army - AV
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST online database at: https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:04Z
Check the source to verify that this is the current version before use.