MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, ECL, MULTIPLE NOR GATES,
MONOLITHIC SILICON

This amendment forms a part of MIL-M-38510/60A,
dated 5 August 1985, and is approved for used by
all Departments and Agencies of the Department of Defense.

PAGE 3

TABLE 1, V_{OH} row, V_{IH1} column, delete “-0.720 V” and substitute “-0.780 V”, delete “-0.580 V” and substitute “-0.630 V”, delete “-0.830 V” and substitute “-0.880 V”.

TABLE 1, V_{OH} row, Max limits column, delete “-0.720 ” and substitute “-0.780 ”, delete “-0.580 ” and substitute “-0.630 ”, delete “-0.830 ” and substitute “-0.880 ”.

TABLE 1, V_{OL} row, V_{IH1} column, delete “-0.720 V” and substitute “-0.780 V”, delete “-0.580 V” and substitute “-0.630 V”, delete “-0.830 V” and substitute “-0.880 V”.

TABLE 1, I_{IH1} row, Condition column, delete “V_{IH1} = -0.720 V @ 25°C, -0.580 V @ 125°C, -0.830 V @ -55°C” and substitute “V_{IH1} = -0.780 V @ 25°C, -0.630 V @ 125°C, -0.880 V @ -55°C” .

TABLE 1, I_{IH2} row, Condition column, delete “V_{IH1} = -0.720 V @ 25°C, -0.580 V @ 125°C, -0.830 V @ -55°C ” and substitute “V_{IH1} = -0.780 V @ 25°C, -0.630 V @ 125°C, -0.880 V @ -55°C” .

PAGE 4

TABLE 1, after the table and before the footnotes, add “ Notes apply to device types 01-05 only.”

PAGE 14

TABLE IIIA, T_C = 125°C row, V_{IH2} column, delete “+1.11” and substitute “+1.24”.
TABLE IIIA, T_C = 125°C row, V_{IL2} column, delete “+0.31” and substitute “+0.36”.
TABLE IIIA, T_C = -55°C row, V_{IH2} column, delete “+1.11” and substitute “+1.01”.
TABLE IIIA, T_C = -55°C row, V_{IL2} column, delete “+0.31” and substitute “+0.28”.

PAGE 16

TABLE III, I_{IH1} row, test limits subgroup 2 max column, delete “265” and substitute “450”.
TABLE III, I_{IH2} row, test limits subgroup 2 max column, delete “550” and substitute “935”.

PAGE 17

TABLE III, I_{IH1} row, test limits subgroup 2 max column, delete “265” and substitute “450”.

PAGE 20

TABLE III, I_{IH1} row, test limits subgroup 2 max column, delete “265” and substitute “450”.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:08Z
Check the source to verify that this is the current version before use.

PAGE 21

TABLE III, I_{IH1} row, test limits subgroup 2 max column, delete “265” and substitute “450”.

PAGE 24

TABLE III, I_{IH1} row, test limits subgroup 2 max column, delete “265” and substitute “450”.
TABLE III, I_{IH2} row, test limits subgroup 2 max column, delete “220” and substitute “375”.

PAGE 27

TABLE III, I_{IH1} row, test limits subgroup 2 max column, delete “265” and substitute “450”.

PAGE 30

FIGURE 4, delete the propagation delay timewaveforms, and substitute :

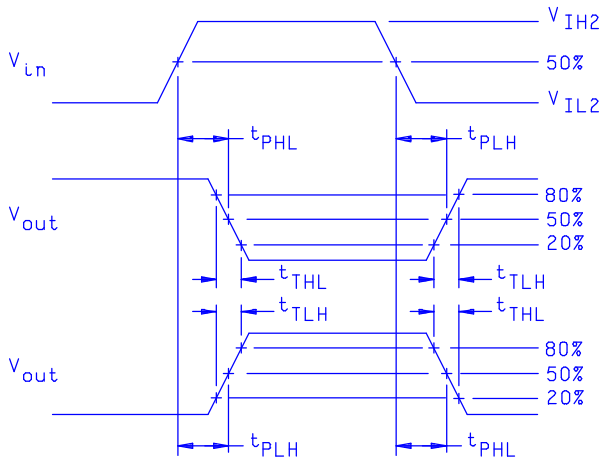

FIGURE 4, delete ‘t_p = 40 ns = 1 ns “ and substitute “t_p = 40 ns $\pm$ 1 ns “.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI, SM
Navy - AS, CG, MC, SH, OS, TD
Air Force - 11, 19, 85, 99

Preparing activity:
DLA - CC

(Project 5962-1789)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:08Z
Check the source to verify that this is the current version before use.