NOT MEASUREMENT SENSITIVE


MIL-D-3943/1C
12 June 1992
SUPERSEDING
MIL-D-3943/1B
31 March 1987

MILITARY SPECIFICATION SHEET


DECORATION, MEDAL OF HONOR, ARMY


This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-D-3943.

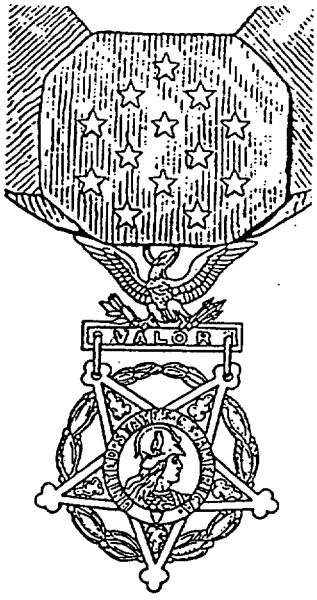

OBVERSE

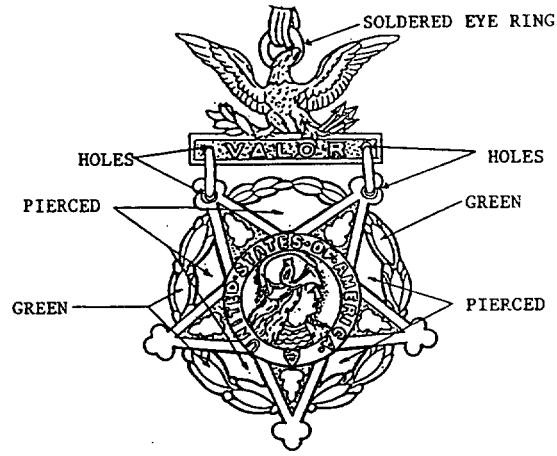

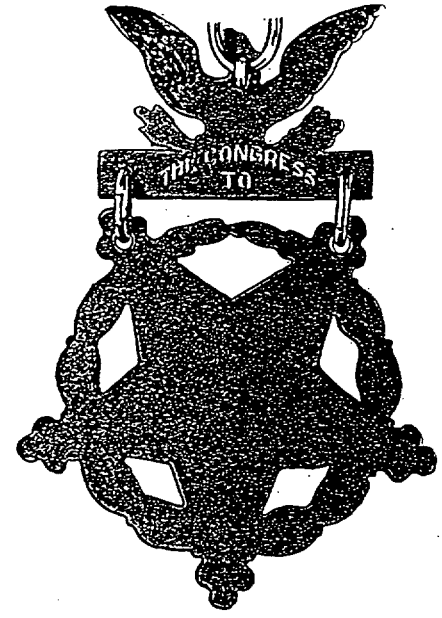

REVERSE

MATERIAL:

PENDANT AND SUSPENSION BAR: Gilding Metal
EYE, JUMP RINGS, AND SUSPENSION RING: Red Brass

FINISH:

PENDANT: Hard Enameled, Gold Plated, Rose Gold Plated, Matte Finish, Polished Highlights, Lacquered
SUSPENSION BAR AND RINGS: Gold Plated, Rose Gold Plated, Matte Finish, Polished Highlights, Lacquered

AMSC N/A **FSC 8455**

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:39Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

PENDANT:

HEIGHT (Overall): 1-7/16 inches (3.65 cm) (REF)
WIDTH (Overall): 1-1/2 inches (3.81 cm) (REF)
THICKNESS (At Thickness Point): 0.125 inch ± 0.005 inch (0.318 cm ± 0.012 cm)

SUSPENSION BAR:

HEIGHT (Overall): 3/4 inch (1.91 cm) (REF)
WIDTH (Overall): 31/32 inch (2.46 cm) (REF)
THICKNESS (At Thickness Point): 0.090 inch ± 0.005 inch (0.229 cm ± 0.012 cm)

NOTES:

1. Pierced areas shall be as indicated.

2. The enamel color shall be green and conform to TIOH Color Chip No. 11 or the standard sample.

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. The epoxy resin shall be a stoning epoxy, have a shore D hardness of no less than 85 and incorporate an ultraviolet inhibitor.

4. Jump rings shall be formed from 0.040 inch ± 0.002 inch (0.102 cm ± 0.005 cm) inch diameter wire. The rings shall be oval, 7/32 inch ± 1/32 inch (0.56 cm ± 0.08 cm) high and shall be gold soldered closed.

5. Suspension ring shall be formed from 0.040 inch ± 0.002 inch (0.102 cm 0.005 cm) diameter wire. The rings shall be oval, 3/8 inch + 1/16 inch - 0 inch (0.95 cm + 0.16 cm - 0 cm) high by 1/4 inch ± 1/32 inch (0.64 cm ± 0.08 cm) wide, and shall be gold soldered closed with the ends in line.

6. Holes shall be drilled in the suspension bar and the pendant in the location shown. The holes shall be 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm) in diameter.

7. The suspension bar shall be engraved with the words "THE CONGRESS TO" as shown. Letters shall be condensed Roman 1/16 inch (0.16 cm) high.

8. The eye ring shall be formed from 0.040 inch ± 0.002 inch (0.102 cm 0.005 cm) diameter wire and shall have an outside diameter of 5/32 inch + 1/32 inch - 0 inch (0.40 cm + 0.08 cm - 0 cm). The eye ring shall be gold soldered in the location shown.

9. The neck ribbon, shield and attaching device shall be fabricated as shown on Figures 2 and 3.

10. The completely assembled decorations shall be wrapped in three thickness of tissue paper and placed in a unit box for shipment. The dimensions of the box shall be determined by the contractor.

11. Type I decoration set shall consist of a neck ribbon with shield and pendant, a service ribbon and a rosette all packaged in a presentation case conforming to MIL-C-14633, Style 4, Type I, Class 1 or 1A pad.

Source: https://assist.dla.mil - Downloaded: 2026-10-16T22:39Z
Check the source to verify that this is the current version before use.

12. The ribbon for the neck ribbon, shield and service ribbon shall conform to MIL-R-11589/83.

13. The rosette shall conform to MIL-R-14649/1.

14. The term (REF) refers to the measurements taken from the Government furnished hub or die.

Custodians:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0669)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:39Z
Check the source to verify that this is the current version before use.