NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/1E
1 May 1997
SUPERSEDING
MIL-D-3943/1D
24 June 1994

DETAIL SPECIFICATION SHEET

DECORATION, MEDAL OF HONOR, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

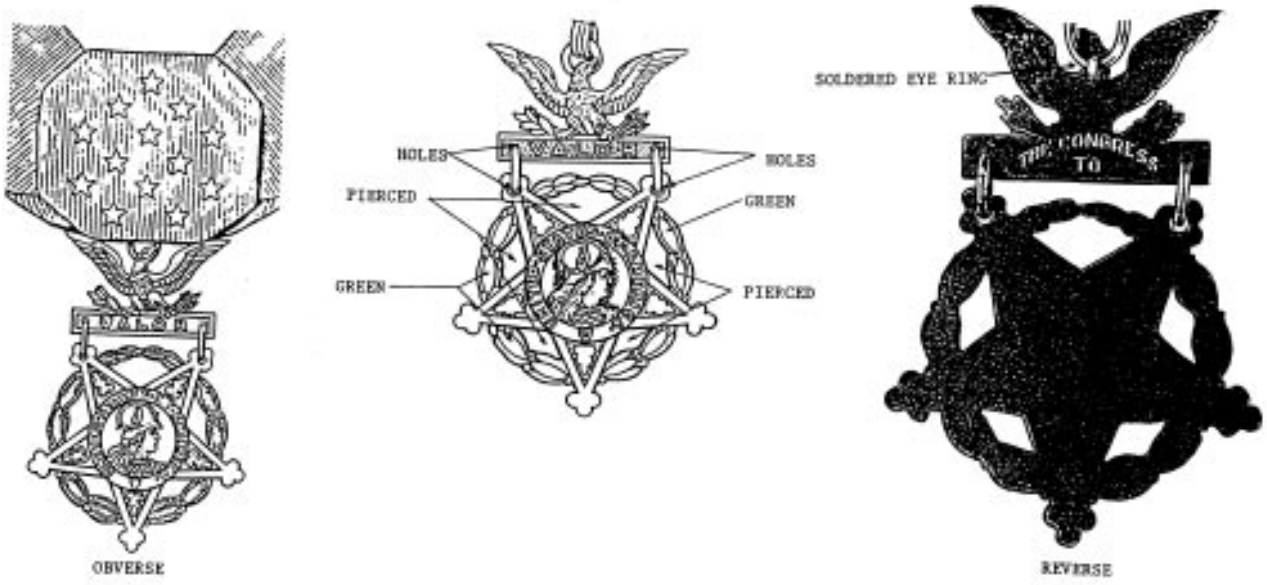

MATERIAL:
PENDANT AND SUSPENSION BAR: Gilding Metal
EYE, JUMP RINGS, AND SUSPENSION RING: Red Brass

FINISH:
PENDANT: Hard Enameled, Gold Plated, Rose Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 20.
SUSPENSION BAR AND RINGS: Gold Plated, Rose Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 20.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:38Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

PENDANT:

HEIGHT (Overall):	1-7/16 inches	(3.65 cm) (REF)
WIDTH (Overall):	1-1/2 inches	(3.81 cm) (REF)
THICKNESS (At Thickness Point):	0.125 inch ± 0.010 inch	(0.318 cm ± 0.025 cm)

SUSPENSION BAR:

HEIGHT (Overall):	3/4 inch	(1.91 cm) (REF)
WIDTH (Overall):	31/32 inch	(2.46 cm) (REF)
THICKNESS (At Thickness Point):	0.090 inch ± 0.010 inch	(0.229 cm ± 0.025 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. The enamel color shall be green as indicated. The enamel color shall conform to the TIOH Color Chip No. 11 or the standard sample.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

5. The green enamel areas of the weath shall be convex within the dikes.

6. Jump rings shall be formed from 0.040 inch ± 0.002 inch (0.102 cm ± 0.005 cm) inch diameter wire. The rings shall be oval, 7/32 inch ± 1/32 inch (0.56 cm ± 0.08 cm) high and shall be hard soldered closed with the ends in line.

7. Suspension rings shall be formed from 0.040 inch ± 0.002 inch (0.102 cm 0.005 cm) diameter wire. The rings shall be oval, 3/8 inch + 1/16 inch - 0 inch (0.95 cm + 0.16 cm - 0 cm) high by 1/4 inch ± 1/32 inch (0.64 cm ± 0.08 cm) wide, and shall be hard soldered closed with the ends in line.

8. Holes shall be drilled in the suspension bar and the pendant in the location shown. The holes shall be 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm) in diameter.

9. The suspension bar shall be engraved on the reverse side with the words "THE CONGRESS TO" as shown. Letters shall be condensed Roman 1/16 inch (0.16 cm) high.

10. The eye ring shall be formed from 0.040 inch ± 0.002 inch (0.102 cm 0.005 cm) diameter wire and shall have an outside diameter of 5/32 inch + 1/32 inch - 0 inch (0.40 cm + 0.08 cm - 0 cm). The eye ring shall be hard soldered to the reverse of the suspension bar in the location shown.

11. The neck ribbon, shield and attaching device shall be fabricated as shown on Figures 2 and 3.

12. Decoration set shall consist of a neck ribbon with shield and pendant, a service ribbon and a rosette all packaged in a presentation case conforming to MIL-DTL-14633, Style 4, Type I, Class 1 or 1A pad.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:38Z
Check the source to verify that this is the current version before use.

13. The ribbon for the neck ribbon, shield and service ribbon shall conform to MIL-DTL-11589/83.

14. The rosette shall conform to MIL-DTL-14649/1.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0887)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:38Z
Check the source to verify that this is the current version before use.