NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/1F
11 May 1999
SUPERSEDING
MIL-DTL-3943/1E
1 May 1997


DETAIL SPECIFICATION SHEET

DECORATION, MEDAL OF HONOR, ARMY


Inactive for new design after 13 January 1999.


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

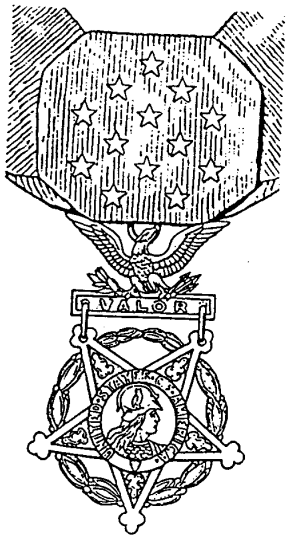

OBVERSE

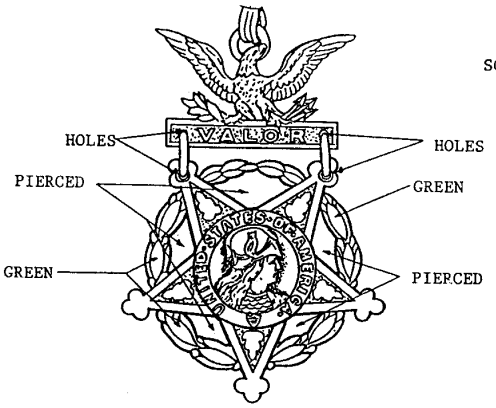

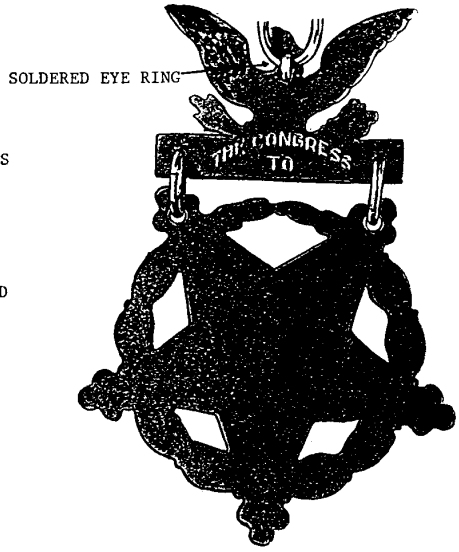

REVERSE

MATERIAL:

PENDANT AND SUSPENSION BAR: Gilding Metal
EYE, JUMP RINGS, AND SUSPENSION RING: Red Brass

FINISH:

PENDANT: Hard Enameled, Gold Plated, Rose Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 20.
SUSPENSION BAR AND RINGS: Gold Plated, Rose Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 20.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:38Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

PENDANT:
HEIGHT (overall): 1-7/16 inches (REF)
WIDTH (overall): 1-1/2 inches (REF)
THICKNESS (at thickest point): 0.125 inch ± 0.010 inch

SUSPENSION BAR:
HEIGHT (overall): 3/4 inch ((REF)
WIDTH (overall): 31/32 inch (REF)
THICKNESS (at thickest point): 0.090 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. The enamel color shall be green as indicated. The enamel color shall conform to TIOH Hard Enamel Color Chip No. 11.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.

5. The green enamel areas of the wreath shall be convex within the dikes.

6. Jump rings shall be formed from 0.040 inch ± 0.002 inch diameter wire. The rings shall be oval, 7/32 inch ±1/32 inch high and shall be hard soldered closed with the ends in line.

7. Suspension rings shall be formed from 0.040 inch ± 0.002 inch diameter wire. The rings shall be oval, 3/8 inch + 1/16 inch - 0 inch high by 1/4 inch ± 1/32 inch wide, and shall be hard soldered closed with the ends in line.

8. Holes shall be drilled in the suspension bar and the pendant in the location shown. The holes shall be 0.065 inch ± 0.005 inch in diameter.

9. The suspension bar shall be engraved on the reverse side with the words "THE CONGRESS TO" as shown. Letters shall be condensed Roman 1/16 inch high.

10. The eye ring shall be formed from 0.040 inch ± 0.002 inch diameter wire and shall have an outside diameter of 5/32 inch + 1/32 inch - 0 inch. The eye ring shall be hard soldered to the reverse of the suspension bar in the location shown.

11. The neck ribbon, shield and attaching device shall be fabricated as shown on Figures 6 and 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:38Z
Check the source to verify that this is the current version before use.

12. Decoration set shall consist of a neck ribbon with shield and pendant, a service ribbon, and a rosette all packaged in a presentation case conforming to MIL-DTL-14633, Style 4, Type I, Class 1 or 1A pad.

13. The ribbon for the neck ribbon, shield, and service ribbon shall conform to MIL-DTL-11589/83.

14. The rosette shall conform to MIL-DTL-14649/1.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0978)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:38Z
Check the source to verify that this is the current version before use.