INCH-POUND


MIL-DTL-3943/1G
29 May 2007
SUPERSEDING
MIL-DTL-3943/1F
11 May 1999

DETAIL SPECIFICATION SHEET


DECORATION, MEDAL OF HONOR, ARMY


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

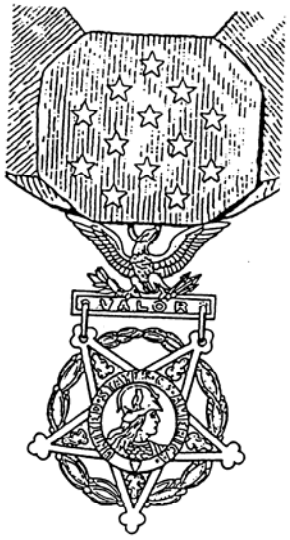

OBVERSE

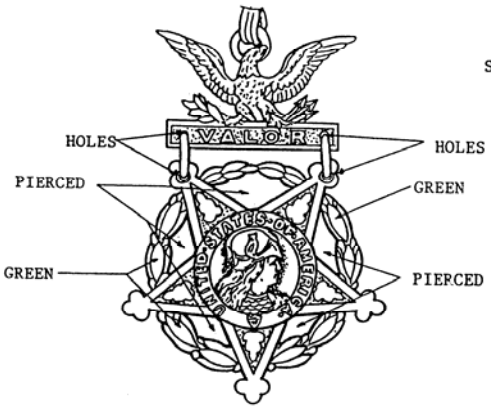

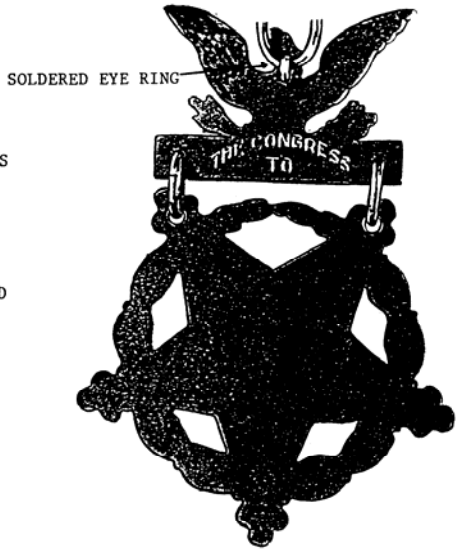

REVERSE

MATERIAL:

PENDANT AND SUSPENSION BAR: Gilding Metal
EYE, JUMP RINGS, AND SUSPENSION RING: Red Brass

FINISH:

PENDANT: Hard Enameled, Gold Plated, Rose Gold Plated, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 20.
SUSPENSION BAR AND RINGS: Gold Plated, Rose Gold Plated, Polished Highlights and shall match TIOH Metal Finish Chip Number 20.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:38Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

PENDANT:
HEIGHT (overall): 1-7/16 inches (REF)
WIDTH (overall): 1-1/2 inches (REF)
THICKNESS (at thickest point): 0.125 inch ± 0.010 inch
SUSPENSION BAR:
HEIGHT (overall): 3/4 inch ((REF)
WIDTH (overall): 31/32 inch (REF)
THICKNESS (at thickest point): 0.090 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. The enamel color shall be green as indicated. The enamel color shall conform to TIOH Hard Enamel Color Chip No. 11.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.

5. The green enamel areas of the wreath shall be convex within the dikes.

6. Jump rings shall be formed from 0.040 inch ± 0.002 inch diameter wire. The rings shall be oval, 7/32 inch ±1/32 inch high and shall be hard soldered closed with the ends in line.

7. Suspension rings shall be formed from 0.040 inch ± 0.002 inch diameter wire. The rings shall be oval, 3/8 inch + 1/16 inch - 0 inch high by 1/4 inch ± 1/32 inch wide, and shall be hard soldered closed with the ends in line.

8. Holes shall be drilled in the suspension bar and the pendant in the location shown. The holes shall be 0.065 inch ± 0.005 inch in diameter.

9. The suspension bar shall be engraved on the reverse side with the words "THE CONGRESS TO" as shown. Letters shall be condensed Roman 1/16 inch high.

10. The eye ring shall be formed from 0.040 inch ± 0.002 inch diameter wire and shall have an outside diameter of 5/32 inch + 1/32 inch - 0 inch. The eye ring shall be hard soldered to the reverse of the suspension bar in the location shown.

11. The neck ribbon, shield and attaching device shall be fabricated as shown on Figures 6 and 7.

12. Decoration set shall consist of a neck ribbon with shield and pendant, a service ribbon, and a rosette all packaged in a presentation case conforming to MIL-DTL-14633, Style 4, Type I, Class 1 or 1A pad.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:38Z
Check the source to verify that this is the current version before use.

13. The ribbon for the neck ribbon, shield, and service ribbon shall conform to MIL-DTL-11589/83.

14. The rosette shall conform to MIL-DTL-14649/1.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH
(Project No. 8455-2007-033)

Review activities:
DLA – CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:38Z
Check the source to verify that this is the current version before use.