NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/1L(IH)
3 June 2026
SUPERSEDING
MIL-DTL-3943/1K(IH)
10 July 2025

DETAIL SPECIFICATION SHEET

DECORATION, MEDAL OF HONOR, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

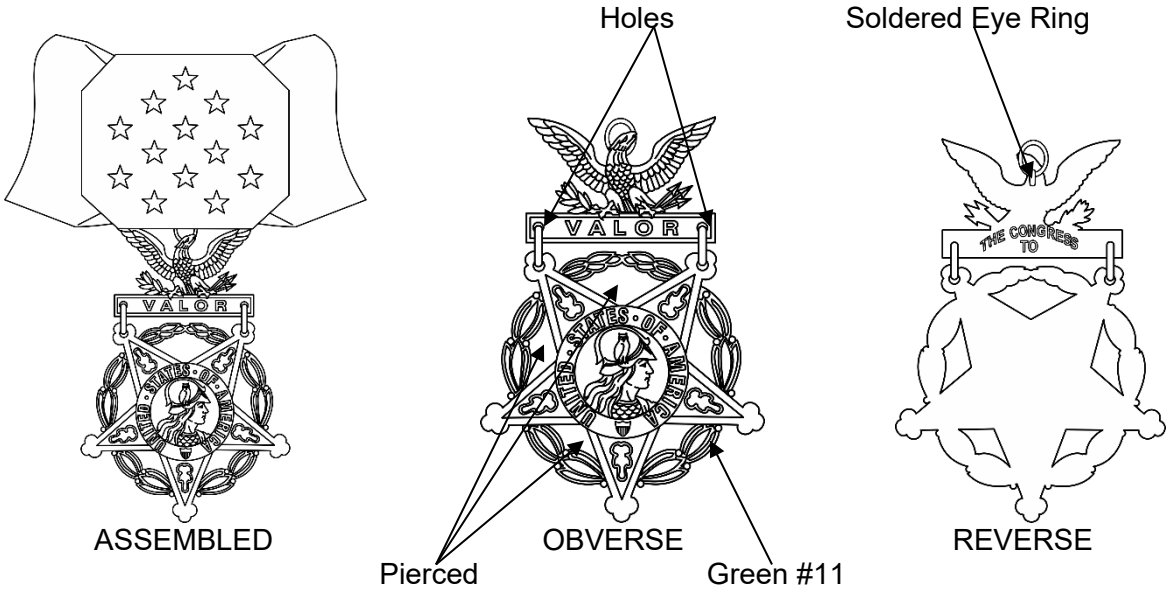

MATERIAL:
PENDANT AND SUSPENSION BAR: Gilding Metal 95/5 (UNS Alloy No. C-210)
EYE, JUMP RINGS, AND SUSPENSION RING: Red Brass 85/15 (UNS Alloy C-230)

FINISH:
PENDANT: Epoxy resin, 24K Gold Plated, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
SUSPENSION BAR AND RINGS: 24K Gold Plated, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:38Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
PENDANT:
HEIGHT (Overall): 1-7/16 inches (REF)
WIDTH (Overall): 1-1/2 inches (REF)
THICKNESS (At thickest point): 0.125 inch ± 0.010 inch
SUSPENSION BAR:
HEIGHT (Overall): 3/4 inch (REF)
WIDTH (Overall): 31/32 inch (REF)
THICKNESS (At thickest point): 0.090 inch ± 0.005 inch

DECORATION SET: Decoration set shall consist of a neck ribbon with shield and pendant, service ribbon, and rosette all packaged in a presentation case conforming to MIL-DTL-14633, Type IV, Class 1 pad.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. The green epoxy areas of the wreath shall be convex within the dikes.

4. Jump rings shall be formed from 0.040 inch ± 0.002 inch diameter wire. The rings shall be oval, 7/32 inch ±1/32 inch high and shall be hard soldered closed with the ends in line.

5. Suspension rings shall be formed from 0.040 inch ± 0.002 inch diameter wire. The rings shall be oval, 3/8 inch + 1/16 inch - 0 inch high by 1/4 inch ± 1/32 inch wide and shall be hard soldered closed with the ends in line.

6. Holes shall be drilled in the suspension bar and the pendant in the location shown. The holes shall be 0.065 inch ± 0.005 inch in diameter.

7. The suspension bar shall be engraved on the reverse side with the words "THE CONGRESS TO" as shown. Letters shall be condensed Roman 1/16 inch high.

8. The eye ring shall be formed from 0.040 inch ± 0.002 inch diameter wire and shall have an outside diameter of 5/32 inch + 1/32 inch - 0 inch. The eye ring shall be hard soldered to the reverse of the suspension bar in the location shown.

9. The neck ribbon, shield and attaching device shall be fabricated as shown on Figures 6 and 7.

10. The specification slash sheet for the ribbon for the neck ribbon, shield and for the service ribbon is MIL-DTL-11589/83.

11. The specification slash sheet for the rosette is MIL-R-14649/1.

12. This item is not authorized for commercial sale and may be produced only under Government contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:38Z
Check the source to verify that this is the current version before use.

EPOXY: Epoxy resin shall be applied to the decoration as indicated above and shall match TIOH Hard Epoxy Color Chip Number listed below.

TIOH EPOXY COLOR CHIP	
COLOR	**CHIP NUMBER**
Green	#11

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-353)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:38Z
Check the source to verify that this is the current version before use.