NOT MEASUREMENT SENSITIVE


MIL-D-3943/2C
7 August 1991
SUPERSEDING
MIL-D-3943/2B
31 March 1987

MILITARY SPECIFICATION SHEET

DECORATION, MEDAL OF HONOR, NAVY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-D-3943.

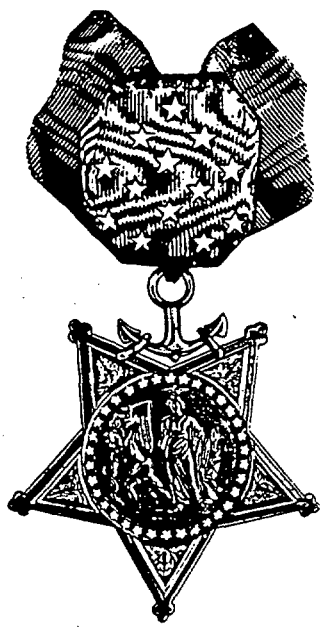

MATERIAL: Red Brass
DIMENSIONS:
PENDANT:
HEIGHT (OVERALL): 2 inches (5.08 cm) (REF)
WIDTH (OVERALL): 2-1/16 inches (5.24 cm) (REF)
THICKNESS (AT THICKEST POINT): .150 inch ± .005 inch (0.381 cm ± 0.012 cm)
SUSPENSION (ANCHOR) BAR:
HEIGHT (OVERALL): 23/32 inch (1.83 cm) (REF)
WIDTH (OVERALL): 23/32 inch (1.83 cm) (REF)
THICKNESS (At thickest point): .115 inch ± .005 inch (0.292 cm ± 0.012 cm)

FINISH: Oxidized, relieved, matte finish

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:39Z
Check the source to verify that this is the current version before use.

NOTES:

1. Jump rings shall be formed from .040 inch ± .002 inch (0.101 cm ± 0.005 cm) diameter wire. The rings shall be oval, 3/16 inch ± 1/64 inch (0.48 cm ± 0.04 cm) by 5/16 inch ± 1/64 inch, (0.79 cm ± 0.04 cm) and shall be soldered closed with the ends in line.

2. Two holes, .065 inch ± .005 inch (0.165 cm ± 0.012 cm) in diameter, shall be drilled through the pendant. The holes shall be located 1/4 inch (0.64 cm) in from and 1/4 (0.64 cm) below the tip of the star points.

3. The neck ribbon, shield and attaching device shall be fabricated as shown on figures 2 and 3.

4. The completely assembled decorations shall be wrapped in three thicknesses of tissue paper and placed in a unit box for shipment. The dimensions of the unit box shall be determined by the contractor.

5. Jump ring closure shall be located on the reverse side of the pendant.

6. Type I decoration set shall consist of a neck ribbon with shield and pendant, a service ribbon and a rosette all packaged in a presentation case conforming to MIL-C-14633, Style 4, Type I with a Type I, Class 1 or 1A Pad.

7. The ribbon for the neck ribbon, shield and service ribbon shall conform to MIL-R-11589/83.

8. The rosette shall conform to MIL-R-14649/1.

9. The use of any type of plastic packaging material is prohibited.

Custodians:
Army - IH
Navy - NU

Review activities:
Navy - MC
DLA - CT

User activity:
Navy - CG

Preparing activity:
Army - IH

(Project No. 8455-N611)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:39Z
Check the source to verify that this is the current version before use.