INCH-POUND

MIL-DTL-3943/2G
30 May 2006
SUPERSEDING
MIL-DTL-3943/2F
16 September 1998

DETAIL SPECIFICATION SHEET

DECORATION, MEDAL OF HONOR, NAVY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943.

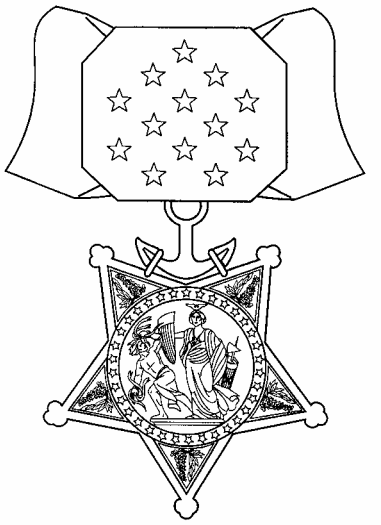

MATERIAL: Red Brass

FINISH: Oxidized, Buffed Relieved, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 4.

DIMENSIONS:

PENDANT:
HEIGHT (Overall): 2 inches (5.08 cm) (REF)
WIDTH (Overall): 2-1/16 inches (5.24 cm) (REF)
THICKNESS (At Thickest Point): 0.150 inch $\pm$ 0.010 inch (0.381 cm $\pm$ 0.025 cm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:39Z
Check the source to verify that this is the current version before use.

SUSPENSION (ANCHOR) BAR:
HEIGHT (Overall): 23/32 inch (1.83 cm) (REF)
WIDTH (Overall): 23/32 inch (1.83 cm) (REF)
THICKNESS (At Thickest Point): 0.115 inch ± 0.010 inch (0.292 cm ± 0.025 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Two holes, 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm) in diameter, shall be drilled through the pendant. The holes shall be located 1/4 inch (0.64 cm) in from and 1/4 inch (0.64 cm) below the tip of the star points.

3. Jump rings shall be fabricated from 0.040 inch ± 0.002 inch (0.101 cm ± 0.005 cm) nominal diameter wire with the same material and finish as the pendant. The rings shall be oval, 3/16 inch ± 1/64 inch (0.48 cm ± 0.04 cm) by 5/16 inch ± 1/64 inch (0.79 cm ± 0.04 cm).

4. The jump rings shall be soldered to the back of the anchor adjacent to the anchor hooks.

5. Jump ring closure shall be located on the reverse side of the pendant and shall be hard soldered closed with the ends in line.

6. The neck ribbon, shield and attaching device shall be fabricated as shown on Figures 2 and 3 of the basic specification.

7. Decoration set shall consist of a neck ribbon with shield and pendant, a service ribbon and a rosette all packaged in a presentation case conforming to MIL-DTL-14633, Type I, Style 4 with a Type I, Class 1 or 1A pad.

8. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/83.

9. The rosette shall conform to MIL-DTL-14649/1.

10. The use of any type of plastic packaging material is prohibited.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy – MC
DLA - CT

(Project No. 8455-2006-044)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:39Z
Check the source to verify that this is the current version before use.

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:39Z
Check the source to verify that this is the current version before use.