NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/2M
3 Jun3 2026
SUPERSEDING
MIL-DTL-3943/2L
10 July 2025

DETAIL SPECIFICATION SHEET

DECORATION, MEDAL OF HONOR, U.S. NAVY

This specification is approved for use by all
Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

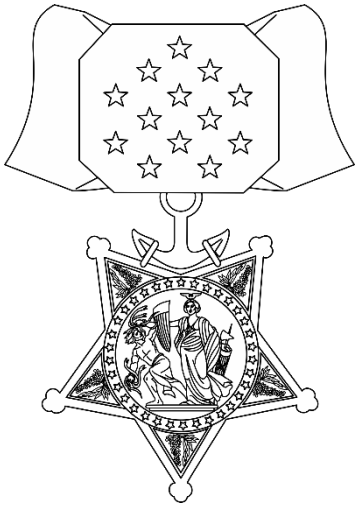

ASSEMBLED



OBVERSE

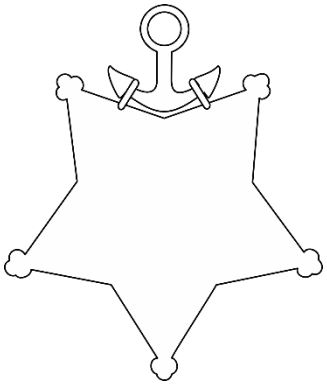

REVERSE

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Oxidized, Buffed Relieved and shall match The Institute of Heraldry Metal Finish Chip Number 4.

DIMENSIONS:
PENDANT:
HEIGHT (Overall): 2 inches (REF)
WIDTH (Overall): 2-1/16 inches (REF)
THICKNESS (At thickest point): 0.150 inch ± 0.010 inch
SUSPENSION (ANCHOR) BAR:
HEIGHT (Overall): 23/32 inch (REF)
WIDTH (Overall): 23/32 inch (REF)
THICKNESS (At thickest point): 0.115 inch ± 0.010 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:39Z
Check the source to verify that this is the current version before use.

DECORATION SET: Decoration set shall consist of a neck ribbon with shield and pendant, service ribbon and rosette all packaged in a presentation case conforming to MIL-DTL-14633, Type IV, Class 1 pad.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Two holes, 0.065 inch ± 0.005 inch in diameter, shall be drilled through the pendant. The holes shall be located 1/4 inch in from and 1/4 inch below the tip of the star points.

3. Jump rings shall be fabricated from 0.040 inch ± 0.002 inch nominal diameter wire with the same material and finish as the pendant. The rings shall be oval, 3/16 inch ± 1/64 inch by 5/16 inch ± 1/64 inch

4. The jump rings shall be soldered to the back of the anchor adjacent to the anchor hooks.

5. Jump ring closure shall be located on the reverse side of the pendant and shall be hard soldered closed with the ends in line.

6. The neck ribbon, shield and attaching device shall be fabricated as shown in Figures 2 and 3 of the basic specification.

7. The specification slash sheet for the ribbon for the pendant drape and service ribbon for the is MIL-DTL-11589/83

8. The specification slash sheet for the rosette is MIL-R-14649/1.

9. The use of any type of plastic packaging material is prohibited.

10. This item is not authorized for commercial sale and may be produced only under Government contract.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:39Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC
DLA - CT

(Project No. 8455-2026-354)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:39Z
Check the source to verify that this is the current version before use.