NOT MEASUREMENT SENSITIVE


MIL-D-3943/3C
12 June 1992
SUPERSEDING
MIL-D-3943/3B
31 March 1987

MILITARY SPECIFICATION SHEET


DECORATION, MEDAL OF HONOR, AIR FORCE


This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-D-3943.

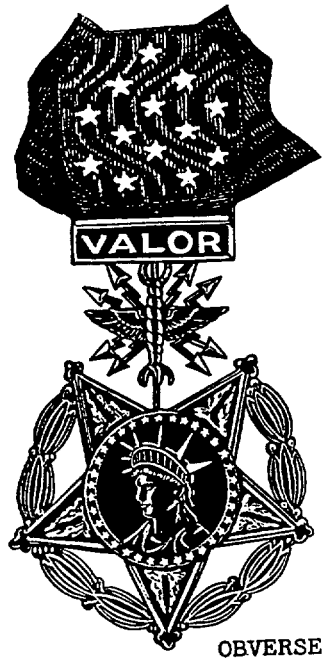

OBVERSE

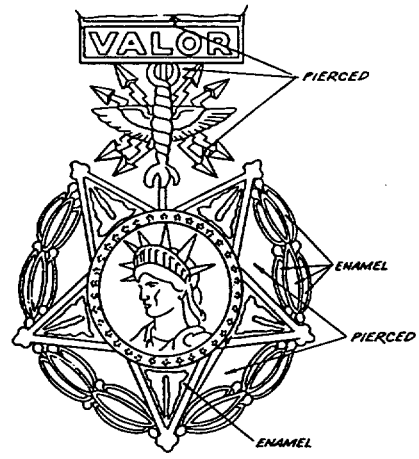

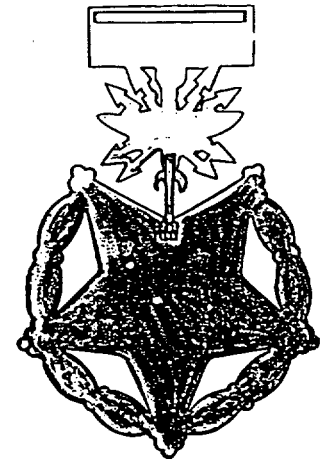

REVERSE

MATERIAL:

PENDANT, SUSPENSION BAR: Gilding Metal
CONNECTING BAR, HINGE AND PIN: Bronze

FINISH:

PENDANT: Hard Enameled, Gold Plated, Rose Gold Plated, Relieved, Matte Finish, Lacquered
SUSPENSION BAR, CONNECTING BAR, HINGE AND PIN: Gold Plated, Rose Gold Plated, Relieved, Matte Finish, Lacquered

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:40Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

PENDANT:

HEIGHT (Overall): 2 inch (5.08 cm) (REF)
WIDTH (Overall): 2-1/16 inches (5.24 cm (REF)
THICKNESS (At thickest point): 0.170 inch ± 0.005 inch (0.432 cm ± 0.012 cm)

SUSPENSION BAR:

HEIGHT (Overall): 1-1/4 inch (3.18 cm) (REF)
WIDTH (Overall): 1-1/8 inch (2.86 cm) (REF)
THICKNESS (At thickest point): 0.115 inch ± 0.005 inch (0.292 cm ± 0.012 cm)

NOTES:

1. Piercing shall be as indicated.

2. The enameled color shall be Transparent Green and conform to the TIOH chip number 11 or the standard sample.

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. The epoxy resin shall be a stoning epoxy, have a shore D hardness of no less than 85 and incorporate an ultraviolet inhibitor.

4. The pendant shall be attached to the suspension device by means of a connecting bar and pinned hinge. The connecting bar shall be 0.055 inch ± 0.005 inch (0.140 cm ± 0.012 cm) square and shall be soldered to the suspension bar so as to insure a distance 5/64 inch ± 1/64 inch (0.20 cm ± 0.04 cm) between the tip of the lightning bolts and the edge of the star point.

5. The hinge shall be 1/8 inch (0.32 cm) by 1/8 inch (0.32 cm) deep by 3/16 inch (0.48 cm) high and shall be soldered to the vertical center line of the pendant 3/32 inch + 1/32 inch - 0 (0.24 cm + 0.08 cm - 0) below the lowest point of the "V".

6. The neck ribbon, shield, and attaching device shall be as shown on Figures 2 and 3.

7. Unless otherwise specified, the completely assembled decoration shall be wrapped in three thicknesses of tissue paper and placed in a unit box for shipment. The dimensions of the unit box shall be determined by the contractor.

8. Type I Decoration set shall consist of a neck ribbon with shield and pendant, a service ribbon and a rosette all packaged in a presentation case conforming to MIL-C-14633, Style 4, Type I with a Type 1, Class 1 or 1A pad.

9. The ribbon for the neck ribbon, shield, and service ribbon shall conform to MIL-R-11589/83.

10. The rosette shall conform to MIL-R-14649/1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:40Z
Check the source to verify that this is the current version before use.

11. The term (REF) refers to the measurements taken from the Government furnished hub or die.

Custodians:
Army - IH
Air Force - 11

Review activities:
Air Force - 82,99
DLA - CT

User activity:
Air Force - 45

Preparing activity:
Army - IH

(Project No. 8455-0669)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:40Z
Check the source to verify that this is the current version before use.