INCH-POUND

MIL-DTL-3943/3G
29 May 2007
SUPERSEDING
MIL-DTL-3943/3F
11 May 1999

DETAIL SPECIFICATION SHEET


DECORATION, MEDAL OF HONOR, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.



OBVERSE

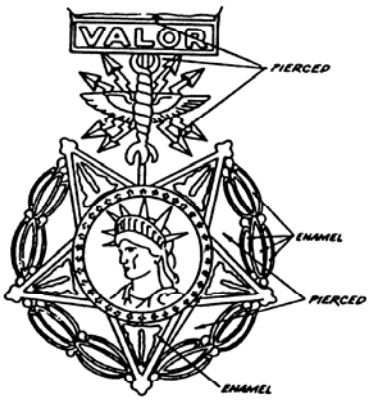


REVERSE

MATERIAL:

PENDANT, SUSPENSION BAR: Gilding Metal
CONNECTING BAR, HINGE, AND PIN: Bronze

FINISH:

PENDANT: Hard Enameled, Gold Plated, Rose Gold Plated, Buffed Relieved.
SUSPENSION BAR, CONNECTING BAR, HINGE, AND PIN: Gold Plated, Rose Gold Plated, Buffed Relieved.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:40Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

PENDANT:

HEIGHT (overall): 2 inches (REF)
WIDTH (overall): 2-1/16 inches (REF)
THICKNESS (at thickest point): 0.170 inch ± 0.010 inch

SUSPENSION BAR:

HEIGHT (overall): 1-1/4 inches (REF)
WIDTH (overall): 1-1/8 inches (REF)
THICKNESS (at thickest point): 0.115 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

3. The enameled color shall be Transparent Green as indicated. The enamel color shall conform to The Institute of Heraldry (TIOH) Hard Enamel Color Chip Number 11.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.

5. The green enamel areas of the wreath shall be convex within the dikes.

6. The pendant shall be attached to the suspension device by means of a connecting bar and pinned hinge. The connecting bar shall be 0.055 inch ± 0.005 inch square and shall be soldered to the suspension bar so as to insure a distance 5/64 inch ± 1/64 inch between the tip of the lightning bolts and the edge of the star point.

7. The hinge shall be 1/8 inch by 1/8 inch deep by 3/16 inch and shall be soldered to the vertical center line of the pendant 3/32 inch + 1/32 inch - 0 below the lowest point of the "V".

8. The neck ribbon, shield, and attaching device shall be as shown on Figures 6 and 7.

9. Decoration set shall consist of a neck ribbon with shield and pendant, a service ribbon, and a rosette all packaged in a presentation case conforming to MIL-DTL-14633, Type I, Style 4 with a Type 1, Class 1 or 1A pad.

10. The ribbon for the neck ribbon, shield, and service ribbon shall conform to MIL-DTL-11589/83.

11. The rosette shall conform to MIL-DTL-14649/1.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:40Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force – 11

Preparing activity:
Army - IH
(Project No. 8455-2007-056)

Review activities:
Air Force - 99
DLA - CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:40Z
Check the source to verify that this is the current version before use.