NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/3K
10 July 2025
SUPERSEDING
MIL-DTL-3943/3J
29 April 2021

DETAIL SPECIFICATION SHEET

DECORATION, MEDAL OF HONOR, U.S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

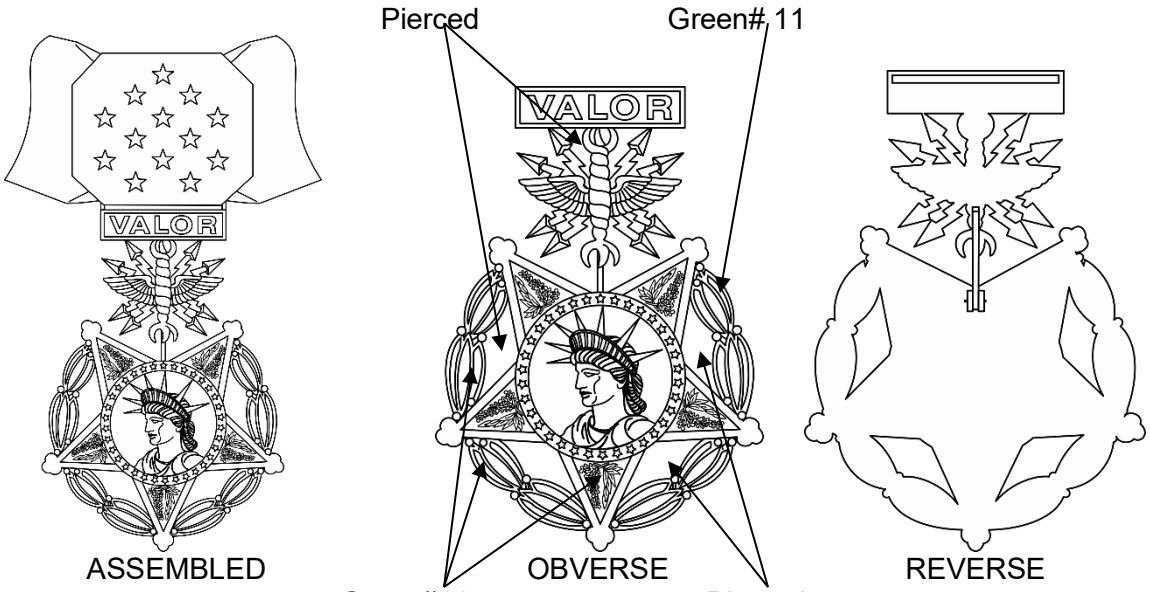

MATERIAL:
PENDANT, SUSPENSION BAR: Gilding Metal 95/5 (UNS Alloy No. C-210)
CONNECTING BAR, HINGE, AND PIN: Bronze

FINISH:
PENDANT: Epoxy resin, 24K Gold Plated, Buffed Relieved.
SUSPENSION BAR, CONNECTING BAR, HINGE, AND PIN: 24K Gold Plated, Buffed Relieved.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:39Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
PENDANT:
HEIGHT (Overall): 2 inches (REF)
WIDTH (Overall): 2-1/16 inches (REF)
THICKNESS (At thickest point): 0.170 inch ± 0.010 inch
SUSPENSION BAR:
HEIGHT (Overall): 1-1/4 inches (REF)
WIDTH (Overall): 1-1/8 inches (REF)
THICKNESS (At thickest point): 0.115 inch ± 0.010 inch

DECORATION SET: Decoration set shall consist of a neck ribbon with shield and pendant, service ribbon, and rosette all packaged in a presentation case conforming to MIL-DTL-14633, Type IV, Class 1 pad.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.

4. The green enamel areas of the wreath shall be convex within the dikes.

5. The pendant shall be attached to the suspension device by means of a connecting bar and pinned hinge. The connecting bar shall be 0.055 inch ± 0.005 inch square and shall be soldered to the suspension bar to insure a distance 5/64 inch ± 1/64 inch between the tip of the lightning bolts and the edge of the star point.

6. The hinge shall be 1/8 inch by 1/8 inch deep by 3/16 inch and shall be soldered to the vertical center line of the pendant 3/32 inch + 1/32 inch - 0 below the lowest point of the "V".

7. The neck ribbon, shield, and attaching device shall be as shown on Figures 6 and 7.

8. The specification slash sheet for the ribbon for the neck ribbon, shield and for the service ribbon is MIL-DTL-11589/83

9. The specification slash sheet for the rosette is MIL-R-14649/1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:39Z
Check the source to verify that this is the current version before use.

EPOXY: Epoxy resin shall be applied to the decoration as indicated above and shall match TIOH Hard Enamel Color Chip Number listed below.

TIOH HARD ENAMEL COLOR CHIP	
COLOR	**CHIP NUMBER**
Green	#11

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2025-198)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Specification has been updated to reflect nomenclature changes for case Type and pad Class as noted in “Decoration Set” paragraph

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:39Z
Check the source to verify that this is the current version before use.