INCH-POUND

A-A-50474B
June 21, 1993
SUPERSEDING
A-A-50474A
April 11, 1989

COMMERCIAL ITEM DESCRIPTION

OILERS, HAND, TYPEWRITER

The General Services Administration has authorized the use of this commercial item description in preference to Federal specification GGG-O-591, type V, style 1, 2, and 3.

Abstract. This CID covers the requirements for typewriter hand oilers. The oiler shall be of cold-rolled steel. The oiler shall consist essentially of a body, a washer, a threaded removable spout, and a spout cover or spout cap. Shape of the oiler shall be style 1, oval; style 2, cylindrical; or style 3, hemispherical, as specified in the contract or order.

Salient characteristics.

1. Style 1, oval shape oiler. Style 1 oiler shall be similar to figure 1, and shall comply with the requirements of table I. The oiler shall discharge one drop of typewriter oil through the tip end of the spout by tilting, or pressing the sides of the oiler with the fingers. It shall discharge several drops of oil through the tip of the spout by tilting the oiler and gently pressing the sides of the body with the fingers.

TABLE I. Style 1 oiler dimensions.

Capacity minimum fluid ounce	Width (A) minimum inches	Height (B) minimum inches	Thickness (C) minimum inches
1/2 ±1/16	1	3-3/16	9/16

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, 621 Pleasant Valley Road, Port Hueneme, CA 93043-4300.

FSC 4930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

2. Style 1 oiler body. Portions of two of the vertical sides of the body shall be convex in a manner to eject oil from the oiler when pushed and to return to normal position when pressure is released. Failure to return to normal position will be considered as failure to meet these requirements. The opening in the top of the body shall be not less then 3/8 inch in diameter and shall be provided with a collar that is threaded to receive the threaded portion of the spout and spout cover. All seams shall be leakproof.

3. Style 1 oiler spout. The orifice at the outer end of the spout shall be not less than 1/16 inch in diameter. The spout shall be not less than 1 inch long. The large end of the spout shall be threaded for insertion in the threaded portion of the oiler body. The spout shall be straight.

4. Style 1 spout cover. The style 1 spout shall be provided with a cap or cover which shall prevent leakage when in place. The spout cover shall be made of high density polyethylene (HDPE) or metal, as specified in the contract or order. Attached to the inside of the cover shall be a pointed, spout cleaning wire so arranged that when the cover is screwed in place, the cleaning wire shall extend inside the spout; or a neoprene plug shall be inserted in the inside of the extreme top of the cover, so located that when the cover is screwed into place the spout will press into the neoprene plug ensuring a tight fit and prevent leaking. The open end of the cover shall be threaded for insertion in the threaded portion of the body. The spout cover shall have a knurled ring around it to provide a good gripping surface when inserting or removing the cover from the body of the oiler.

5. Style 2, cylindrical shape oiler. Style 2 oiler shall be similar to figure 2, and shall comply with the requirements of table II. The oiler shall discharge either one drop or several drops of oil through the tip of the spout by gently pressing the bottom of the oiler.

TABLE II. Style 2 oiler dimensions.

Size, nominal	Width (A) minimum inches	Height (B) minimum inches	Capacity minimum fluid ounce
1/32 pint	7/8	4-1/2	1/2 +1/16 -0

6. Style 2 oiler body. The style 2 oiler body shall be cylindrical in shape and, at the option of the supplier may be either straight or stepped as shown in figure 2. The opening in the top shall be not less than 1/4 inch in diameter. The top of the body shall be threaded for assembly of the spout. The bottom shall be of the push-bottom type. The bottom, when pressed, shall return to normal position when pressure is released. Failure of the bottom to return to normal position will be cause for rejection. Seams shall be leakproof.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

7. Style 2 oiler spout. The style 2 oiler spout shall be not less than 1-3/4 inches in length. The spout shall be straight. The orifice at the outer end of the spout shall be not less than 0.025 inch in diameter. The large end of the spout shall be threaded for assembly on the body; the tip or small end of the spout shall be threaded for assembly of the spout cap.

8. Style 2 spout cap. The tip or small end of the spout shall be provided with a spout cap. The fitting of the cap and spout shall afford a strong and leakproof joint. The spout cap shall be made of HDPE or metal, as specified in the contract or order.

9. Style 3, hemispherical shape oiler. Style 3 oiler shall be similar to figure 3, and shall comply with the requirements of table III. The oiler shall discharge either one drop or several drops of oil through the tip of the spout by gently pressing the bottom of the oiler.

TABLE III. Style 3 oiler dimensions.

Size, nominal	Width (A) minimum inches	Height (B) minimum inches	Capacity minimum fluid ounce
1/32 pint	1-3/4	2-3/4	1/2 +1/4 -0

10. Style 3 oiler body. The style 3 oiler body shall be approximately hemispherical in shape as shown in figure 3. The opening in the top shall be not less than 1/2 inch in diameter. The top of the body shall be threaded for assembly of the spout. The bottom shall be of the push-bottom type. The bottom, when pressed, shall return to normal position when pressure is released. Failure of the bottom to return to normal position will be cause for rejection. Seams shall be leakproof.

11. Style 3 oiler spout. The style 3 oiler spout shall be not less than 1-1/4 inches in length. The spout shall be straight. The orifice at the outer end of the spout shall be not less than 0.025 inch in diameter. The large end of the spout shall be threaded for assembly on the body; the tip or small end of the spout shall be threaded for assembly of the spout cap.

12. Style 3 spout cap. The tip or small end of the spout shall be provided with a spout cap. The fitting of the cap and spout shall afford a strong and leakproof joint. The spout cap shall be made of HDPE or metal, as specified in the contract or order.

13. Finish. The oilers shall be polished, brass or copper coated or plated, with a coat of clear lacquer or varnish, or lacquered with an opaque lacquer, or baked-on enamel finish.

14. Washer. The washer shall be impervious to oil and shall have such oil-sealing qualities so as to prevent leakage at the threaded connection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

15. Marking. Each oiler shall be marked in a plain and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

Quality assurance provisions.

1. Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government.

2. Classification of inspection. The inspection requirements specified herein are classified as first article inspection and quality conformance inspection.

3. First article inspection. The first article inspection shall be performed on one oiler when a first article sample is specified in the contract or order. This inspection shall include examination and operational test as specified herein.

4. Quality conformance inspection. The quality conformance inspection shall be performed on the sample oiler selected in accordance with the inspection lot and sampling requirements. This inspection shall include examination and operational test as specified herein.

5. Inspection lot. All units of the same style offered to the Government at one time shall be considered a lot for purposes of inspection. The sample unit shall be one complete oiler.

6. Examination. Each sample selected in accordance with the inspection lot and sampling requirements and also the first article shall be examined for compliance with salient characteristic requirements specified herein. This element of inspection shall encompass all visual examinations and dimensional measurements.

7. Operational test. The test shall be an operational test to ascertain that the oiler performs as specified in the salient characteristic requirements. The testing media shall be 10W oil conforming to SAE J300.

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product sold in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this CID are met.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

Regulatory requirements. In accordance with Section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing the supplier's employees to undue hazards from the recovered materials.

Packaging, packing and marking. The packaging, packing, labeling, and marking shall be as specified in the contract or order.

CID based part identification number (PIN). The following PIN procedure is for Government purposes and does not constitute a requirement for the contractor. The PIN to be used for oilers acquired to this CID is created as follows:



1. Style number. The style of the oiler is identified by a single number (see table IV).

TABLE IV. Style number to style of oiler.

Style number	Style
1	Oval shape
2	Cylindrical shape
3	Hemispherical shape

2. Cross-referencing of PIN. The PIN of oilers in this CID differs from the previous edition in the following respects:

A-A-50474A	A-A-50474B
Finish number	Finish
1. Polished copy clear lacquer or varnish	Not designated
2. Brass coated or plated w/clear lacquer or varnish	Not designated
3. Copper coated or plated w/clear or varnish	Not designated
4. Lacquered w/opaque lacquer	Not designated
5. Nickel plated	Not designated
6. Baked on enamel finish	Not designated

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

Material number	Material
1. Metal	Not designated
2. HDPE	Not designated

Style number	Style number
1. 1	1 - Oval shaped
2. 2	2 - Cylindrical shaped
3. 3	3 - Hemispherical shaped

Notes. Purchaser should specify style of oiler, material of spout cover or cap, and PIN required for a specific procurement.

FED-STD-376 is available from Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

SAE J300 is available from the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.

MILITARY INTERESTS:

Custodian

Navy - YD

Review Activity

DLA - CS

User Activities

Army - EA
Navy - MC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Navy - YD

(Project 4930-0374)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

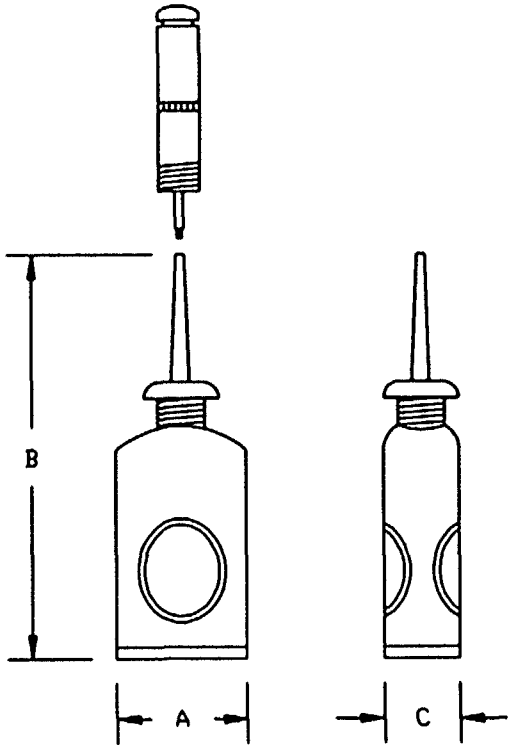


FIGURE 1. Oval shape typewriter oiler.

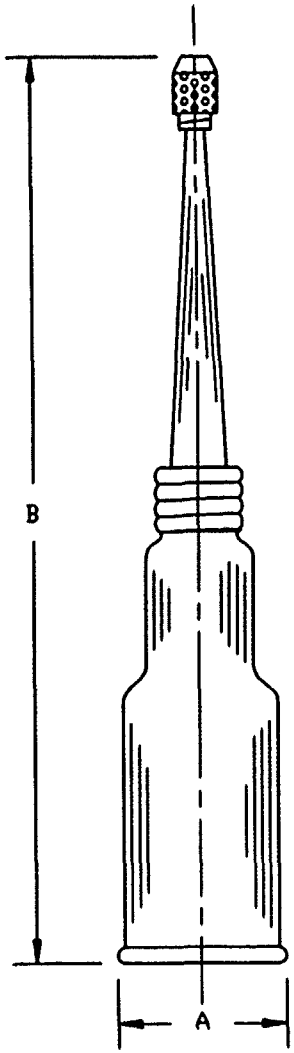


FIGURE 2. Cylindrical shape typewriter oiler.

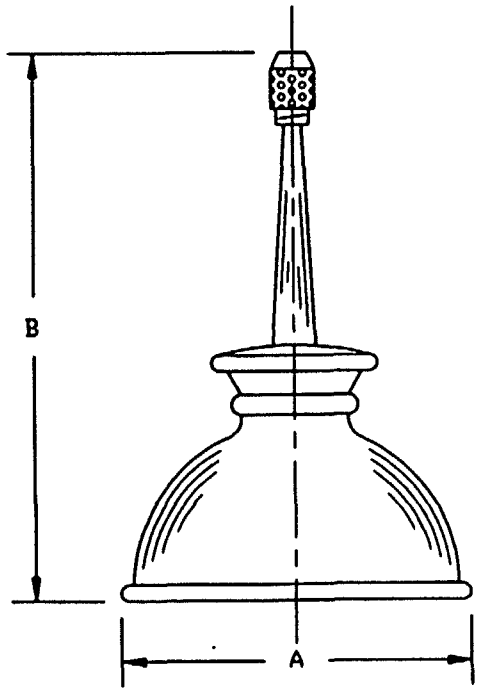


FIGURE 3. Hemispherical shape typewriter oiler.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.