INCH-POUND

A-A-52109
June 28, 1991

COMMERCIAL ITEM DESCRIPTION

TUBING, BIAS SEWN, OSNABURG OR BURLAP CLOTH

The General Services Administration has authorized the use of this commercial item description in preference to Military Specification MIL-T-40625.

Abstract. This commercial item description covers bias sewn tubing. The tubing is intended for baling clothing and textiles and as a cloth covering for bundles.

1. CLASSIFICATION

1.1 Classification. This tubing shall be of the following types and classes as specified (see 5.1).

Type I - Cotton osnaburg tubing, 31 inches in width

Type II - Jute burlap or a blended jute/kenaf burlap tubing

Class 1 - 37.5 inches in width
Class 2 - 58.5 inches in width

2. SALIENT CHARACTERISTICS

2.1 Material. The cloth shall be plain weave in construction and natural color. The cloth shall conform to the physical requirements specified in table I.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Commander, U.S. Army Natick Research, Development, and Engineering Center, ATTN: STRNC-IRT, Natick, MA 01760-5019.

AMSC N/A FSC 8135

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

TABLE I Physical requirements

Characteristic	Type I Osnaburg	Type II Burlap	Test Method 1/
Weight: oz/yd	6.8 Minimum	8.5 - 9.5	5040 (Full width short specimen method)
Yarns per inch			
Warp	38 Minimum	11 - 13	5050
Filling	24 Minimum	11 - 13	5050
Breaking Strength: pounds	60 Minimum	-	ASTM D 5034

NOTE: 1/ The test methods indicated, from FED-STD-191 Textile Test Methods, have been found acceptable to determine if the cloth meets the stated requirements. If the Government requires proof that the cloth meets the stated requirements, the test methods indicated shall be used.

2.2 Cloth tubing construction. The tubing shall be constructed from the specified cloth with a 45 ± 5 degrees of bias and the angle used within this range shall remain constant throughout the sewing operation. The tubing seams shall be Type SSa-1 or LSa-1 sewn with stitch Type 401 in accordance with FED-STD-751 and sewn at 4 ± 1 stitches per inch. The seam allowance shall be 1/2 ± 1/8 inch. The thread shall be nylon, soft or bonded finish, size E; 3 ply (minimum breaking strength of 9.0 pounds) for the needle and size B; 2 or 3 ply (minimum breaking strength of 6.0 pounds) for the looper. Alternately the thread shall be cotton, 4 ply, natural, Ticket No. 12 and No. 16 for the needle and looper respectively.

2.3 Length and width. The tubing shall be furnished in the lengths and widths specified in table II. The tubing shall be one continuous length or alternately two or more lengths may be placed on one roll provided no single piece is less than 40 linear yards. The total gross weight of the roll shall not exceed 200 pounds.

TABLE II Finished tubing dimensions

	Type I	Type II
Width, inches, ± 1/2 inch	31.0	class 1: 37.5 class 2: 58.5
Length, feet	120 minimum	135 minimum - 375 maximum

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

3. QUALITY ASSURANCE

3.1 Certification. The contractor shall certify, and maintain substantiating evidence, that the product offered meets the salient characteristics and requirements of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

3.2 Tubing examination. Lots of tubing shall be examined in accordance with MIL-STD-105 for the defects listed in table III. The lot size shall be expressed in units of rolls of tubing. The sample unit shall be one roll of tubing. The inspection level shall be S-3 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 6.5.

TABLE III. Tubing defects

Characteristics	Defects
Construction	
Stitches	More than five or less than three per inch. Less than 3/8 inch or more than 5/8 inch from edge of cloth.
Bias	Less than 40° or more than 50° on the angle.
bing	
gth	Less than 40 yards long per piece when two or more lengths per roll. Any roll exceeding 200 pounds. Width tolerance greater than ± 1/2 inch.

requirements. The offeror/contractor is encouraged to use
U in accordance with Public Law 94-580 to maximum extent

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:06Z
Check the source to verify that this is the current version before use.

4. PACKAGING

4.1 Packaging. Tubing shall be wound on a paperboard tube. Each roll of tubing, put-up as specified, shall be wrapped with 60-pound minimum basis weight kraft paper in such a way that the paper shall encircle the roll at least once with a minimum overlap of 3 inches, and the width of the paper shall be sufficient to fold over and protect the ends of the roll. Gummed paper tape, with a minimum width of 2-1/2 inches shall be applied to the overlap seam the full length of the roll and across each end. Alternately, each roll of tubing shall be enclosed in a polyethylene film tube, and the tube secured at both ends by heat sealing or mechanical ties.

4.2 Packing. Each wrapped roll shall be enclosed in bias-sewn tubing. The tube shall be secured by means of a mechanical tie, or by plastic ties with a lock-end. Alternately, a maximum of 325 pounds of rolls of kraft-wrapped tubing shall be packed in a snug-fitting double-walled fiberboard container known as a double cover, and shall consist of a body or joined liner and two covers. Corrugated fiberboard with a minimum bursting strength of 500 pounds shall be used. The container shall be strapped with metallic straps not less than 1/2 by 0.020 inch or non-methallic straps not less than 7/16 by 0.030 inch.

4.3 Marking. In addition to any special markings required by the contract or purchase order, rolls and shipping containers shall be marked in accordance with MIL-STD-129. Each roll shall have a piece ticket (identification tag) affixed with a 5-ply minimum cotton string or a plastic tag hanger. The tag shall have a reinforced eyelet and shall be legibly printed, using water insoluble ink, with the following information:

Procurement Agency
Contract or purchase order number
National stock number
Finish or greige mill
Item description
Roll number
Contractor
Lot number
Width
Piece number
Fiber content
Yardage


5. NOTES

5.1 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this document.
b. Type required (see 1.1).
c. Class required, when type II is specified (see 1.1)

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:06Z
Check the source to verify that this is the current version before use.

5.2 Part identification number (PIN). The PIN's to be used for the tubing required by this CID are created as follows:

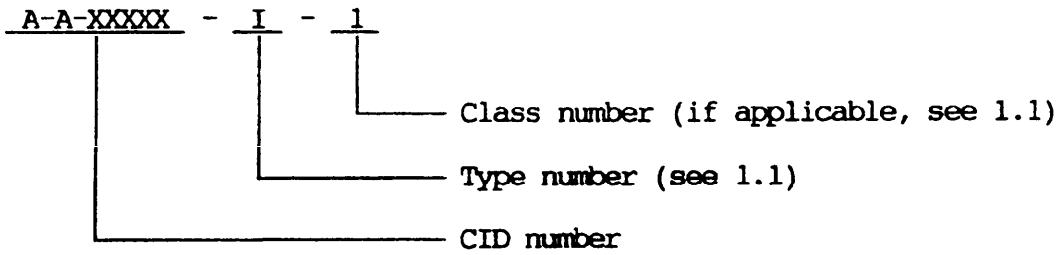

5.3 Source of government documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

5.4 Source of non-government documents. Copies of non-governmental documents are available from:

American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103

MILITARY INTERESTS:

Custodians

Army - GL
Navy - NU

Review Activity

Navy - SH

CIVIL AGENCY COORDINATING ACTITITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project 8135-0632

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.