INCH-POUND
A-A-52122A
26 November 2001
SUPERSEDING
A-A-52122
3 March 1993

COMMERCIAL ITEM DESCRIPTION

KIT, WATER PURIFICATION, EMERGENCY

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers an emergency water purification kit recommended for use in situations where municipal treated water is not provided or where the available water is suspected of being polluted.

2. SALIENT CHARACTERISTICS

2.1 Description. The water purification kit shall consist of the following components:

2.1.1 Tablet, chlorine, flocculating. The tablet shall conform to the requirements of A-A-52119, "Tablet, Chlorine, Flocculating, Emergency Water Purification".

2.1.2 Filter pouch. The filter pouch shall be fabricated from either bleached, 100 percent cotton or 65 percent polyester/35 percent cotton cloth conforming to the requirements specified in table I (yarn size 15/1 in warp and 7/1 in filling has been found to provide satisfactory material). The finished dimensions of the filter shall be 6 inches deep by 2.5 inches wide at the top opening. The filter shall be formed from a double layer of the cloth with a side and bottom seam. The bottom of the filter shall be semicircular. All raw edges shall be overedge stitched. The top opening edge of the filter shall be folded down and stitched.

2.1.3 Water treatment bag. The water treatment bag shall be constructed with 4 millimeter polyethylene material. The measurements of the treatment bag shall be 11.75 inches in length and 7.5 inches in width. All side seams shall be heat sealed with 1/8 inch seam width. The bag shall include tapes over wires to protect bag against piercing, and the two center tabs to aid in opening and closing.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Defense Supply Center Richmond (DSCR), ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 6850

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

TABLE I. Physical requirements.

Characteristic	Test method	Test results
Weave	Visual	Oxford
Air Permeability Per single layer ($ft^3/min/ft^2$)	5450 of FED-STD-191[1]	56 - 80
Weight (bleached), oz/sq yd	5041 of FED-STD-191	5.2 (min.)
Yarns/inch Warp Filling	5050 of FED-STD-191	81 (min.) 27 (min.)
Tearing strength, (lb) Warp Filling	ASTM D 1424[2]	 11 (min.) 8 (min.)
Breaking strength, (lb) Warp Filling	ASTM D 5034[3]	 136 (min.) 92 (min.)

[1] FED-STD-191, "Textile Test Methods".
[2] American Society for Testing and Materials (ASTM) D 1424, "Standard Test Method for Tearing Strength of Fabrics by Falling-Pendulum Type (Elemendorf) Apparatus" (DoD adopted).
[3] ASTM D 5034, "Standard Test Method for Breaking Strength and Elongation of Textile Fabrics (Grab Test)" (DoD adopted).

2.1.4 Emergency water purification procedure label. The procedure label shall conform to figure 1 and shall be embossed (printed) on the outside of the water treatment bag.

3. REGULATORY REQUIREMENTS

3.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. PRODUCT CONFORMANCE PROVISIONS

4.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

4.2 Metric product. Products manufactured using metric units will be considered on an equal basis with those manufactured using inch-pound units, provided that the product measurements fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, "Preferred Metric Units for General Use by the Federal Government", and that all other requirements of this CID are met.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

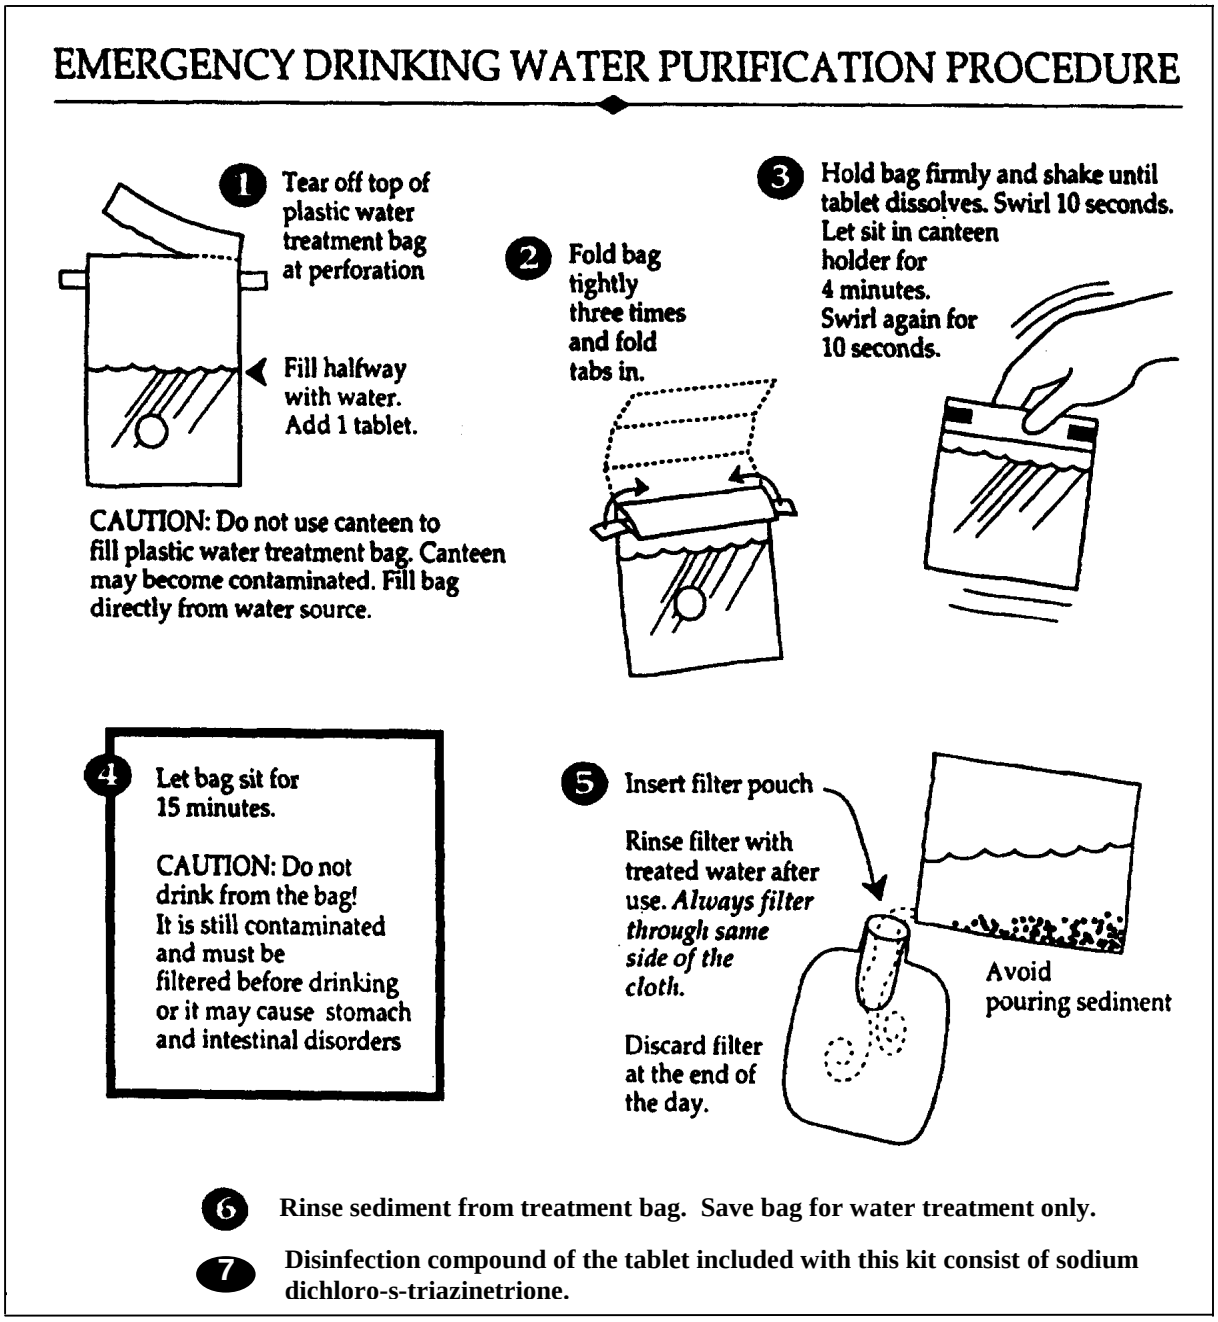

FIGURE 1. Procedure label.

5. PACKAGING

5.1 Preservation, packing, and marking. Unless otherwise specified (see 5.2, 5.3, 5.4, and 5.5), preservation, packing, and marking shall be as specified in the contract or order (see 6.2(b)).

5.2 Filter pouch. Each filter pouch shall be heat-sealed in a snug-fitting polyethylene bag. The polyethylene film shall be 0.001 (minimum) inch thick.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

5.3 Complete kit. Each complete kit, consisting of one water treatment bag, 30 flocculating tablets and three filter pouches (unit packed as specified in 5.2) shall be compactly arranged in a clear polyethylene film bag. The polyethylene film shall be 0.003 inch thick and the bag shall be closed by heat sealing. Care shall be taken to avoid excess air being entrapped in the bag during the sealing operation.

5.4 Intermediate packaging. Fifty kits, unit packed as specified in 5.3, shall be packed in an intermediate fiberboard box conforming to the style of a regular slotted box (RSC) of ASTM D 1974, "Standard Practice for Methods of Closing, Sealing, and Reinforcing Fiberboard Boxes" (DoD adopted). The kits shall be arranged on edge in two layers with 25 kits per layer. The layers shall be separated by a full length and width fiberboard pad. Approximate inside dimensions of the intermediate box shall be 21 7/8 inches in length, 7 3/8 inches in width, and 6 5/8 inches in depth. Each intermediate box shall be securely closed.

5.5 Packing. One hundred kits (two intermediate boxes) shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, of ASTM D 1974. Each shipping container shall be closed and waterproofed in accordance with ASTM D 1974. Approximate inside dimensions of the shipping container shall be 22 1/4 inches in length, 15 7/8 inches in width, and 7 3/8 inches in depth. Each shipping container shall be closed and waterproofed in accordance with ASTM D 1974.

6. NOTES

6.1 Sources of documents.

6.1.1 FAR. The FAR may be obtained from the Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250-7954. Electronic copies of FAR documents may be obtained from http://www.arnet.gov/far/.

6.1.2 Federal standards. Copies of federal standards may be obtained from General Services Administration, Federal Supply Service, Specification Section, 470 East L'Enfant Plaza SW, Suite 8100, Washington, DC 20407. Electronic copies of federal standards may be obtained from http://astimage.daps.dla.mil/quicksearch/.

6.1.3 ASTM standards. Copies of ASTM standards may be obtained from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959. Electronic copies of ASTM standards may be obtained from http://www.astm.org/.

6.2 Ordering data. Acquisition documents must specify the following information:

a. CID document number and revision.
b. Packaging requirements (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - GL
Navy - MC
Air Force - 68

Reviewers:
Army - EA, MD
Air Force - 50

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:
DLA - GS3

(Project 6850-1255)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.