INCH-POUND

A-A-52123
March 24, 1993

COMMERCIAL ITEM DESCRIPTION

BARS, BUCKING, RIVET

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-B-920.

1. CLASSIFICATION

1.1 Classification. This commercial item description covers bucking bars in the following types and sizes as specified (see 5.2).

Type		Nomenclature	Size (inches)
Type I	-	Tee head bucking bar	5 x 2-1/2
Type II	-	Universal bucking bar	6-3/8 x 1-7/8
Type IV	-	Bell bucking bar	7-1/2 x 3-3/8
Type V	-	Angle head bucking bar	4 x 1-1/2
Type VI	-	"L" Head bucking bar	4 x 1-3/4
Type VII	-	Straight tapered bucking bar	(see Figure 6)
Type VIII	-	Offset, one-way bucking bar	(see Figure 7)
Type IX	-	Tapered, offset, two-way bucking bar	(see Figure 8)
Type X	-	Trapezoidal bucking bar	8 x 3
Type XI	-	Channeled bucking bar	3-15/16 x 1-5/8

1.2 CID based part identification number (PIN). A document based PIN to identify type numbers is included in section 5. This identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

2. SALIENT CHARACTERISTICS

2.1 Design and construction. The bucking bars shall be of the design and dimensions shown in figures 1 through 10, respectively. The bucking bars

Beneficial comments, (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5017 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5120

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

shall be made of steel or ductile (nodular) iron. All dimensions shall be in inches. Tolerances shall be in accordance with standard commercial practice.

2.1.1 Hardness. The bucking bars shall be heat treated to attain a hardness within the range of Rockwell C38 to C45 of ASTM E 18.

2.1.2 Recess depth. For Types VII, VIII, and IX bars, the recess depth for the rivet heads shall be in accordance with standard commercial practice.

2.2 Finish. All radii shall be not less than 1/16 inch unless otherwise specified; all surfaces marked "f" (finish), and the cupped surfaces of the types VII, VIII, and IX bars shall be smooth and highly polished in accordance with standard commercial practice. No plating is allowed. The bucking bars shall be clean, free of cracks, sharp edges, sharp corners, and burrs.

2.3 Marking for identification. All bars shall be marked with the manufacturer's name or identifying symbol, the state or country of manufacture, unless otherwise specified. All markings shall be engraved, etched, molded or stamped (metal indented) directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

2.4 Workmanship. Details of workmanship shall be in accordance with the best commercial standards and practices. The item shall be clean and free of corrosion and debris (e.g., chips, shavings, slivers) or other foreign material. The item shall be free from manufacturing workmanship defects (e.g., sharp or rough external edges, corners or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the items's serviceability, durability, safety, or appearance.

3. QUALITY ASSURANCE

3.1 Certification. The contractor shall certify, and maintain substantiating evidence, that the product offered meets the salient characteristics and requirements of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

3.2 Metric product. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this Commercial Item Description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:06Z
Check the source to verify that this is the current version before use.

3.3 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

4. PACKAGING

4.1 Packaging, packing, and marking. The bucking bars shall be packaged, packed, and marked in accordance with the domestic or overseas requirements of ASTM D 3951, as applicable (see 5.2).

5. NOTES

5.1 Intended use. Rivet bucking bars are to be used for forming heads on the shanks of rivets during riveting processes.

5.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this document.
b. Type of rivet bucking bar required (see 1.1).
c. Type of packaging and packing requirements required (see 4.1).

5.3 Sources of documents.

5.3.1 Sources for nongovernment association documents.

ASTM D 3951 - Standard Practice for Commercial Packaging, and
ASTM E 18 - Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials, are available from:


The American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

5.3.2 Sources of governmental documents. Copies of military and federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

5.4 Part or identifying number (PIN). The PIN's to be used for items acquired by this CID are as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

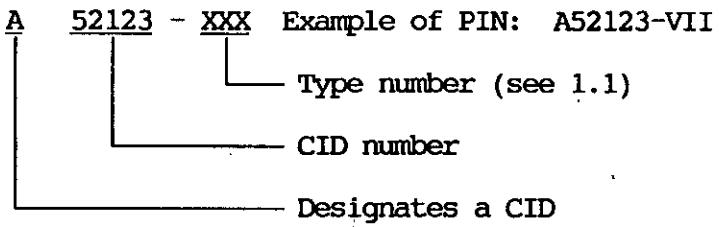

MILITARY INTERESTS:

Custodians

Army - GL
Air Force - 99

Review Activities

Army - ME
Air Force - 84

User Activities

Army - CR
Navy - MC, OS, YD

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project 5120-D018

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

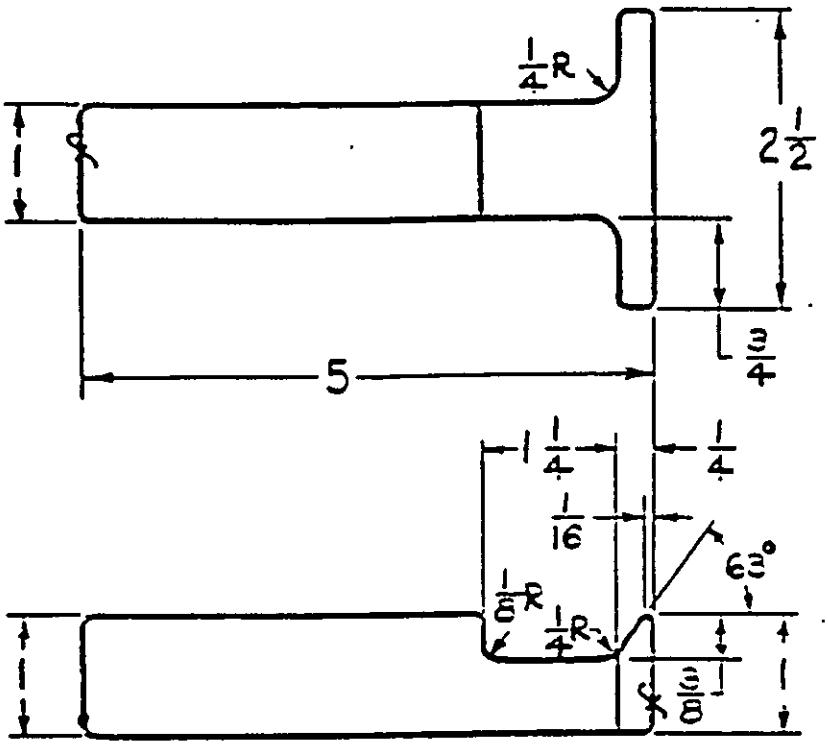


Figure 1. - Type I, Tee head bucking bar

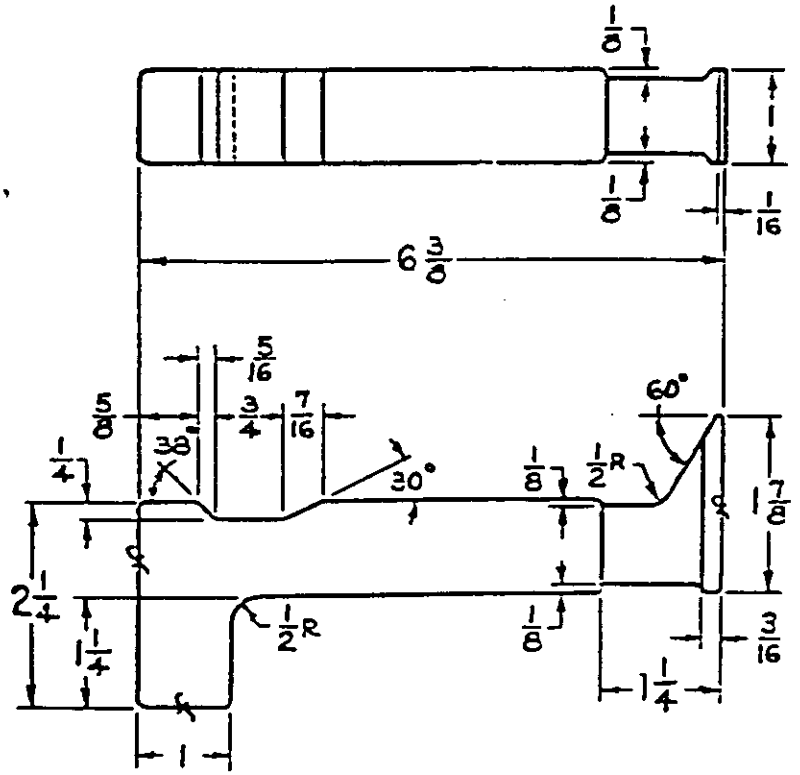


Figure 2. - Type II, Universal bucking bar

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:06Z
Check the source to verify that this is the currentversion before use.

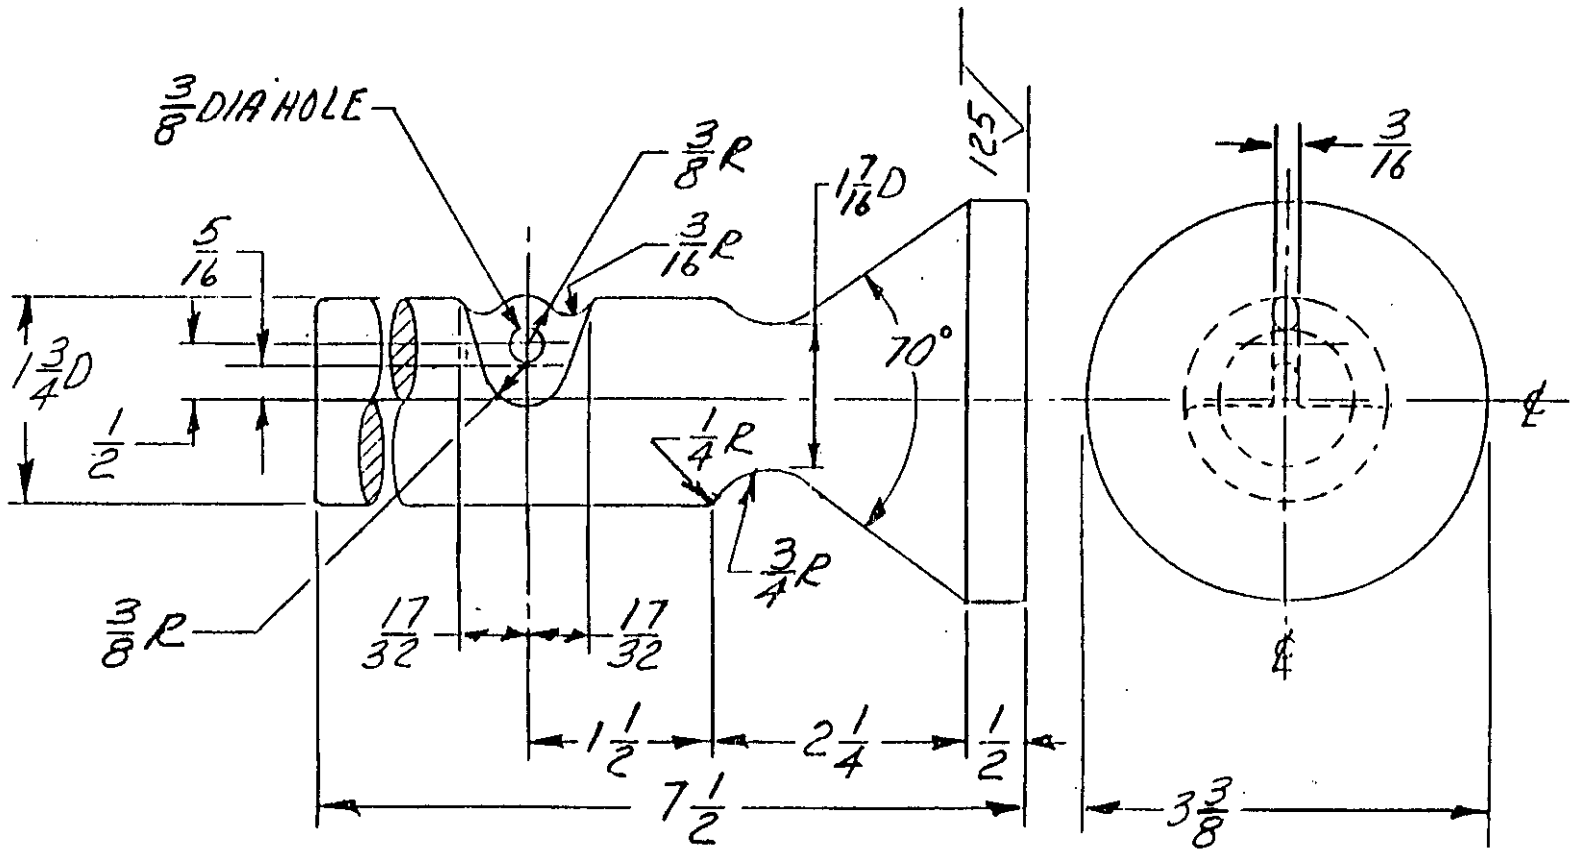


Figure 3. - Type IV, Bell bucking bar

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:06Z
Check the source to verify that this is the current version before use.

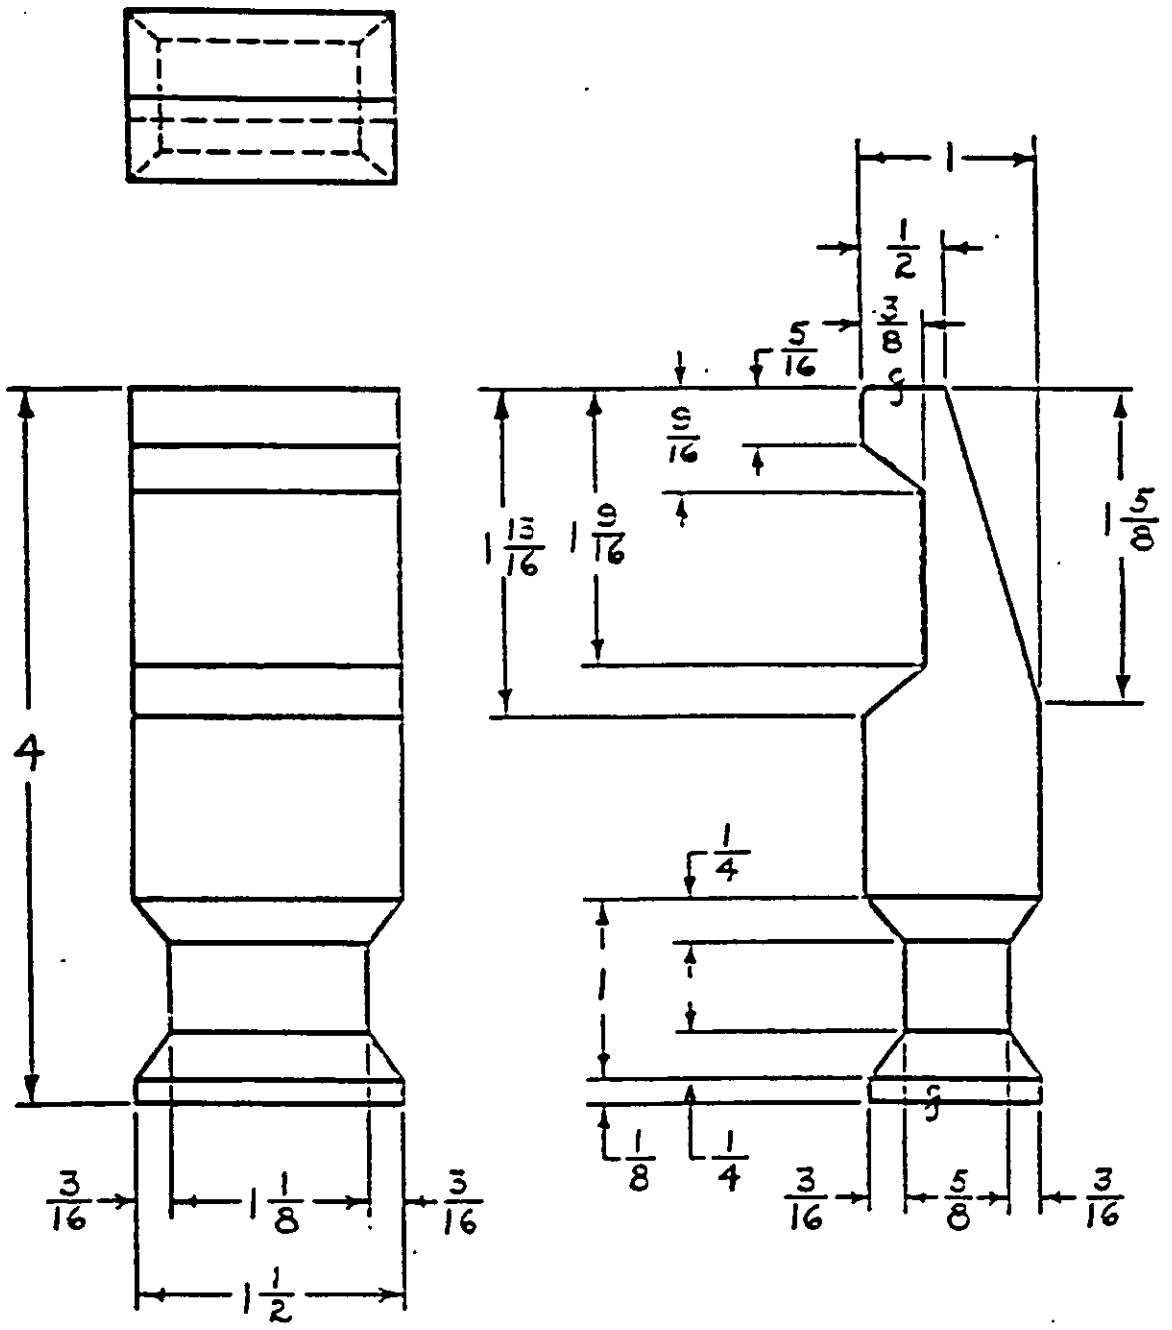


Figure 4. - Type V, Angle head bucking bar

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:06Z
Check the source to verify that this is the current version before use.


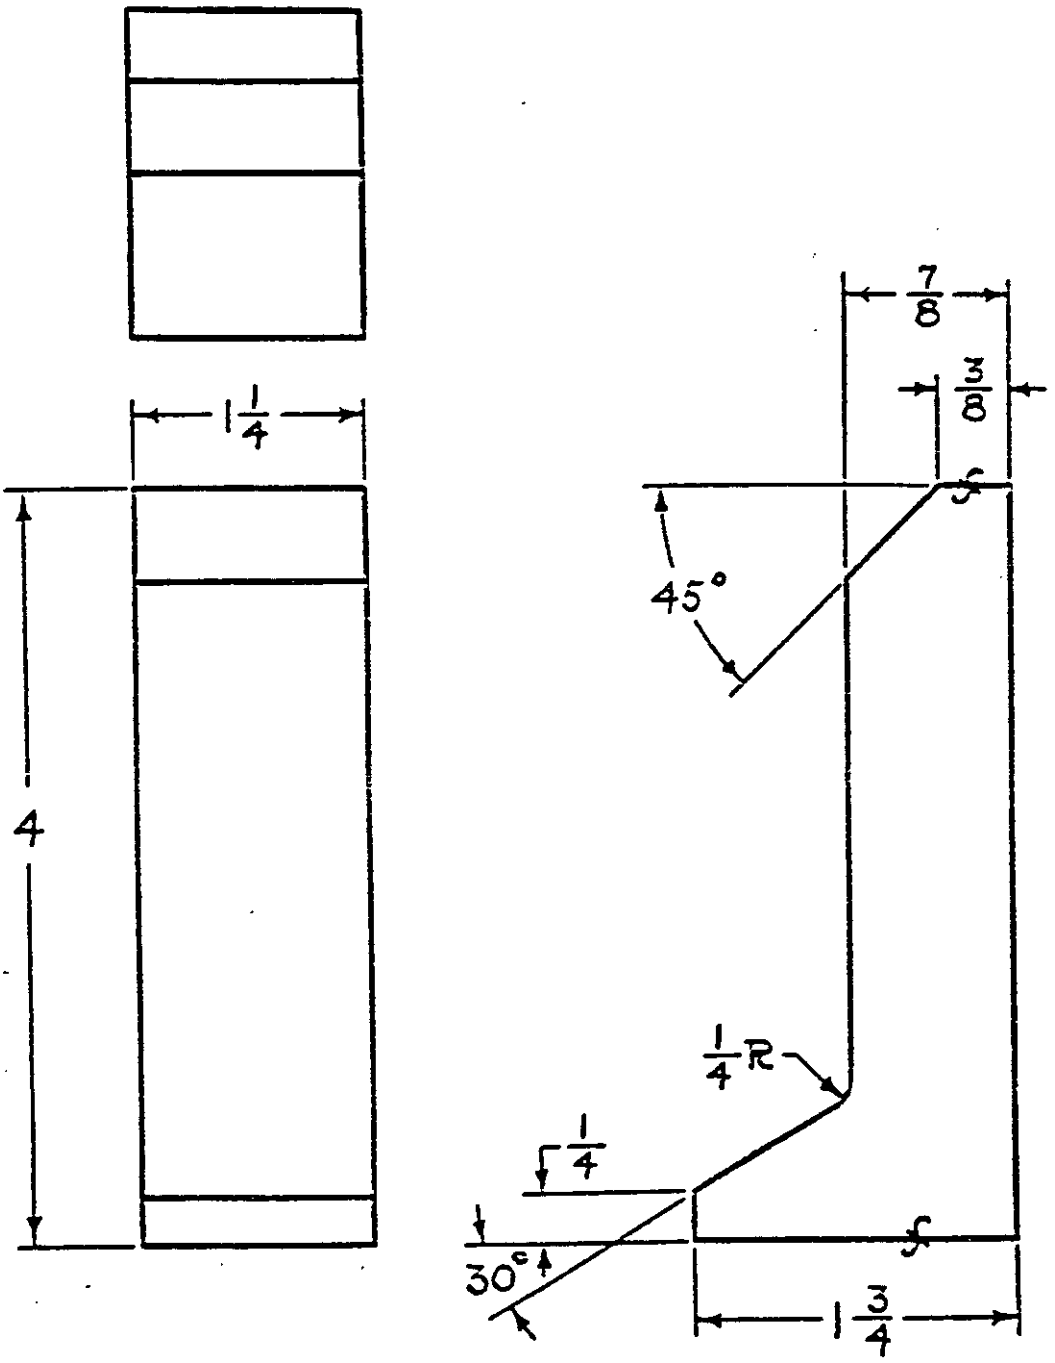


Figure 5. - Type VI, "L" Head bucking bar


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.



Size	Rivet Recess Dia. (C) Inches	Stock Dia. (D) Inches	O/A Length (A) Inches	Taper Length (B) Inches
1	3/8	1-5/8	24	*A/A
2	1/2	1-5/8	24	A/A
3	5/8	2	24	A/A
4	3/4	2	30	A/A
5	7/8	2-1/8	30	A/A

* Any Acceptable


Figure 6. - Type VII, Straight tapered bucking bar

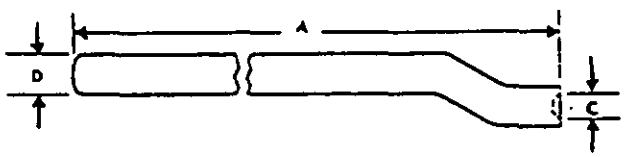

Size	Rivet Recess Dia. (C) Inches	Stock Dia. (D) Inches	O/A Length (A) Inches
1	1/2	1-5/8	24
2	5/8	2	24
3	3/4	2	30
4	7/8	2-1/8	30

Figure 7. - Type VIII, Offset, one way bucking bar

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

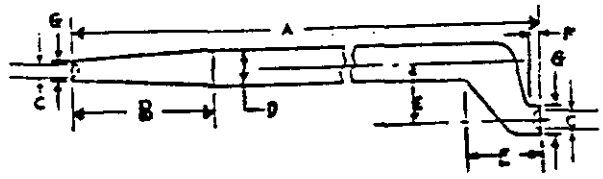

Size	Rivet Recess Dia. (C) In.	Taper Lg. (B) In.	O/A Lg. (A) In.	Stock Dia. (D) In.	Dim (E) Inches	Dim (F) Inches	Dia. (G) Inches
1	7/32	4-1/4	23-1/4	3/4	1	3/16	5/16
2	1/2	4-1/4	23-1/4	1-1/2	2	3/8	5/8

Figure 8. - Type IX, Offset, two way bucking bar

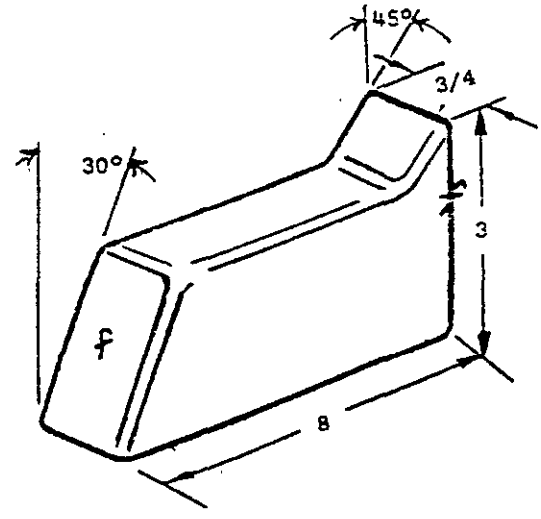


Figure 9. - Type X, Trapezoidal bucking bar

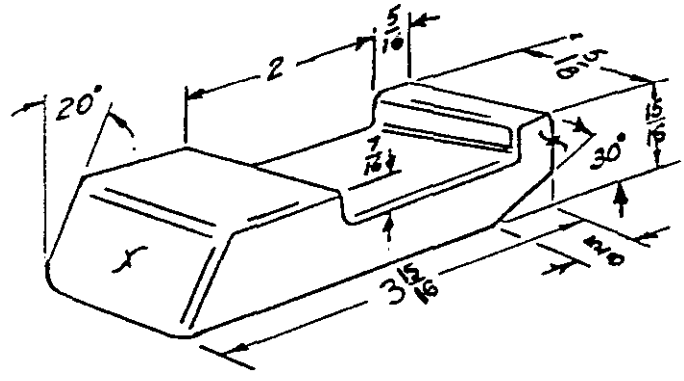


Figure 10. - Type XI, Channeled bucking bar

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:06Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-52123	1993 March 24

3. DOCUMENT TITLE

BARS, BUCKING, RIVET

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON/DSN
U.S. Army Natick RD&E Center	508-651-4531	256-4531
c. ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center ATTN: SATNC-UXT Natick, MA 01760-5017	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil - Downloaded: 20261026T09:06Z
Check the source to verify that this is the current version before use.