INCH-POUND

A-A-52125
April 16, 1993

COMMERCIAL ITEM DESCRIPTION

CAN, RADIATOR FILLING AND CAN SPRINKLING; PLASTIC

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-C-43522.

1. CLASSIFICATION

1.1 Classification. This Commercial Item Description (CID) covers the requirements for plastic water cans (see 5.2).

Type I - 12 quart with spout
Type II - 12 quart with sprinkling head

1.2 CID based part identification number (PIN). A document based PIN to identify type numbers is included in section 5. This identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

2. SALIENT CHARACTERISTICS

2.1 Design and construction. Both type water cans shall be capable of containing 12 quarts of water and shall show no evidence of leakage. The water cans shall be made of polyethylene conforming to type I or II, class A or B, of ASTM D 1248. Items made by rotational molding shall be made of virgin material only. Clean, unburned plastic material in the form of imperfect parts, runners or other scrap of the same composition as the virgin material and produced in the molding or finishing operation may be reground and mixed with the virgin material for injection molding, with a maximum of 50% reground. The cans shall have a pouring spout long and high enough so that no spillage occurs. The water cans shall be sufficiently rigid so that there shall be no perceptible distortion when filled to capacity. When

Beneficial comments, (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5017 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 7240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

filled to capacity, the cans shall be capable of being tilted to pour out the contents without noticeable distortion or difficulty from the tendency of the side walls to distort. After cans are filled to capacity, the cans can be tilted toward the spout to an angle of 30° without spillage at the spout or sprinkling head areas. The handle shall be strong enough to withstand a force twice that of the weight of the can's capacity of water without distortion.

2.1.1 Type I. The type I water can shall have one or more handles to be used for carrying and pouring. The end of the pouring spout shall be not more than 1 inch in diameter and not less than 3/4 inch in diameter. The wall thickness of the can shall be not less than 0.075 inch thick.

2.1.2 Type II. The type II water can shall be constructed the same as the type I, except that it shall be equipped with a sprinkler head not less than 3-1/4 inches in diameter. The sprinkler head shall be removable for cleaning without the use of tools. The wall thickness of the can shall be not less than 0.075 inch thick.

2.2 Finish. The finished water cans shall be in accordance with the manufacturer's standard commercial practice. The cans shall be free from blisters, mold marks, cracks, lumps, or other defects which will affect the appearance or utility of the water can. The color of the water cans shall be as regularly furnished by the supplier.

2.3 Marking for identification. The water cans shall be legibly and permanently marked with the manufacturer's name or trademark.

3. QUALITY ASSURANCE

3.1 Certification. The contractor shall certify, and maintain substantiating evidence, that the product offered meets the salient characteristics and requirements of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

3.2 Metric product. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this Commercial Item Description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

3.3 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

4. PACKAGING

4.1 Packing, palletization, and marking. The water cans shall be packed, palletized, and marked in accordance with the domestic or overseas requirements of ASTM D 3951, as applicable (see 5.2).

5. NOTES

5.1 Intended use. The type I water can is intended for use in filling the radiators of military vehicles. The type II water can is intended for use in sprinkling water on small planted areas within military compounds.

5.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this document.
b. Type of can required (see 1.1).
c. Type of packing, palletization, and marking requirements required (see 4.1).

5.3 Sources of documents.

5.3.1 Sources for nongovernment association documents.

ASTM D 1248 - Polyethylene Plastics Molding and Extrusion Materials, and
ASTM D 3951 - Standard Practice for Commercial Packaging, are available from:


The American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

5.3.2 Sources of governmental documents. Copies of military and federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

5.4 Part or identifying number (PIN). The PIN's to be used for items acquired by this CID are as follows:

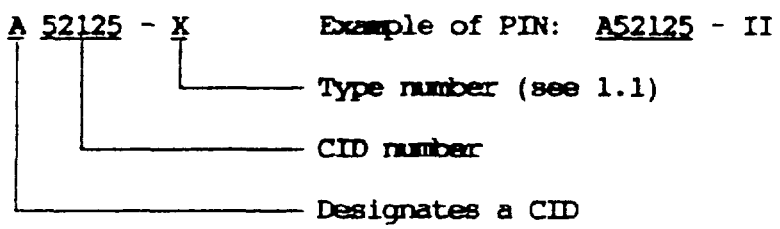

MILITARY INTERESTS:

Custodians

Army - GL
Air Force - 99

Review Activities

Army - ME
Air Force - 84

User Activities

Army - AT
Navy - CG, MC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project 7240-0258

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number an letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarifi requirements on current contracts. Comments submitted on this form do not constitute or imply author waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-52125	1993 April 16

3. DOCUMENT TITLE

CAN, RADIATOR FILLING AND CAN SPRINKLING; PLASTIC

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) DSN (If applicable)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON/
U.S. Army Natick RD&E Center	508-651-4531	256-4531
c. ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center ATTN: SATNC-UXT Natick, MA 01760-5017	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 NATICK OP3, JUL 91 *Previous editions are obsolete*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.