INCH-POUND

A-A-52129
June 30, 1993

COMMERCIAL ITEM DESCRIPTION

FID

The General Services Administration has authorized the use of this commercial item description in preference to MIL-F-3113.

1. CLASSIFICATION

1.1 Classification. This commercial item description covers fids for splicing fiber rope in the following types and sizes as specified (see 5.2):

Type I - Hand

Size 1 - 6 inches by 1 3/8 inches
Size 2 - 8 inches by 1 1/2 inches
Size 3 - 10 inches by 1 1/2 inches
Size 4 - 12 inches by 1 3/4 inches
Size 5 - 14 inches by 1 3/4 inches
Size 6 - 16 inches by 2 inches
Size 7 - 18 inches by 2 inches
Size 8 - 18 inches by 3 inches
Size 9 - 20 inches by 2 1/4 inches
Size 10 - 24 inches by 3 inches

Type II - Standing

Size 1 - 24 inches by 4 inches
Size 2 - 30 inches by 4 inches
Size 3 - 36 inches by 6 inches

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5017, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5120

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:06Z
Check the source to verify that this is the current version before use.

1.2 CID based part identification number (PIN). A document based PIN to identify type numbers is included in section 5. This identification numbering procedure is for Government purpose and does not constitute a requirement for the contractor.

2. SALIENT CHARACTERISTICS

2.1 Design and construction. The fid shall be of the type and size shown on figures 1 and 2. Fids shall be fabricated of straight-grained, thoroughly seasoned wood. Wood for the type I and II fids shall be hickory, hard maple, or ash. No defects shall be permitted in any part of the fid. Moisture content of the wood at the time of fabrication shall not exceed 18 percent when tested in accordance to ASTM D 4442.

2.2 Finish. Fids shall be smoothly surfaced and immersed in linseed oil conforming to A-A-371 to thoroughly penetrate the wood.

2.3 Marking for identification. The fids shall be marked with the manufacturer's name or readily identifiable trademark.

2.4 Workmanship. Details of workmanship shall be in accordance with the best commercial standards and practices. Paints, coatings, and finishes shall be smooth, adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g. sharp or rough external edges, corners or surfaces) and material workmanship defects (e.g. pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

3. QUALITY ASSURANCE

3.1 Certification. The contractor shall certify, and maintain substantiating evidence, that the product offered meets the salient characteristics and requirements of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

3.2 Metric product. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this Commercial Item Description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:06Z
Check the source to verify that this is the currentversion before use.

3.3 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

4. PACKAGING

4.1 Packaging, packing, and marking. The fids shall be packaged, packed, and marked in accordance with the domestic or overseas requirements of ASTM D 3951, as applicable (see 5.2).

5. NOTES

5.1 Intended use. Fids are intended to be used for opening and separating strands of rope for splicing.

5.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this document.
b. Type and size of fid required (see 1.1).
c. Type of packaging, packing, and marking requirements required (see 4.1).

5.3 Figures. The figures herein are descriptive and not restrictive, and are not intended to preclude the purchase of fids otherwise conforming to this CID.

5.4 Sources of documents.

5.4.1 Sources for nongovernment association documents.

ASTM D 3951 - Standard Practice for Commercial Packaging, and
ASTM D 4442 - Direct Moisture Content Measurement of Wood and Wood-Based Materials, are available from:

The American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187


5.4.2 Sources of governmental documents. Copies of military and federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

5.5 Part or identifying number (PIN). The PIN's to be used for items acquired by this CID are as follows:

AA 52129 - X - X (Example: AA52129-I-5)

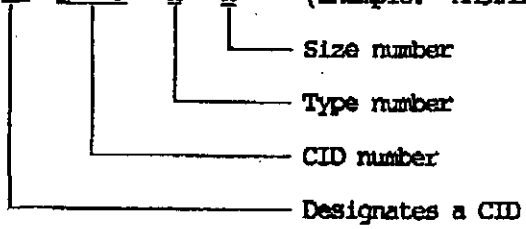

MILITARY INTERESTS:

Custodians

Army - GL
Air Force - 99

Review activity

Air Force - 84

User activities

Navy - MC, SH, YD

CIVIL AGENCY COORDINATING ACTIVITY:


GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project 5120-D019


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

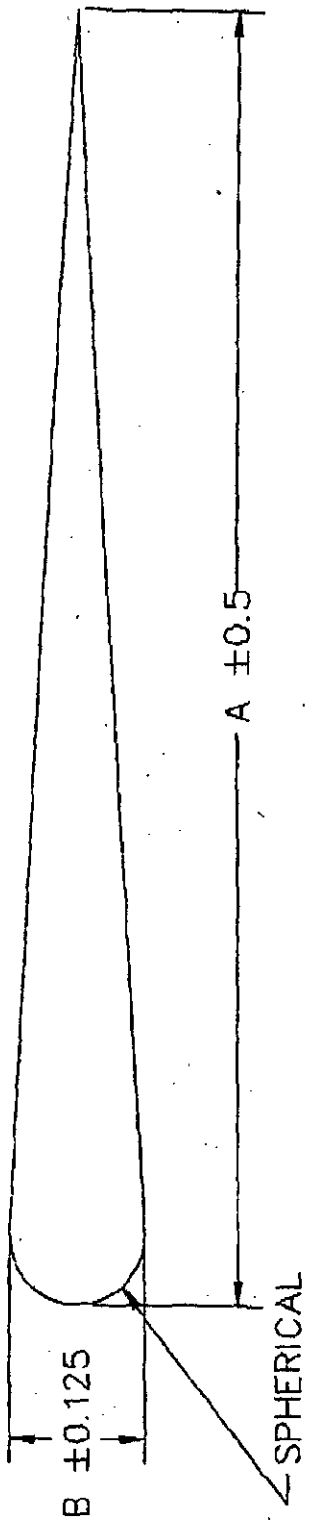

SIZE	DIMENSION "A"	DIMENSION "B"
1	6.0 INCHES	1.375 INCHES
2	8.0 INCHES	1.500 INCHES
3	10.0 INCHES	1.500 INCHES
4	12.0 INCHES	1.750 INCHES
5	14.0 INCHES	1.750 INCHES
6	16.0 INCHES	2.000 INCHES
7	18.0 INCHES	2.000 INCHES
8	18.0 INCHES	3.000 INCHES
9	20.0 INCHES	2.250 INCHES
10	24.0 INCHES	3.000 INCHES

FIGURE 1 - TYPE I (HAND FID)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

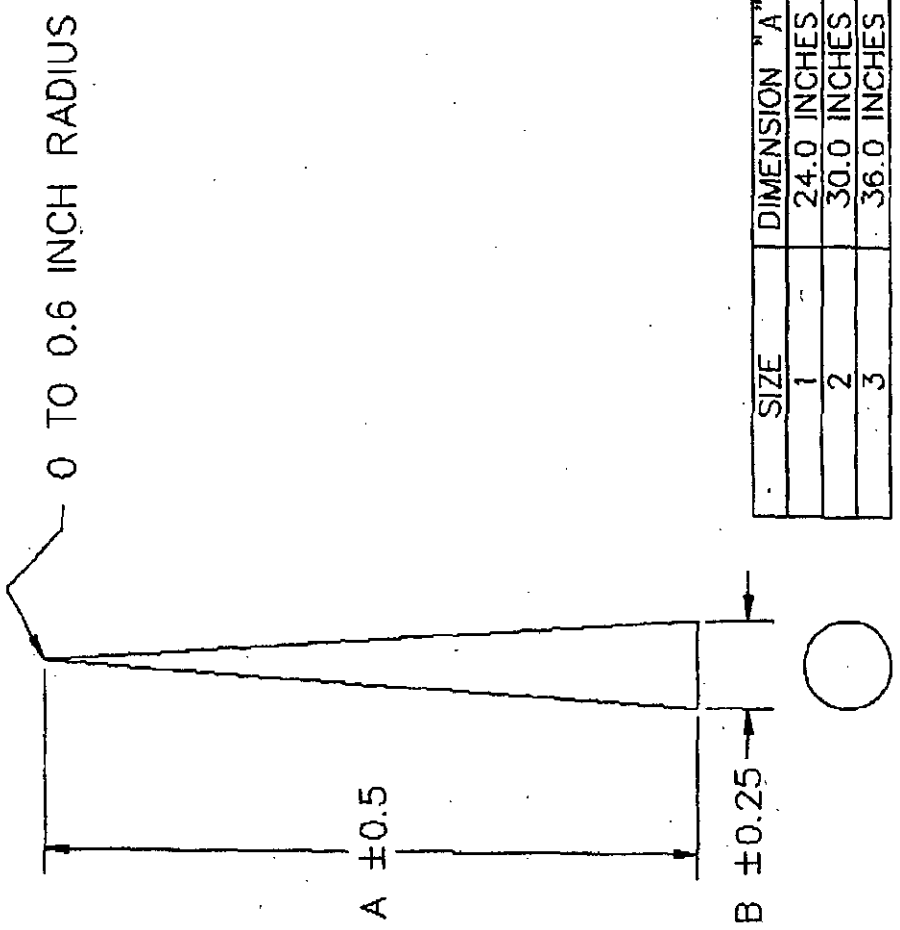

SIZE	DIMENSION "A"	DIMENSION "B"
1	24.0 INCHES	4.00 INCHES
2	30.0 INCHES	4.00 INCHES
3	36.0 INCHES	6.00 INCHES

FIGURE 2 - TYPE II (STANDING FID)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.